

PENDANTS: one

MOUNTING: mini canopy 29mm (1.1') in diameter x 12mm (0.5') deep

LAMPING: 1.5w LED or 20w xenon

COAX: adjustable. 3000mm (10') standard / up to 30500mm (100') maximum

MATERIALS: porcelain, borosilicate glass, braided metal coaxial cable, electrical components, brushed nickel canopy

WEIGHT: approximately 0.5kg (1.1lb)

TRANSFORMERS: remote mounted (fixture does not hook directly to a junction box).

DESCRIPTION

The 'm' designation in this 21 variant refers to the mini canopy size. The mini canopy is just over 29mm (1.1') in diameter and 12mm (0.5') deep, which creates a subtle profile that will essentially disappear into the application surface. The pendant drop lengths on this light fixture are adjustable up to the specified maximum.

Inspired by the sporadic, discordant arrangement of barnacles on a rock surface, the 21 is fabricated from thin sheets of porcelain wrapped around a trumpet shaped borosilicate diffuser. Each diffuser houses a low voltage lamp. A strong contrast is established between the organically distributed soft light passing through the white porcelain skin and the sharp, crisp light passing through the borosilicate glass diffuser.


BOCCI

MINI CANOPY

21.1m

Design by Omer Arbel
 PRODUCT SPECIFICATION



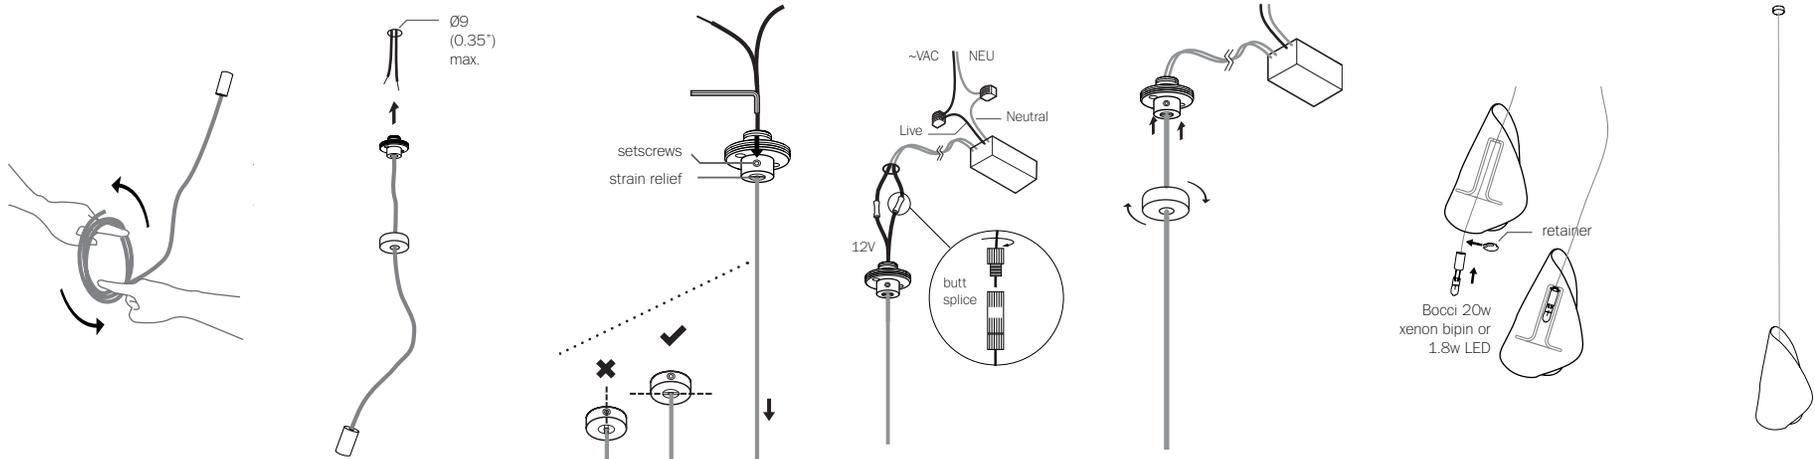

1

Very carefully uncoil the braided coaxial cable in a spool like manner. Insert your index fingers into opposite sides of the roll then rotate your fingers around each other to unroll the coaxial cable.

Use patience: allow the cable to uncoil completely to avoid kinks.

2

Drill a maximum 9mm (0.35") diameter hole in ceiling material. Pull low voltage house wire through the hole.

Note: There must be adequate backing, not just the drywall. This low voltage wire will run to a remote mounted transformer.

3

Thread the coaxial cable through the canopy, use a 2mm Allen key to loosen the setscrew in the canopy and gently feed the cable through until you have reached your desired drop length.

Use Allen key to tighten the setscrew to hold the strain relief and secure the coaxial cable at its new length. Perform a gentle tug test to ensure it is secure.

DO NOT OVERTIGHTEN.

Note: The strain relief is a black plastic collar around the coaxial cable. There is a single slot opening on the side of the strain relief component. It is essential that this opening is oriented at 90 degrees to set screw chamber. There can be no contact between the set screw and the cable.

RISK OF ELECTRIC SHORT!

4

Primary: connect live and neutral power supply leads to supply wiring. Line with Live wire and Neutral with Neutral.

Secondary: Connect (+/-) wires to the coaxial cable using #16 butt splices, provided (stagger the splices).

For multiple pendant installations, ensure that the braided outer wires are all connected to one 12V output wire and all inner insulated wires are connected to the other or a short will occur.

Wires are 1.02mm (18AWG).

Note: Insulated core is positive and braided exterior is negative.

5

The client is responsible to ensure fasteners are attached to a robust structural substrate.

Affix mini-canopy to ceiling surface with fasteners provided. Twist the threaded cover into place.

6

Thread the coaxial cable through the shade, followed by the borosilicate diffuser and finally slide on the retainer.

Bocci 1.5w LED or 20w xenon lamps are included. Lamping is transformer specific.

Plug the lamp into the socket. Do not touch the lamp with your bare hands.

7

Clean fingerprints from glass surfaces.

Turn fixture on.

BOCCI

MINI CANOPY

21.1m

Design by Omer Arbel
 PRODUCT INSTALLATION INSTRUCTIONS



LOW VOLTAGE LUMINAIRE
 E476186