

- PENDANTS: one
- MOUNTING: pearl chrome metal mounting plate 70mm (2.75") in diameter
- LAMPING: 1w LED
- INSTALLATION: threaded on - wall or ceiling mount
- MATERIALS: blown glass, copper mesh, electrical components, metal mounting plate
- WEIGHT: approximately 0.7kg (1.5lb)
- TRANSFORMERS: remote mounted. Transformers included

DESCRIPTION

The 's' designation in this variation on the 76 refers to it being surface-mounted, with transformers mounted remotely. This surface light has a discrete 70mm (2.75") mounting plate designed for installation on walls or ceilings.

A vacuum is introduced to a strata composed of hot white and clear glass with copper mesh between. The vacuum causes the white layer to pull away through the embedded mesh, leaving numerous tendrils of white glass suspended within an interstitial space as it goes.


BOCCI

SURFACE LIGHT

76s

Design by Omer Arbel
 PRODUCT SPECIFICATION



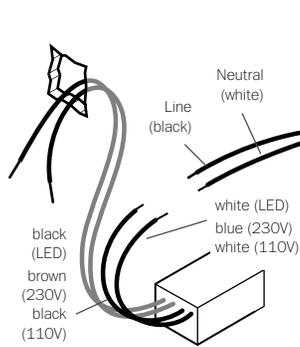


1

Mount transformer remotely and route output wiring from transformer to surface mounted light location.

Connect the black wire to black and white wire to white wire.

For multiple surface mount installations, ensure that the braided outer wires are all connected to one 12V output wire and all inner insulated wires are connected to the other or a short will occur.


Note: Standard junction boxes are not compatible with the 76s. The surface mounted light cover plate mounts directly to the wall. Transformers must be remote mounted in a close by, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to ensure code compliance.

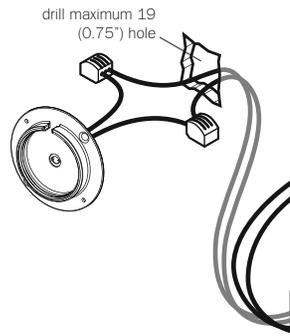

2

Drill a maximum 19mm (0.75") diameter hole.


Join transformer wiring to back plate wiring using connectors provided.

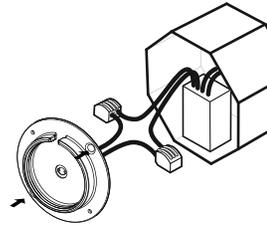

3

Tuck wiring into wall opening and affix the back plate with fasteners provided.

Stagger the provided connectors so that they can be passed through the hole.

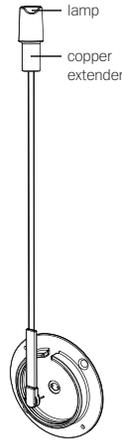

4


Boccia 1w LED lamp included.

Insert LED lamp into flexible copper extender.

Push the flexible copper extender through the open slot on the sconce plate and plug end into the sconce socket.

Purchase replacement lamps online at www.bocci.ca/lamps

Note: when using a dimmer use only low voltage electronic dimmers to ensure the fixture works properly.

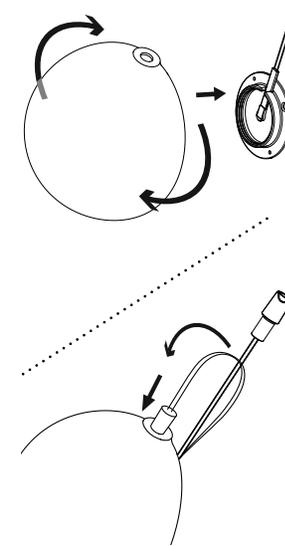


5

Hold lamp wires against the wall to ensure they do not interfere with spinning glass.

Gently thread glass hemisphere onto cover plate. Do not over tighten.

Bend the insulated wires and insert the lamp into the small hole in the pendant. Ensure that the lamp does not touch the inner glass bubble.

Note: when using a dimmer use only low voltage electronic dimmer.

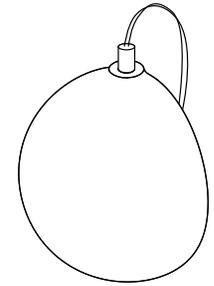

6

Clean fingerprints from glass surfaces.

Turn fixture on.

BOCCI

SURFACE LIGHT

76s

Design by Omer Arbel
 PRODUCT INSTALLATION INSTRUCTIONS