




GABRIEL SCOTT

EST. 2012

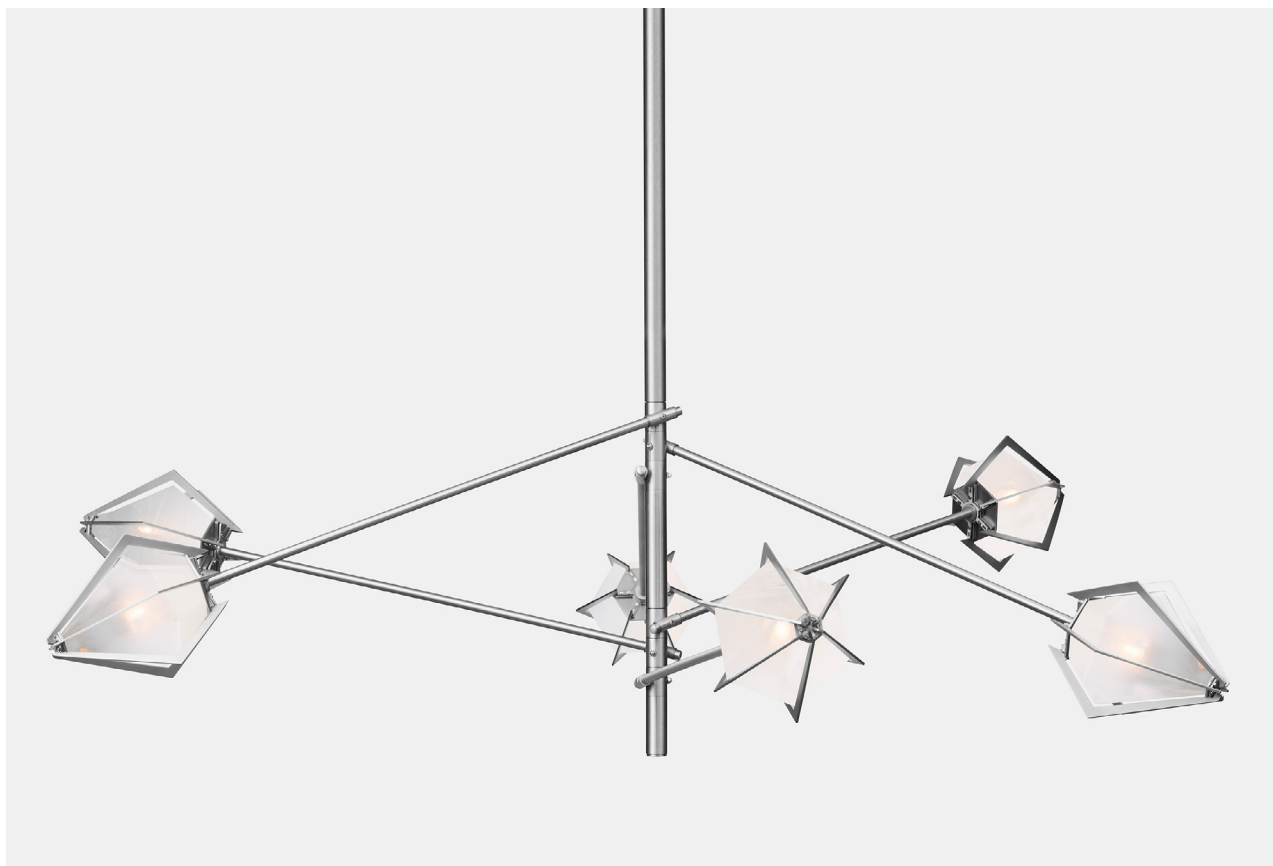



**HARLOW**  
**Large Spoke Chandelier**

Satin Nickel &  
Alabaster White

Elegant sculptural light fixture inspired by jewelry design featuring a mold blown glass gem in a chic metallic setting.

Harlow is available in various color ways, and held in a metallic frame referencing a prong setting, the blown glass makes for a beautiful diffuser of soft light, while the prong inspired hardware adds glamour to each fixture.

All Gabriel Scott pieces are handmade in Canada.

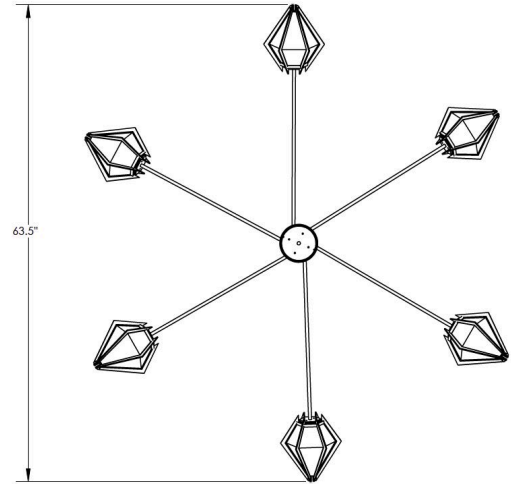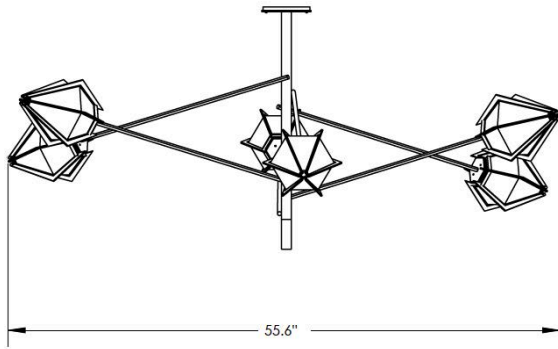

## SPECIFICATIONS

### Standard Finishes:

Blown Glass: Alabaster White or Smoked Gray

Metal: Blackened Steel, Satin Nickel,  
Satin Brass, Satin Copper or Satin Bronze

### Specifications:

Dimensions: 63.5" x 55.6" x 20.0" H + Stem or 23.0" minimum drop

161.29cm x 141.22cm x 50.8cm H + Stem or 58.42cm minimum drop

Weight: 55 lbs / 25 kg

Light Source: 12V 6 Watt LED (included)

LED Drivers: E60R12DC - 120V  
UVC1250TD - 220V

Standard Lead time: 12 - 14 weeks

### Stems & Canopies:

Standard Stem Lengths: 3", 6", 9" or 12"

8 cm, 15 cm, 23 cm or 31 cm

(additional lengths are available upon request)

Standard Canopy: 5" x 0.5" / 12 cm x 1.3 cm

Deep Canopy: Dimensions on request.

Custom finishes available upon inquiry.

Made and assembled in Canada. Item is UL & CE listed.




## STANDARD FINISHES

### Blown Glass:




Alabaster White




Smoked Gray

### Metal:



Blackened Steel



Satin Nickel



Satin Brass



Satin Copper





Satin Bronze

# LED DRIVER

## E60R12DC - 120V

Magnitude's E60R12DC dimmable voltage LED driver is class 2 rated and designed to operate with any standard MLV/ Incandescent TRIAC (Leading edge) dimmer switch. The driver's low profile aluminum case makes it the perfect choice for under cabinet lights, tape lights and various LED fixtures. Our electrical specification includes Auto Reset, over current and short circuit protection. Efficiency of 90% and higher allows the driver to operate at low temperatures.

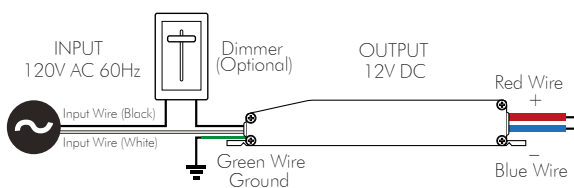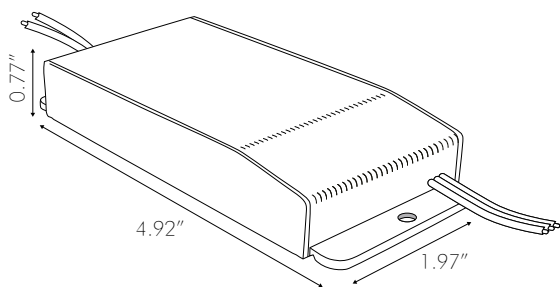

\*For smooth dimming 8W minimum load is required

### Features:



- Dimmable with any standard MLV/Incandescent
- TRIAC- (Leading edge) dimmer switch
- Dim down to 1%
- Super compact ALUMINUM CASE.
- Class 2
- UL 8750
- IP67 - Withstands wet and salty conditions.
- Auto-Reset Protection for short circuits & over-voltage.
- FCC 15 part 2

### Specifications:

|                             |                          |
|-----------------------------|--------------------------|
| Max Load                    | 60W                      |
| Input Voltage               | 120V AC                  |
| Input Current at Max Load   | 0.61 A                   |
| Output Voltage              | 12V DC                   |
| Output Current at Max load  | 5A                       |
| Power Factor                | 0.95                     |
| Efficiency                  | > 90 %                   |
| Operating Temp.             | -20c ~ 70c (-4F ~ 158F)  |
| Overcurrent                 | Yes                      |
| Over temperature            | Yes                      |
| Open circuit protection     | Yes                      |
| Input Wires (White / Black) | 18 AWG                   |
| Output Wires (Red / Black)  | 14 AWG                   |
| Weight                      | 255g                     |
| Dimensions (inches)         | 4.92" x 1.97" x 0.77"    |
| Dimensions (cm)             | 12.5 cm x 5 cm x 1.95 cm |

# LED DRIVER

## UVC1250TD - 220V

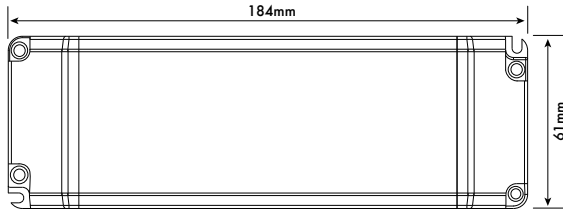

### Features:

- Constant voltage output
- Fully isolated
- Short circuit, over current and over voltage protection up to 80% efficient.
- Fire resistant plastic cover
- Compatible with leading and trailing edge dimmers
- 20 - 100% Dimming Load and Dimming range
- Mains dimmable
- Screw terminals
- IP44 design for indoor use
- 2 years warranty

### Specifications:

|                       |                             |
|-----------------------|-----------------------------|
| Part Code             | UVC1250TD UVC2450TD         |
| Voltage               | 220V ~ 240VAC               |
| Frequency             | 50-60 Hz                    |
| Current               | 0.4A                        |
| Inrush Current        | <2.5A                       |
| Power Factor          | 0.95                        |
| Load Voltage          | 12V                         |
| No Load Voltage       | 12V                         |
| Current               | 4.16A                       |
| Power                 | 50W                         |
| Power Factor          | >0.95                       |
| Efficiency (TYP)      | >80%                        |
| Over Load             | Auto-recovery               |
| Short Circuit         | Auto-recovery               |
| Over Voltage          | Auto-recovery               |
| Operating Temperature | -20 ~ +50°C                 |
| Storage Temperature   | -40 ~ +70°C                 |
| Relative Humidity     | 5 ~ 95%                     |
| Lifetime              | 50K hrs at TC max (85°C)    |
| Connections           | Screw terminal on I/P & O/P |
| Weight                | 200g                        |
| Dimensions (inches)   | 7.2" x 2.4" x 1.25"         |
| Dimensions (cm)       | 18.4 cm x 6 cm x 3.2 cm     |