
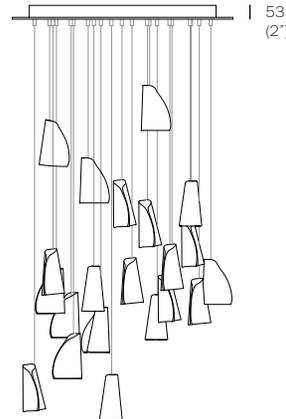


# BOCCI

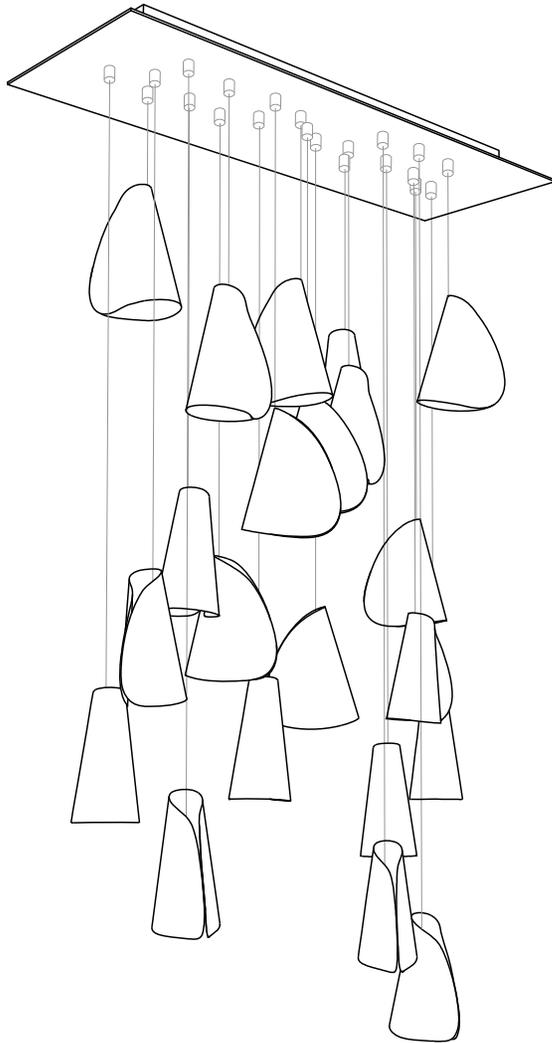

53  
(2')

up to  
3000  
(10')  
standard

up to  
30500  
(100')  
custom

±130 (5')



154  
(6')

284  
(11.2')

720 (28.3')

850 (33.5')

PENDANTS: twenty-one

MOUNTING: white powder coated rectangular canopy 850mm (33.5') x 284mm (11.2') x 53mm (2') deep

LAMPING: 1.5w LED or 20w xenon

COAX: fixed lengths. 3000mm (10') standard / up to 30500mm (100') maximum

MATERIALS: porcelain, borosilicate glass, braided metal coaxial cable, electrical components, white powder coated canopy

WEIGHT: approximately 18.6kg (41lb)

TRANSFORMERS: integral

## DESCRIPTION

21.21 is a random configuration of twenty-one 21 pendants hung from a rectangular canopy. The drop lengths of the pendants are randomized between a client specified range of heights to variously cluster and scatter. The result is an ambient installation or field of light.

Inspired by the sporadic, discordant arrangement of barnacles on a rock surface, the 21 is fabricated from thin sheets of porcelain wrapped around a trumpet shaped borosilicate diffuser. Each diffuser houses a low voltage lamp. A strong contrast is established between the organically distributed soft light passing through the white porcelain skin and the sharp, crisp light passing through the borosilicate glass diffuser.


RECTANGLE

# 21.21


Design by Omer Arbel  
PRODUCT SPECIFICATION

twentieth  
sales@twentieth.net 323-904-1200  
7470 Beverly Blvd, Los Angeles, CA 90036





154 (6")  
284 (11.2")

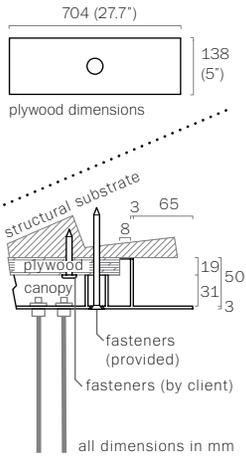

1

Measure and mark the light fixture canopy position on the ceiling

2

Note: The client is responsible for providing a robust 19mm (3/4") plywood backing or wood blocking to securely anchor to the structural substrate.

Connections from the plywood to the structural substrate are the client's responsibility.

Measure the plywood so that it fits within the canopy side walls (refer to detail above).

Anchor the plywood backing to the structural ceiling substrate.

3

Connect transformers inside the canopy to line voltage.

Xenon (110V) or LED: connect the black wire to black and white wire to white wire.


Xenon (230V): connect black wire to brown wire and white wire to blue wire.

For the ground connection, connect the green wire with yellow stripe to the bare copper wire or green wire in the junction box.

Note: As an option, Bocci recommends mounting transformers remotely in a close, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to ensure compliance with the code.

4

Anchor canopy into the plywood backing using the fasteners provided.

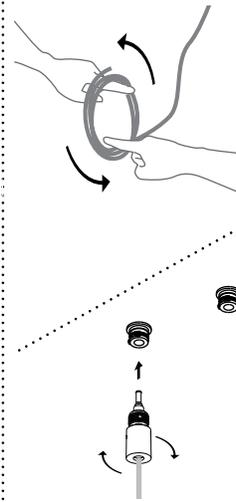

5

Very carefully uncoil the braided coaxial cable in a spool like manner. Insert your index fingers into opposite sides of the roll then rotate your fingers around each other to unroll the coaxial cable.

Use patience: allow the cable to uncoil completely to avoid kinks.

Each pendant terminates in a "headphone jack" type connector, which plugs into a receiving receptacle in the canopy. Clients are encouraged to compose their own pendant configuration on site, thus creating a truly unique fixture. After plugging in each pendant, turn the threaded sheath into place by hand ensuring that it is adequately tightened. Tools are not required.

6

Thread the coaxial cable through the shade, followed by the borosilicate diffuser and finally slide on the retainer.


Bocci 20w xenon bipin or 1.8w LED

Bocci 1.5w LED or 20w xenon lamps are included. Lamping is transformer specific. Plug the lamp into the socket. Do not touch the lamp with your bare hands.

7

Clean fingerprints from glass surfaces.

Turn fixture on.

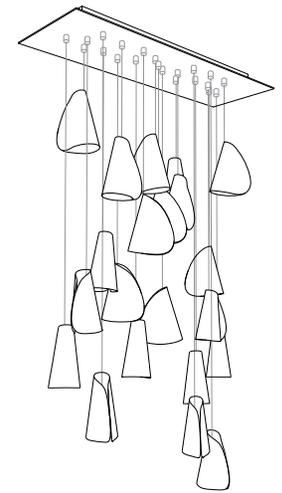

**BOCCI**

RECTANGLE

21.21

Design by Omer Arbel  
PRODUCT INSTALLATION INSTRUCTIONS

twentieth  
sales@twentieth.net 323-904-1200  
7470 Beverly Blvd, Los Angeles, CA 90036

