



CETO CIRCLET

CHANDELIER

Ceto Cirplet captures the variation and rippling of the surface of the ocean. Each piece is mouth blown, reflecting a distinct pattern that emits a delicate luminosity, evoking the presence of the sea and its undulating movements. The Ceto Cirplet collection features a circular band suspended in a horizontal plane, to which several Ceto lamps are affixed.

AVAILABLE FINISHES




TECHNICAL


MATERIAL	ANODISED ALUMINIUM, GLASS
LAMPING	SELV 60V (EXTERNAL DRIVER SUPPLIED) CC809 - 17W, 2700K CC1412 - 25W, 2700K CC2015 - 30W, 2700K WATTAGE AND LUMEN OUTPUT WILL VARY SLIGHTLY DEPENDING ON CONSTANT CURRENT OUTPUT.
LUMEN OUTPUT PER SHADE	CLEAR - 440LM WHITE - 430LM BLACK - 230LM FROSTED BLACK - 130LM
DIMMING OPTIONS	220-240V REGION PHASE - DIMMING RANGE 5 - 100% DALI - DIMMING RANGE 1 - 100% 110-120V REGION PHASE - DIMMING RANGE 3 - 100% DALI - DIMMING RANGE 0.1 - 100%
DRIVER SIZE 220 -240V	ALL US AND CANADIAN ORDERS COME SUPPLIED WITH 120V COMPONENTRY CERTIFIED FOR USE IN THESE REGIONS. FOR OPTIMAL DIMMING PERFORMANCE WE RECOMMEND SOURCING A DIMMER CAPABLE OF SETTING THE DIMMING RANGE OF THE FIXTURE.
110-120V	PHASE / TRIAC CC809 & CC1412 - L130 X W68 X H31 / L5.1" X W2.7" X H1.2" CC2015 - L140 X W40 X H23 / L5.5" X W1.6" X H0.9" DALI ALL CC - L97 X W43 X H30 / L3.8" X W1.7" X H1.2" PHASE / TRIAC ALL CC - L121 X W44 X H26.5 / L4.8" X W1.7" X H1" DALI ALL CC - L121 X W44 X H26.5 / L4.8" X W1.7" X H1"

LED LIFESPAN	50,000 HRS
IP RATING	IP20 - FOR INDOOR USE ONLY
CERTIFICATION	AU/NZ AS/NZS 60598.1, 60598.2.1 EU EN 60598.1, 60598.2.1 US/CAN ETL/UL 1598, CSA C22.2#250.0
CORD	3000 / 9'10" CLEAR COAXIAL CABLE
SUSPENSION	3 X 3000 / 9'10" Ø1.2MM STAINLESS STEEL WIRE *LONGER LENGTHS AVAILABLE UPON REQUEST
CANOPY	VARIOUS - SEE CANOPY OPTIONS ON FOLLOWING PAGE
SKU CODES	EG. CC809.G-BLK.A-BLK CETO 809 CIRCLET IN BLACK GLASS WITH BLACK ANODISED BODY CC809.G-XXX.A-XXX CETO 809 CIRCLET CC1412.G-XXX.A-XXX CETO 1412 CIRCLET CC2015.G-XXX.A-XXX CETO 2015 CIRCLET
FINISHES GLASS	FROSTED BLACK (G-FBK) BLACK (G-BLK) CLEAR (G-CLR) WHITE (G-WHT)
BODY	BLACK ANODISED (A-BLK) / CHAMPAGNE ANODISED (A-CHM)
DIMENSIONS	VARIOUS - SEE DIMENSIONS ON FOLLOWING PAGE*
PRODUCT WEIGHT	CC809 23KG / 51LB CC1412 32KG / 70LB CC2015 42KG / 93LB
PACKAGING DIMENSIONS	CC809 L 900 W 900 H 350 / L 2'11" W 2'11" H 1'2" CC1412 L 1000 W 750 H 350 / L 3'3" W 2'6" H 1'2" CC2015 L 1250 W 750 H 350 / L 4'1" W 2'6" H 1'2"
PACKAGING WEIGHT	CC809 27KG / 60LB CC1412 38KG / 84LB CC2015 50KG / 110LB

DIMENSIONS




CC809
Ø 980 H 200 RING Ø 800
Ø 3'3" H 7.9" RING Ø 2'75"
MIN DROP HEIGHT - H 600 / 2'

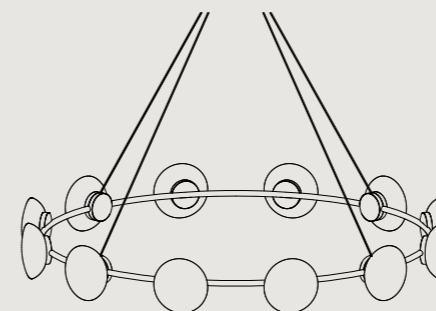

CC1412
Ø 1575 H 200 RING Ø 1400
Ø 5'2" H 7.9" RING Ø 4' 7"
MIN DROP HEIGHT - H 900 / 2'11"

MIN DROP HEIGHT CENTRAL CANOPY = H900 / 2'11"
MIN DROP HEIGHT INDIVIDUAL CANOPY = H600 / 2"

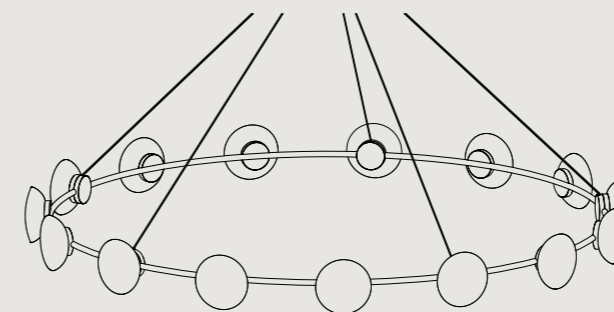

CC2015
Ø 2175 H 200 RING Ø 2000
Ø 7'2" H 7.9" RING Ø 6' 7"
MIN DROP HEIGHT - H 1200 / 3'11"

MIN DROP HEIGHT CENTRAL CANOPY = H1200 / 3'11"
MIN DROP HEIGHT INDIVIDUAL CANOPY = H600 / 2"

*HANG HEIGHT NEEDS TO BE CONFIRMED PRIOR TO PRODUCTION.
*POWER ACCESS POINT REQUIRED AT CENTRE OF CEILING CANOPY.

AVAILABLE CANOPIES

ALL ROSS GARDAM CEILING MOUNTED FIXTURES COME SUPPLIED WITH A CEILING CANOPY UNLESS OTHERWISE SPECIFIED. EACH CANOPY INCLUDES ELECTRICAL CONNECTORS, EARTH WIRE AND CABLE RETENTION TO CONNECT TO MAINS POWER. THE BELOW IMAGES DEPICT THE CEILING CANOPIES AVAILABLE WITH EACH FIXTURE TYPE. IF NO CANOPY IS SELECTED, THE STANDARD CANOPY (NON US/CAN REGION) OR LARGE CANOPY (US/CAN) WILL BE SUPPLIED.

CENTRAL CANOPY



CENTRAL
SUSPENSION + COAXIAL CANOPY
CAN.ST.CC809.X-XXX
Ø170 X 40MM / 6.7" X 1.6"
DRIVER HOUSED IN CANOPY



CENTRAL
SUSPENSION + COAXIAL CANOPY
CAN.ST.CC1412.X-XXX
Ø170 X 40MM / 6.7" X 1.6"
DRIVER HOUSED IN CANOPY



CENTRAL
SUSPENSION + COAXIAL CANOPY
CAN.ST.CC2015.X-XXX
Ø170 X 40MM / 6.7" X 1.6"
DRIVER HOUSED IN CANOPY

14MM TUBE (INDIVIDUAL CANOPY)



STANDARD
Ø14MM FIXED CANOPY
CAN.ST.120.F14.X-XXX
Ø120 X 30MM / 4.7" X 1.2"
DRIVER HOUSED IN CEILING



STANDARD
Ø14MM FIXED SWIVEL CANOPY
CAN.ST.120.F14.SW.X-XXX
Ø120 X 30MM / 4.7" X 1.2"
DRIVER HOUSED IN CEILING



LARGE
Ø14MM FIXED CANOPY
CAN.ST.170.F14.X-XXX
Ø170 X 40MM / 6.7" X 1.6"
DRIVER HOUSED IN CANOPY



LARGE
Ø14MM FIXED SWIVEL CANOPY
CAN.ST.170.F14.SW.X-XXX
Ø170 X 40MM / 6.7" X 1.6"
DRIVER HOUSED IN CANOPY



SLIM
Ø14MM FIXED CANOPY
CAN.SL.F14.X-XXX
Ø120 X 7MM / 4.7" X 0.3"
DRIVER HOUSED IN CEILING



SLIM
Ø14MM FIXED SWIVEL CANOPY
CAN.SL.F14.SW.X-XXX
Ø120 X 7MM / 4.7" X 0.3"
DRIVER HOUSED IN CEILING



PUCK
Ø14MM FIXED CANOPY
CAN.PK.F14.X-XXX
Ø50 X 65MM / 2" X 2.6"
DRIVER HOUSED IN CEILING
*US/CAN ORDERS TO BE
INSTALLED WITH SUPPLIED
JUNCTION BOX RENDER
MOUNTING PLATE



PUCK
Ø14MM FIXED SWIVEL CANOPY
CAN.PK.F14.SW.X-XXX
Ø50 X 65MM / 2" X 2.6"
DRIVER HOUSED IN CEILING
*US/CAN ORDERS TO BE
INSTALLED WITH SUPPLIED
JUNCTION BOX RENDER
MOUNTING PLATE

VERTICAL CABLE (INDIVIDUAL CANOPY)



STANDARD
SUSPENSION + COAXIAL CANOPY
CAN.ST.120.CX.X-XXX
Ø120 X 30MM / 4.7" X 1.2"
DRIVER HOUSED IN CEILING



LARGE
SUSPENSION + COAXIAL CANOPY
CAN.ST.170.CX.X-XXX
Ø170 X 40MM / 6.7" X 1.6"
DRIVER HOUSED IN CANOPY



SLIM
SUSPENSION + COAXIAL CANOPY
CAN.SL.CX.X-XXX
Ø120 X 7MM / 4.7" X 0.3"
DRIVER HOUSED IN CEILING




PUCK
SUSPENSION + COAXIAL CANOPY
CAN.PK.CX.X-XXX
Ø50 X 65MM / 2" X 2.6"
DRIVER HOUSED IN CEILING
*US/CAN ORDERS TO BE
INSTALLED WITH SUPPLIED
JUNCTION BOX RENDER
MOUNTING PLATE

TECHNICAL

MATERIAL

ANODISED ALUMINIUM



CANOPY FINISH

ANODISED BLACK (A-BLK)
ANODISED CHAMPAGNE (A-CHM)

SKU CODES

EG. CAN.ST.CC809.A-CHM =
STANDARD 809 SUSPENSION
+ COAXIAL CANOPY IN CHAMPAGNE ANODISED FINISH