



CETO

WALL LIGHT - OFFSET

Ceto captures the variation and rippling of the surface of the ocean. Each piece reflects a unique pattern, emitting a delicate luminosity, highlighting the presence of the sea. This sculptural luminaire is available in a selection of mouth-blown glass finishes combined with a highly refined machined aluminium body available in a black and champagne anodised finish. The Ceto Wall Light reflects the shadows of the glass against the wall, replicating the natural flow and movement of water.

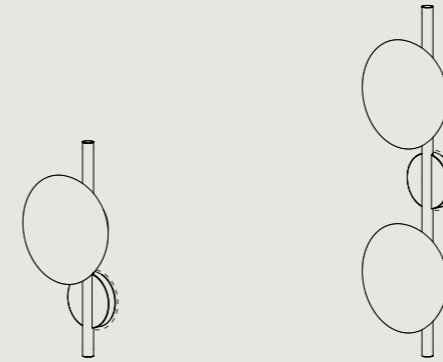
AVAILABLE FINISHES

FROSTED BLACK
GLASSBLACK
GLASSCLEAR
GLASSWHITE
GLASSBLACK
ANODISEDCHAMPAGNE
ANODISED

TECHNICAL

MATERIAL	ANODISED ALUMINIUM, GLASS	CERTIFICATION	AU/NZ EU US/CAN	AS/NZS 60598.1, 60598.2.1 EN 60598.1, 60598.2.1 ETL/UL 1598, CSA C22.2#250.0
LAMPING	SELV 60V (WITH EXTERNAL DRIVER) CWL1 - 3.7W, 2700K CWL2 - 5.6W, 2700K	MOUNTING	WALL MOUNT BODY Ø100MM / 3.9"	
	LUMEN OUTPUT PER SHADE CLEAR - 440LM BLACK - 230LM		US / CAN MOUNTING OPTION 1 - JUNCTION BOX COVER PLATE FITS STANDARD 4" OCTAGONAL JUNCTION BOXES. INCLUDES COVER PLATE (Ø4.7") AND A MOUNTING PLATE.	
	WHITE - 430LM FROSTED BLACK - 130LM		OPTION 2 - JUNCTION BOX RENDER PLATE RENDER PLATE MOUNTED DIRECTLY TO JUNCTION BOX AND PATCHED AND PAINTED OVER.	
DIMMING OPTIONS	220-240V REGION PHASE - DIMMING RANGE 5 - 100% DALI - DIMMING RANGE 1 - 100%		EITHER OPTION SUPPLIED ONLY FOR US/CANADA ONLY. CONTACT STUDIO FOR FURTHER DETAILS.	
	110-120V REGION PHASE - DIMMING RANGE 3 - 100% DALI - DIMMING RANGE 0.1 - 100%	SKU CODES	EG. CWL1.G-BLK.A-BLK = CETO WALL LIGHT WITH OFFSET MOUNT IN BLACK GLASS WITH A BLACK ANODISED FRAME	
	ALL US AND CANADIAN ORDERS COME SUPPLIED WITH 120V COMPONENTRY CERTIFIED FOR USE IN THESE REGIONS.		CWL1.G-XXX.A-XXX CETO SINGLE WALL LIGHT WITH OFFSET MOUNT CWL2.G-XXX.A-XXX CETO DOUBLE WALL LIGHT WITH OFFSET MOUNT	
	FOR OPTIMAL DIMMING PERFORMANCE WE RECOMMEND SOURCING A DIMMER CAPABLE OF SETTING THE DIMMING RANGE OF THE FIXTURE.	FINISHES GLASS	FROSTED BLACK (G-FBK) CLEAR (G-CLR)	BLACK (G-BLK) WHITE (G-WHT)
DRIVER SIZE 220 -240V	PHASE / TRIAC CWL1 & CWL2 - L101 X W51 X H29 / L4" X W2" X H1.1"	BODY	BLACK ANODISED (A-BLK) / CHAMPAGNE ANODISED (A-CHM)	
	DALI CWL1 & CWL2 - L144 X W30 X H21 / L5.7" X W1.2" X H0.8"	DIMENSIONS	VARIOUS - SEE DIMENSIONS ON FOLLOWING PAGE*	
110-120V	PHASE / TRIAC CWL1 & CWL2 - L75 X W35 X H26.5 / L3" X W1.4" X H1"	PRODUCT WEIGHT	CWL1 - 2KG / 4.4LB CWL2 - 4KG / 9LB	
	DALI CWL1 & CWL2 - L75 X W35 X H26.5 / L3" X W1.4" X H1"	PACKAGING DIMENSIONS	CWL1 - L 580 W 350H 250 / L 20" W 20" H 9.8" CWL2 - L 500 W 500 H 250 / L 20" W 20" H 9.8"	
LED LIFESPAN	50,000 HRS	PACKAGING WEIGHT	CWL1 - 2KG / 4.4LB CWL2 - 4KG / 9LB	
IP RATING	IP20 - FOR INDOOR USE ONLY			

DIMENSIONS

CWL1
W 200 H 400 D 107
W 7.9" H 15.8" D 4.2"*DOTTED LINE REPRESENTS
OPTIONAL US/CAN JUNCTION
BOX COVER PLATECWL2
W 200 H 650 D 107
W 7.9" H 25.6" D 4.2"*DOTTED LINE REPRESENTS
OPTIONAL US/CAN JUNCTION
BOX COVER PLATE