



VOLANT 55 & 66

CHANDELIER

Volant is a modern chandelier that’s almost akin to a kinetic sculpture. A static lamp with a mystifying ability to appear in motion. Solid brass bars are home to textured, tubular formed glass elements, angled to give the impression of floating objects revolving around each other. The result is an elegant equilibrium that’s at once enthralling yet soothing.



AVAILABLE FINISHES



TECHNICAL

MATERIAL	TREATED BRASS, GLASS			LED LIFESPAN	50,000 HRS		
FINISH	ALL BRASS FRAMES ARE BRUSHED AND TREATED TO ACHIEVE THE AVAILABLE FINISH OPTIONS, THEN SEALED TO PREVENT ACCELERATED AGING.			IP RATING	IP20 - FOR INDOOR USE ONLY		
				CERTIFICATION	AU/NZ	AS/NZS 60598.1, 60598.2.1	
LAMPING	SELV 60V (EXTERNAL DRIVER SUPPLIED) VC555 - 22W, 3050-3550 LM, 2700K VC666 - 26.4W, 3660-4020 LM, 2700K WATTAGE AND LUMEN OUTPUT WILL VARY SLIGHTLY DEPENDING ON CONSTANT CURRENT OUTPUT.			EU	EN 60598.1, 60598.2.1		
				US/CAN	ETL/UL 1598, CSA C22.2#250.0		
				CANOPY	VARIOUS - SEE CANOPY OPTIONS ON FOLLOWING PAGE		
				SKU CODES	EG. VC666.G-CFL.BR-BRZ VOLANT 666 CHANDELIER IN CLEAR FLUTED GLASS WITH A BRUSHED BRONZED BRASS FRAME		
				LUMEN OUTPUT PER SHADE			VC555.G-XXX.BR-XXX
DIMMING OPTIONS	CLEAR FLUTED - 650LM			FROSTED FLUTED - 450LM			
	FROSTED BLACK - 150LM			FROSTED WHITE - 400LM			
	220-240V REGION			VC666.G-XXX.BR-XXX			
	PHASE	- DIMMING RANGE 5 - 100%		FINISHES	FROSTED BLACK (G-FBL) CLEAR FLUTED (G-CFL) FROSTED FLUTED (G-FFL) FROSTED WHITE (G-FWH)		
	DALI	- DIMMING RANGE 1 - 100%					
	110-120V REGION			FRAME	BRUSHED BRASS (BR-NAT) BRUSHED BLACKENED BRASS (BR-BLK) BRUSHED BRONZED BRASS (BR-BRZ)		
	PHASE	- DIMMING RANGE 3 - 100%					
	DALI	- DIMMING RANGE 0.1 - 100%					
	ALL US AND CANADIAN ORDERS COME SUPPLIED WITH 120V COMPONENTRY CERTIFIED FOR USE IN THESE REGIONS.						
	DRIVER SIZE	FOR OPTIMAL DIMMING PERFORMANCE WE RECOMMEND SOURCING A DIMMER CAPABLE OF SETTING THE DIMMING RANGE OF THE FIXTURE.			PRODUCT WEIGHT	VC555	35KG / 77LB
				VC666	42KG / 93LB		
			PACKAGING DIMENSIONS	VC555	3 X L 1920 W 370 H 190 / L 75.6" W 14.6" H 11.1"		
PHASE					VC666	1 X L 500 W 500 H 250 / L 19.7" W 19.7" H 10.1"	
ALL VC 55 & 66		- L101 X W51 X H29 / L4" X W2" X H1.1"				3 X L 1920 W 370 H 190 / L 75.6" W 14.6" H 11.1"	
110-120V	DALI			PACKAGING WEIGHT	VC555	2 X 16KG / 35LB, 1 X 9KG / 20LB, 1 X 3KG / 6.6LB	
	ALL VC 55 & 66	- L120 X W51 X H29 / L4.7" X W2" / X H1.1"			VC666	3 X 16.5KG / 36.5LB, 1 X 3KG / 6.6LB	
	PHASE						
	ALL VC 55 & 66	- L75 X W35 X H26.5 / L3" X W1.4" X H1"					
	DALI						
	ALL VC 55 & 66	- L75 X W35 X H26.5 / L3" X W1.4" X H1"					

DIMENSIONS

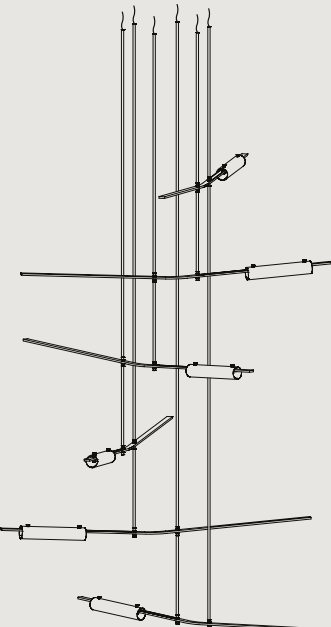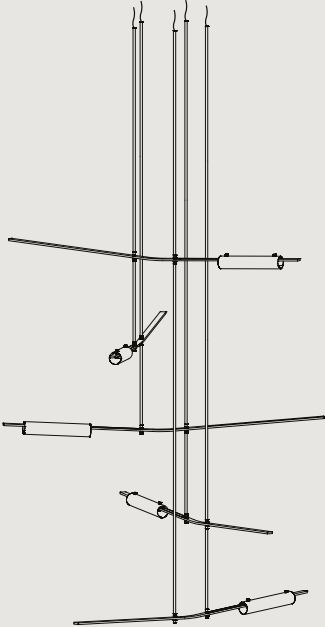

VC555
L 1790 W 1720 H 2090
L 70.5" W 67.7" H 82.3"
MIN DROP HEIGHT - H 2590 / 102"

VC666
L 1790 W 1790 H 2580
L 70.5" W 70.5" H 101.6"
MIN DROP HEIGHT - H 3080 / 121.3"

*HANG HEIGHT NEEDS TO BE CONFIRMED PRIOR TO PRODUCTION, TOLERANCE IS +/- 25MM
*POWER ACCESS POINT REQUIRED AT CENTRE OF CEILING CANOPY.

AVAILABLE CANOPIES

ALL ROSS GARDAM CEILING MOUNTED FIXTURES COME SUPPLIED WITH A CEILING CANOPY UNLESS OTHERWISE SPECIFIED. EACH CANOPY INCLUDES ELECTRICAL CONNECTORS, EARTH WIRE AND CABLE RETENTION TO CONNECT TO MAINS POWER. THE BELOW IMAGES DEPICT THE CEILING CANOPIES AVAILABLE WITH EACH FIXTURE TYPE. IF NO CANOPY IS SELECTED THE CIRCULAR CANOPY WILL BE SUPPLIED.

CIRCULAR



CIRCULAR
FIXED CANOPY
CAN.VC.CIR.X-XXX

Ø600 X 37MM / 23.6" X 1.5"

DRIVER HOUSED IN CANOPY



CIRCULAR
FIXED SWIVEL CANOPY
CAN.VC.CIR.SW.X-XXX

Ø600 X 37MM / 23.6" X 1.5"

DRIVER HOUSED IN CANOPY

INDIVIDUAL CANOPY



SLIM
Ø14MM FIXED CANOPY
CAN.SL.F14.X-XXX

Ø120 X 7MM / 4.7" X 0.3"

DRIVER HOUSED IN CEILING



SLIM
Ø14MM FIXED SWIVEL CANOPY
CAN.SL.F14.SW.X-XXX

Ø120 X 7MM / 4.7" X 0.3"

DRIVER HOUSED IN CEILING



PUCK
Ø14MM FIXED CANOPY
CAN.PK.F14.X-XXX

Ø50 X 65MM / 2" X 2.6"

DRIVER HOUSED IN CEILING
*US/CAN ORDERS TO BE
INSTALLED WITH SUPPLIED
JUNCTION BOX RENDER
MOUNTING PLATE



PUCK
Ø14MM FIXED SWIVEL CANOPY
CAN.PK.F14.SW.X-XXX

Ø50 X 65MM / 2" X 2.6"

DRIVER HOUSED IN CEILING
*US/CAN ORDERS TO BE
INSTALLED WITH SUPPLIED
JUNCTION BOX RENDER
MOUNTING PLATE

TECHNICAL

MATERIAL	TREATED BRASS / POWDER COATED STEEL
	 BRUSHED BRASS  BRUSHED BLACKENED BRASS  BRUSHED BRONZED BRASS  WHITE POWDERCOATED
CANOPY FINISH	BRUSHED BRASS (BR-NAT) BRUSHED BLACKENED BRASS (BR-BLK) BRUSHED BRONZED BRASS (BR-BRZ) POWDERCOATED WHITE (C-WHT) (CIRCULAR CANOPIES ONLY)
SKU CODES	EG. CAN.VC.CIR.SW.BR-NAT = CIRCULAR FIXED SWIVEL CANOPY IN BRUSHED BRASS FINISH