



## SOLACE

CHAIN PENDANT


Solace Chain extends the language of the Solace Pendant through a delicate suspension. A fine chain introduces movement and subtle weight, allowing the geometric glass form to settle into a gentle, natural drape. The result is a composition that feels precise and fluid, balancing structure with softness.

Available in single, single looped, and double looped configurations, each piece can be composed in multiple combinations to form both restrained and larger, more expansive statements.

### AVAILABLE FINISHES



### DIMENSIONS



SOP-C1  
L 195 W 195 H 370  
L 7.7" W 7.7" H 14.6"  
MIN DROP HEIGHT - H 920 / 36.2"


### TECHNICAL

MATERIAL	TREATED BRASS, GLASS
FINISH	ALL BRASS COMPONENTRY IS BRUSHED AND TREATED TO ACHIEVE THE AVAILABLE FINISH OPTIONS, THEN SEALED TO PREVENT ACCELERATED AGING.
LAMPING	SELV 60V (EXTERNAL DRIVER SUPPLIED) 8W, 2700K
	LUMEN OUTPUT BASED ON FINISH WHITE - 700LM FROSTED CLEAR - 700LM FROSTED BLACK - 500LM BLACK - 900LM
DIMMING	220-240V REGION PHASE DIMMING RANGE 5 - 100% DALI DIMMING RANGE 1 - 100%
	110-120V REGION PHASE DIMMING RANGE 3 - 100% DALI DIMMING RANGE 0.1 - 100%
	ALL US AND CANADIAN ORDERS COME SUPPLIED WITH 120V COMPONENTRY CERTIFIED FOR USE IN THESE REGIONS.
	FOR OPTIMAL DIMMING PERFORMANCE WE RECOMMEND SOURCING A DIMMER CAPABLE OF SETTING THE DIMMING RANGE OF THE FIXTURE.
LED LIFESPAN	50,000 HRS
IP RATING	IP20 - FOR INDOOR USE ONLY
CERTIFICATION	AU/NZ AS/NZS 60598.1, 60598.2.1 EU EN 60598.1, 60598.2.1 US/CAN PENDING CERTIFICATION
CANOPY	VARIOUS - SEE CANOPY OPTIONS ON FOLLOWING PAGE

DRIVER SIZE	220 -240V PHASE L101 X W51 X H29 / L4" X W2" X H1.1" 220-240V DALI L145 X W30 X H21 / L5.7" X W1.2" / X H0.9" 110-120V PHASE *L75 X W35 X H26.5 / L3" X W1.4" X H1" 110-120V DALI *L75 X W35 X H26.5 / L3" X W1.4" X H1"
	*DRIVER CAN BE HOUSED WITHIN STANDARD 4" OCTAGONAL JUNCTION BOX.
SKU CODES	EG. SOP-C1L1.G-FCL.BR-BLK SOLACE SINGLE CHAIN - LOOPED IN FROSTED CLEAR GLASS WITH A BRUSHED BLACKENED BRASS BODY
	SOP-C1.G-XXX.BR-XXX SOP-C1L1.G-XXX.BR-XXX SOP-C2L1.G-XXX.BR-XXX
GLASS	FROSTED BLACK (G-FBL) FROSTED CLEAR (G-FCL) WHITE (G-WHT) BLACK (G-BLK)
BODY	BRUSHED BRASS (BR-NAT) BRUSHED BLACKENED BRASS (BR-BLK) BRUSHED BRONZED BRASS (BR-BRZ)
PRODUCT WEIGHT	SOP-C1 6KG / 13.2LB SOP-C1L1 6KG / 13.2LB SOP-C2L1 12KG / 26.4LB
PACKAGE WEIGHT	SOP-C1 7KG / 15.5LB SOP-C1L1 7KG / 15.5LB SOP-C2L1 14KG / 31LB
PACKAGE SIZE	SOP-C1 L 360 W 360 H 550 / L 26" W 26" H 34" SOP-C1L1 L 360 W 360 H 550 / L 26" W 26" H 34" SOP-C2L1 2X - L 360 W 360 H 550 / L 26" W 26" H 34"



SOP-C1L1  
L 195 W 195 H 370  
L 7.7" W 7.7" H 14.6"  
MIN DROP HEIGHT - H 920 / 36.2"

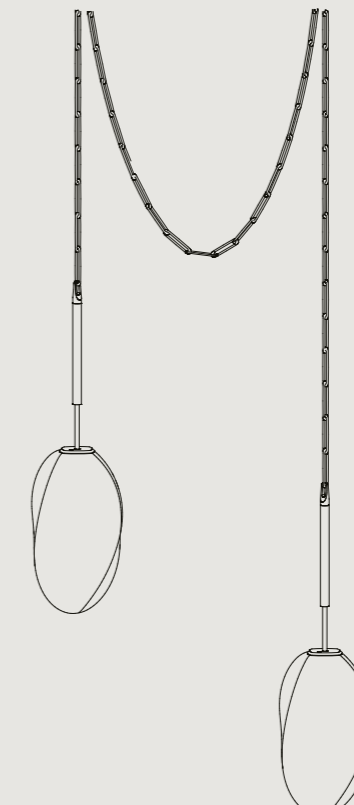

SOP-C2L1  
L 195 W 195 H 370  
L 7.7" W 7.7" H 14.6"  
MIN DROP HEIGHT - H 920 / 36.2"