



SOLACE

CHAIN PENDANT

Solace Chain extends the language of the Solace Pendant through a delicate suspension. A fine chain introduces movement and subtle weight, allowing the geometric glass form to settle into a gentle, natural drape. The result is a composition that feels precise and fluid, balancing structure with softness.

Available in single, single looped, and double looped configurations, each piece can be composed in multiple combinations to form both restrained and larger, more expansive statements.

AVAILABLE FINISHES



TECHNICAL

|               |                                                                                                                                                                                                                                                                                                                                                                            |  |                |                                                                                                                                                                                                                                          |  |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| MATERIAL      | TREATED BRASS, GLASS                                                                                                                                                                                                                                                                                                                                                       |  | DRIVER SIZE    | 220 -240V PHASE - L101 X W51 X H29 / L4" X W2" X H1.1"<br>220-240V DALI - L145 X W30 X H21 / L5.7" X W1.2"/ X H0.9"<br>110-120V PHASE - *L75 X W35 X H26.5 / L3" X W1.4" X H1"<br>110-120V DALI - *L75 X W35 X H26.5 / L3" X W1.4" X H1" |  |
| FINISH        | ALL BRASS COMPONENTRY IS BRUSHED AND TREATED TO ACHIEVE THE AVAILABLE FINISH OPTIONS, THEN SEALED TO PREVENT ACCELERATED AGING.                                                                                                                                                                                                                                            |  |                | *DRIVER CAN BE HOUSED WITHIN STANDARD 4" OCTAGONAL JUNCTION BOX.                                                                                                                                                                         |  |
| LAMPING       | FIXED TEMP - 2700K<br>8W, SELV 60V (EXTERNAL DRIVER SUPPLIED)<br><br>DIM TO WARM - 1800-3000K<br>10W, SELV 60V (EXTERNAL DRIVER SUPPLIED)                                                                                                                                                                                                                                  |  | SKU CODES      | EG. SOP-C1L1.G-FCL.BR-BLK<br>SOLACE SINGLE CHAIN - LOOPED IN FROSTED CLEAR GLASS WITH A BRUSHED BLACKENED BRASS BODY                                                                                                                     |  |
|               | LUMEN OUTPUT BASED ON FINISH<br>WHITE - 700LM                      FROSTED CLEAR - 700LM<br>FROSTED BLACK - 500LM        BLACK - 900LM                                                                                                                                                                                                                                     |  |                | SOP-C1.G-XXX.BR-XXX<br>SOP-C1L1.G-XXX.BR-XXX<br>SOP-C2L1.G-XXX.BR-XXX                                                                                                                                                                    |  |
| DIMMING       | 220-240V REGION<br>PHASE                      DIMMING RANGE 5 - 100%<br>DALI                         DIMMING RANGE 1 - 100%<br><br>110-120V REGION<br>PHASE                      DIMMING RANGE 3 - 100%<br>DALI                         DIMMING RANGE 0.1 - 100%<br><br>ALL US AND CANADIAN ORDERS COME SUPPLIED WITH 120V COMPONENTRY CERTIFIED FOR USE IN THESE REGIONS. |  |                | GLASS<br>FROSTED BLACK (G-FBL)<br>FROSTED CLEAR (G-FCL)<br>WHITE (G-WHT)<br>BLACK (G-BLK)<br><br>BODY<br>BRUSHED BRASS (BR-NAT)<br>BRUSHED BLACKENED BRASS (BR-BLK)<br>BRUSHED BRONZED BRASS (BR-BRZ)                                    |  |
|               | FOR OPTIMAL DIMMING PERFORMANCE WE RECOMMEND SOURCING A DIMMER CAPABLE OF SETTING THE DIMMING RANGE OF THE FIXTURE.                                                                                                                                                                                                                                                        |  | PRODUCT WEIGHT | SOP-C1                      6KG / 13.2LB<br>SOP-C1L1                   6KG / 13.2LB<br>SOP-C2L1                   12KG / 26.4LB                                                                                                          |  |
| LED LIFESPAN  | 50,000 HRS                                                                                                                                                                                                                                                                                                                                                                 |  | PACKAGE WEIGHT | SOP-C1                      7KG / 15.5LB<br>SOP-C1L1                   7KG / 15.5LB<br>SOP-C2L1                   14KG / 31LB                                                                                                            |  |
| IP RATING     | IP20 - FOR INDOOR USE ONLY                                                                                                                                                                                                                                                                                                                                                 |  |                |                                                                                                                                                                                                                                          |  |
| CERTIFICATION | AU/NZ                      AS/NZS 60598.1, 60598.2.1<br>EU                         EN 60598.1, 60598.2.1<br>US/CAN                   PENDING CERTIFICATION                                                                                                                                                                                                                 |  | PACKAGE SIZE   | SOP-C1                      L 360 W 360 H 550 / L 26" W 26" H 34"<br>SOP-C1L1                   L 360 W 360 H 550 / L 26" W 26" H 34"<br>SOP-C2L1                   2X - L 360 W 360 H 550 / L 26" W 26" H 34"                           |  |
| CANOPY        | VARIOUS - SEE CANOPY OPTIONS ON FOLLOWING PAGE                                                                                                                                                                                                                                                                                                                             |  |                |                                                                                                                                                                                                                                          |  |


DIMENSIONS



SOP-C1  
L 195 W 195 H 370  
L 7.7" W 7.7" H 14.6"  
MIN DROP HEIGHT - H 920 / 36.2"



SOP-C1L1  
L 195 W 195 H 370  
L 7.7" W 7.7" H 14.6"  
MIN DROP HEIGHT - H 920 / 36.2"

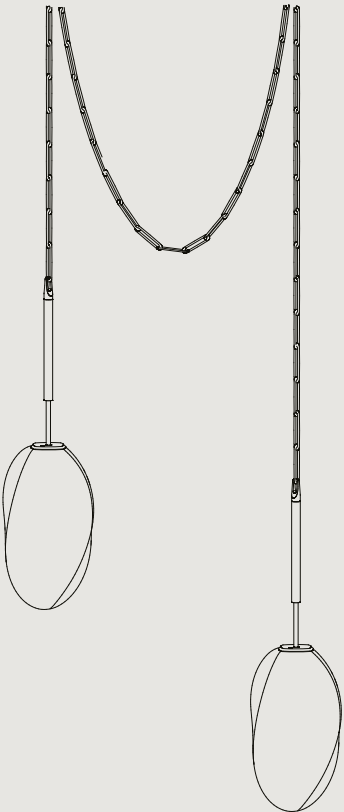

SOP-C2L1  
L 195 W 195 H 370  
L 7.7" W 7.7" H 14.6"  
MIN DROP HEIGHT - H 920 / 36.2"

TECHNICAL

|               |                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MATERIAL      | TREATED BRASS                                                                                                                                                                                                                                                                                                                                                                               |
|               | <div><div><br/>BRUSHED<br/>BRASS</div><div><br/>BRUSHED<br/>BLACKENED<br/>BRASS</div><div><br/>BRUSHED<br/>BRONZED<br/>BRASS</div></div> |
| CANOPY FINISH | BRUSHED BRASS (BR-NAT)<br>BRUSHED BLACKENED BRASS (BR-BLK)<br>BRUSHED BRONZED BRASS (BR-BRZ)                                                                                                                                                                                                                                                                                                |
| SKU CODES     | EG. CAN.SL.CH.BR-BLK =<br>SLIM CHAIN CANOPY IN BRUSHED<br>BLACKENED BRASS FINISH                                                                                                                                                                                                                                                                                                            |

AVAILABLE CANOPIES

ALL ROSS GARDAM CEILING MOUNTED FIXTURES COME SUPPLIED WITH A CEILING CANOPY UNLESS OTHERWISE SPECIFIED. EACH CANOPY INCLUDES ELECTRICAL CONNECTORS, EARTH WIRE AND CABLE RETENTION TO CONNECT TO MAINS POWER. THE BELOW IMAGES DEPICT THE CEILING CANOPIES AVAILABLE WITH EACH FIXTURE TYPE. IF NO CANOPY IS SELECTED, THE SLIM CANOPY WILL BE SUPPLIED (OR LARGE FOR US/CAN REGIONS). CANOPY FINISH TO MATCH BODY, UNLESS OTHERWISE SPECIFIED.



SLIM  
CHAIN CANOPY  
CAN.SL.CH.XX-XXX  
  
Ø120 X 7MM / 4.7" X 0.3"  
  
DRIVER HOUSED IN CEILING



PUCK\*  
CHAIN CANOPY  
CAN.PK.CH.XX-XXX  
  
Ø50 X 65MM / 2" X 2.6"  
  
DRIVER HOUSED IN CEILING  
\*US/CAN ORDERS TO BE  
INSTALLED WITH SUPPLIED  
JUNCTION BOX RENDER  
MOUNTING PLATE



LARGE  
CHAIN CANOPY  
CAN.ST.170.CH.XX-XXX  
  
Ø170 X 40MM / 6.7" X 1.6"  
  
DRIVER HOUSED IN CANOPY

\*HANG HEIGHT NEEDS TO BE CONFIRMED PRIOR TO PRODUCTION, TOLERANCE IS +/- 40MM  
\*POWER ACCESS POINT REQUIRED AT CENTRE OF CEILING CANOPY.  
\*CEILING CANOPY SPACING FOR SINGLE LOOPED AND DOUBLE LOOPED PENDANTS DETERMINED BY OVERALL DROP HEIGHT. CONTACT STUDIO FOR MORE INFORMATION.