

Pole

05 - Surface to Surface - 3 Sections - 120V

Series
Pole

Materials
Aluminum, stainless steel, silicone

120V Illumination
Integrated LED

Product
05 - Surface to Surface - 3 Sections - 120V

Metal Finishes
Black

Wattage: 8 Watts
 Lumens: 300 Lumens est.
 Color Temperature: 2700K
 CRI: 90+
 LED Lifetime: 70,000 Hours est.
 Dimming: Triac, ELV or 0-10V

Dimensions

	A	B
Min.	85in / 216cm	87in / 221cm
Preferred	87in / 221cm	85in / 216cm
Max.	89in / 226cm	83in / 211cm

Large Mount - Powered
 L 5.1in/13cm x W 5.1in/13cm x
 H 0.4in/1cm cylindrical plate in matching
 metal finish


Driver location
 Driver located in the J-Box

Weight
5lb/2.3kg

Small Mount - Non powered
 L 1.8in/4.5cm x W 1.8in/4.5cm x
 H 0.3in/.7cm cylindrical plate in
 matching metal finish

Fixture Mounting
 Designed to be mounted on standard
 4in. Electrical Box.
 Two #8-32 screws included.

Certifications
UL, cUL (120V)

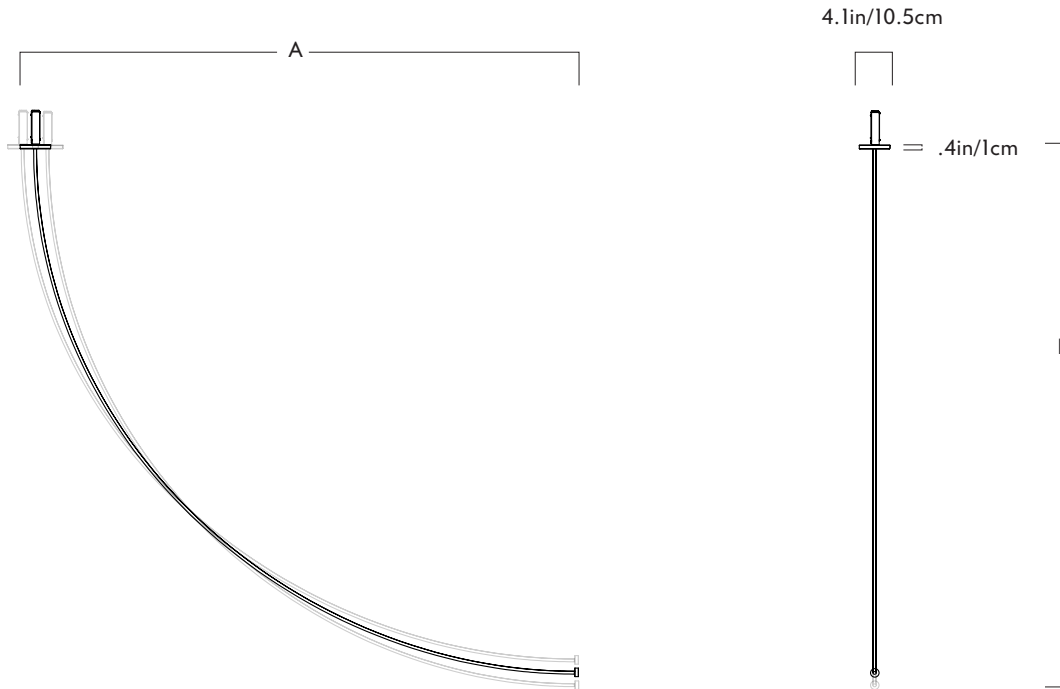

Pole

05 - Surface to Surface - 3 Sections - 240V

Series
Pole

Product
05 - Surface to Surface - 4 Sections - 240V

<u>Dimensions</u>	A	B
Min.	85in / 216cm	87in / 221cm
Preferred	87in / 221cm	85in / 216cm
Max.	89in / 226cm	83in / 211cm

Weight
6.9lb/3.1kg

Materials
Aluminum, stainless steel, silicone

Metal Finishes
Black

Large Mount - Powered
L 4.1in/10.5cm x W 4.1in/10.5cm x
H 0.4in/1cm cylindrical plate in matching metal finish.

Small Mount - Non powered
L 1.8in/4.5cm x W 1.8in/4.5cm x
H 0.3in/.7cm cylindrical plate in matching metal finish


Driver Box (240V Only)
240V version includes box to house drivers. Dimensions are L 1.2in/3cm x W 2.9in/7.5cm x H 4.5in/11.5cm

Certification
CE (240V)

240V Illumination
Integrated LED
Wattage: 8 Watts
Lumens: 300 Lumens est.
Color Temperature: 2700K
CRI: 90+
LED Lifetime: 70,000 Hours est.
Dimming: ELV or 0-10V

Driver location
Driver located in the Driver Box.

Fixture Mounting
Designed to be mounted on standard 4in. Electrical Box.
Two #8-32 screws included.
Additional mounting hardware provided for 240V versions.

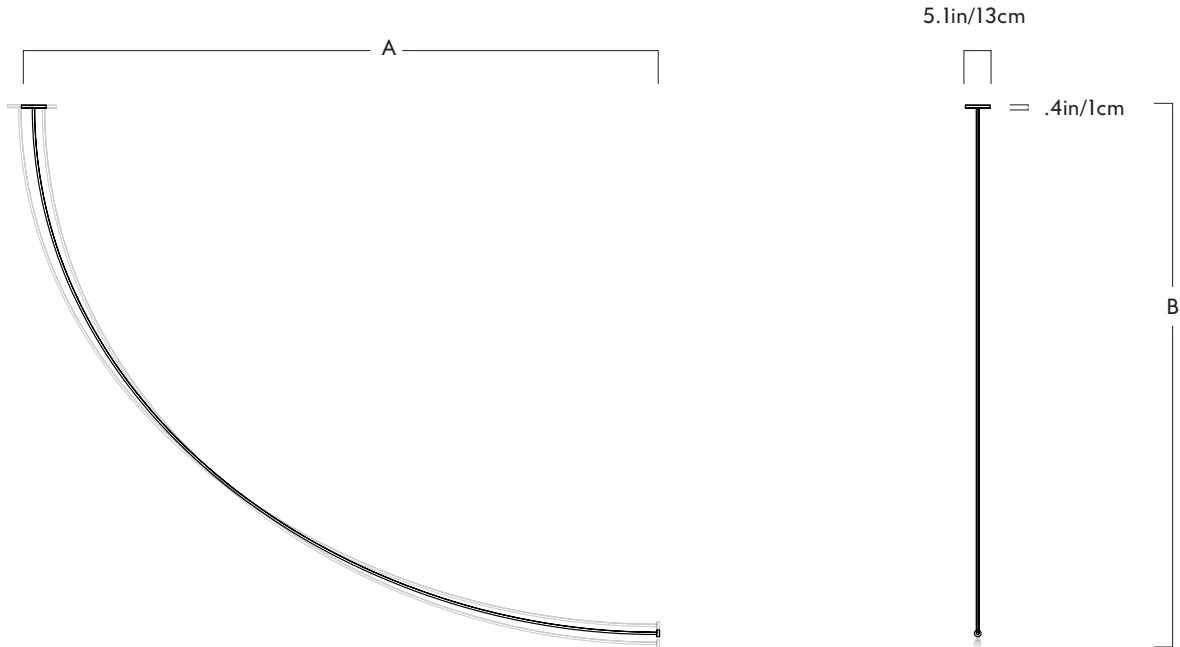

Pole

05 - Surface to Surface - 4 Sections - 120V

Series

Pole

Product
 05 - Surface to Surface - 4 Sections - 120V

Dimensions	A	B
Min.	122in / 310cm	107in / 272cm
Preferred	124in / 315cm	105in / 267cm
Max.	126in / 320cm	103in / 262cm

Weight
 5lb/2.3kg

Materials
 Aluminum, stainless steel, silicone

Metal Finishes
 Black

Large Mount - Powered
 L 5.1in/13cm x W 5.1in/13cm x
 H 0.4in/1cm cylindrical plate in matching
 metal finish


Small Mount - Non powered
 L 1.8in/4.5cm x W 1.8in/4.5cm x
 H 0.3in/.7cm cylindrical plate in
 matching metal finish

Certifications
 UL, cUL (120V)

120V Illumination
 Integrated LED
 Wattage: 10 Watts
 Lumens: 400 Lumens est.
 Color Temperature: 2700K
 CRI: 90+
 LED Lifetime: 70,000 Hours est.
 Dimming: Triac, ELV or 0-10V

Driver location
 Driver located in the J-Box

Fixture Mounting
 Designed to be mounted on standard
 4in. Electrical Box.
 Two #8-32 screws included.

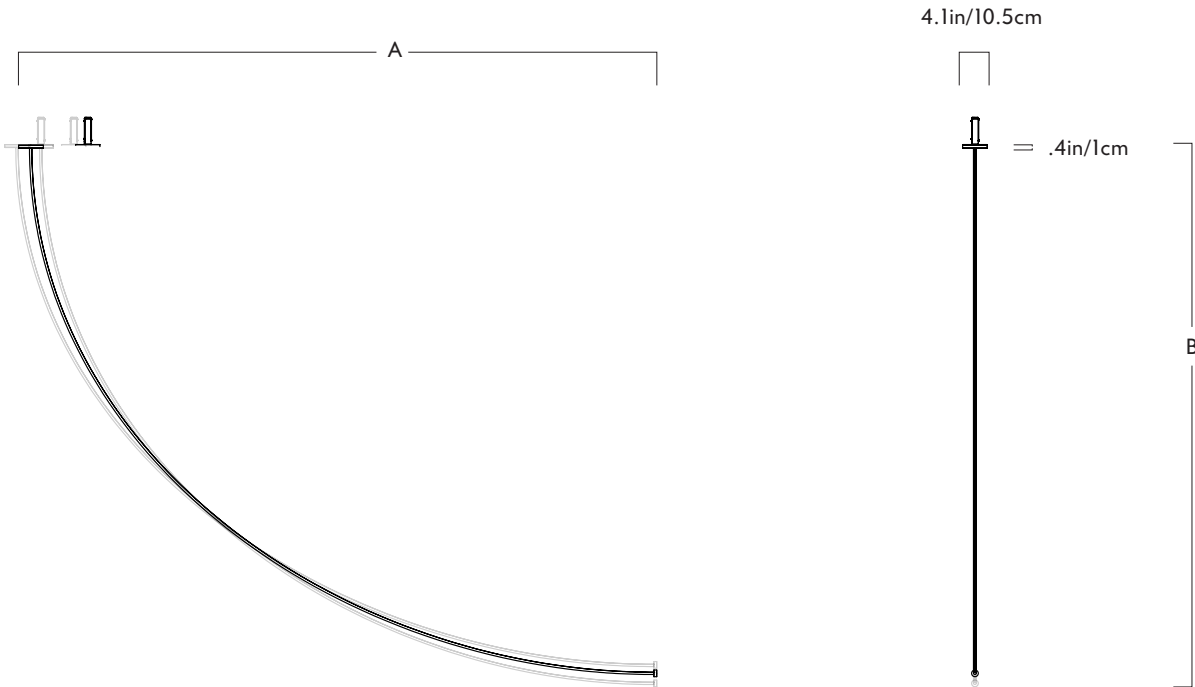

Pole

05 - Surface to Surface - 4 Sections - 240V

Series
Pole

Product
05 - Surface to Surface - 4 Sections - 240V

<u>Dimensions</u>	A	B
Min.	122in / 310cm	107in / 272cm
Preferred	124in / 315cm	105in / 267cm
Max.	126in / 320cm	103in / 262cm

Weight
6.9lb/3.1kg

Materials
Aluminum, stainless steel, silicone

Metal Finishes
Black

Large Mount - Powered
L 4.1in/10.5cm x W 4.1in/10.5cm x
H 0.4in/1cm cylindrical plate in matching metal finish.

Small Mount - Non powered
L 1.8in/4.5cm x W 1.8in/4.5cm x
H 0.3in/.7cm cylindrical plate in matching metal finish


Driver Box (240V Only)
240V version includes box to house drivers. Dimensions are L 1.2in/3cm x W 2.9in/7.5cm x H 4.5in/11.5cm

Certification
CE (240V)

240V Illumination
Integrated LED
Wattage: 10 Watts
Lumens: 400 Lumens est.
Color Temperature: 2700K
CRI: 90+
LED Lifetime: 70,000 Hours est.
Dimming: ELV or 0-10V

Driver location
Driver located in the Driver Box.

Fixture Mounting
Designed to be mounted on standard 4in. Electrical Box.
Two #8-32 screws included.
Additional mounting hardware provided for 240V versions.

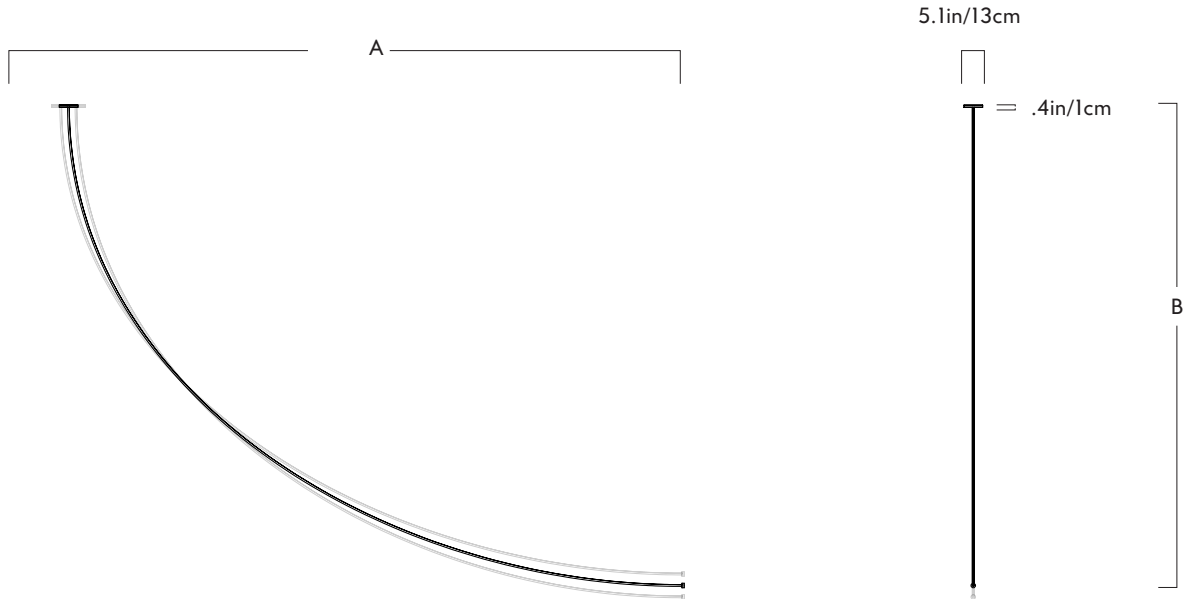

Pole

05 - Surface to Surface - 5 Sections - 120V

Series

Pole

Product

05 - Surface to Surface - 5 Sections - 120V

Dimensions

	A	B
Min.	158in / 401cm	129in / 328cm
Preferred	161in / 409cm	126in / 320cm
Max.	164in / 417cm	123in / 312cm

Weight

5.6lb/2.5kg

Materials

Aluminum, stainless steel, silicone

Metal Finishes

Black

Large Mount - Powered

L 5.1in/13cm x W 5.1in/13cm x
 H 0.4in/1cm cylindrical plate in matching
 metal finish

Small Mount - Non powered

L 1.8in/4.5cm x W 1.8in/4.5cm x
 H 0.3in/.7cm cylindrical plate in
 matching metal finish

Certifications

UL, cUL (120V)

120V Illumination


Integrated LED
 Wattage: 13 Watts
 Lumens: 500 Lumens est.
 Color Temperature: 2700K
 CRI: 90+
 LED Lifetime: 70,000 Hours est.
 Dimming: Triac, ELV or 0-10V

Driver location

Driver located in the J-Box

Fixture Mounting

Designed to be mounted on standard
 4in. Electrical Box.
 Two #8-32 screws included.

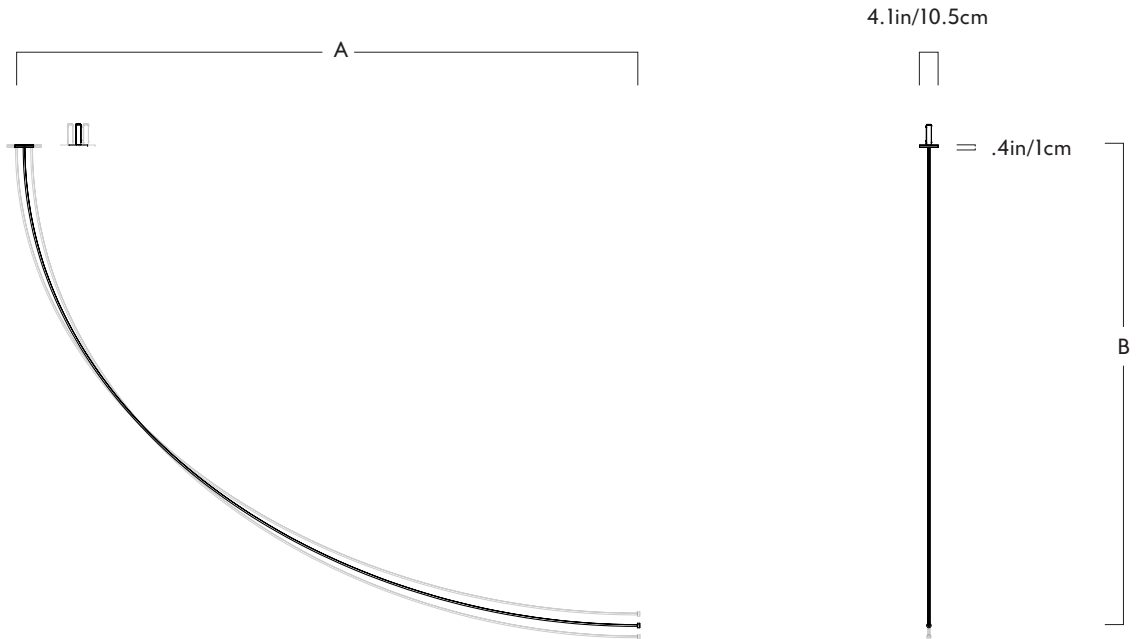

Pole

05 - Surface to Surface - 5 Sections - 240V

Series

Pole

Product
 05 - Surface to Surface - 5 Sections - 240V

Dimensions	A	B
Min.	158in / 401cm	129in / 328cm
Preferred	161in / 409cm	126in / 320cm
Max.	164in / 417cm	123in / 312cm

Weight
 7.5lb/43.4kg

Materials
 Aluminum, stainless steel, silicone

Metal Finishes
 Black

Large Mount - Powered
 L 4.1in/10.5cm x W 4.1in/10.5cm x
 H 0.4in/1cm cylindrical plate in matching
 metal finish.

Small Mount - Non powered
 L 1.8in/4.5cm x W 1.8in/4.5cm x
 H 0.3in/.7cm cylindrical plate in
 matching metal finish


Driver Box (240V Only)
 240V version includes box to house
 drivers. Dimensions are L 1.2in/3cm x W
 2.9in/7.5cm x H 4.5in/11.5cm

Certification
 CE (240V)

240V Illumination
 Integrated LED
 Wattage: 13 Watts
 Lumens: 500 Lumens est.
 Color Temperature: 2700K
 CRI: 90+
 LED Lifetime: 70,000 Hours est.
 Dimming: ELV or 0-10V

Driver location
 Driver located in the Driver Box.

Fixture Mounting
 Designed to be mounted on standard
 4in. Electrical Box.
 Two #8-32 screws included.
 Additional mounting hardware provided
 for 240V versions.

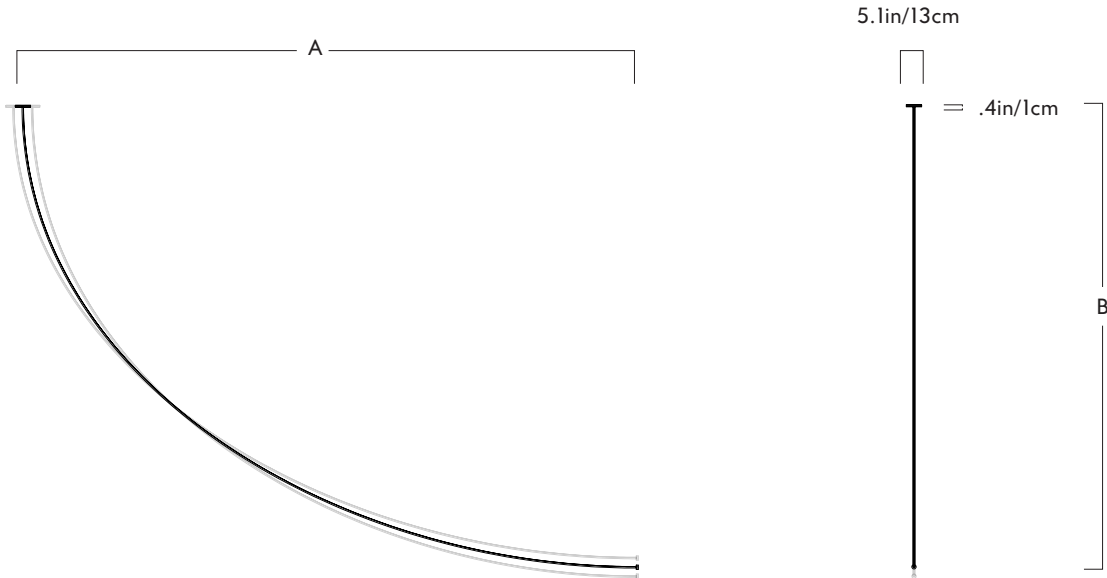

Pole

05 - Surface to Surface - 6 Sections - 120V

Series

Pole

Materials
 Aluminum, stainless steel, silicone

120V Illumination
 Integrated LED
 Wattage: 15 Watts
 Lumens: 600 Lumens est.
 Color Temperature: 2700K
 CRI: 90+
 LED Lifetime: 70,000 Hours est.
 Dimming: Triac, ELV or 0-10V

Product
 05 - Surface to Surface - 6 Sections - 120V

Metal Finishes
 Black

Driver location
 Driver located in the J-Box

Dimensions	A	B
Min.	195in / 495cm	151in / 383cm
Preferred	198in / 503cm	148in / 376cm
Max.	201in / 511cm	145in / 368cm


Large Mount - Powered
 L 5.1in/13cm x W 5.1in/13cm x
 H 0.4in/1cm cylindrical plate in matching metal finish

Small Mount - Non powered
 L 1.8in/4.5cm x W 1.8in/4.5cm x
 H 0.3in/.7cm cylindrical plate in matching metal finish

Fixture Mounting
 Designed to be mounted on standard 4in. Electrical Box.
 Two #8-32 screws included.

Weight
 6.2lb/2.8kg

Certifications
 UL, cUL (120V)

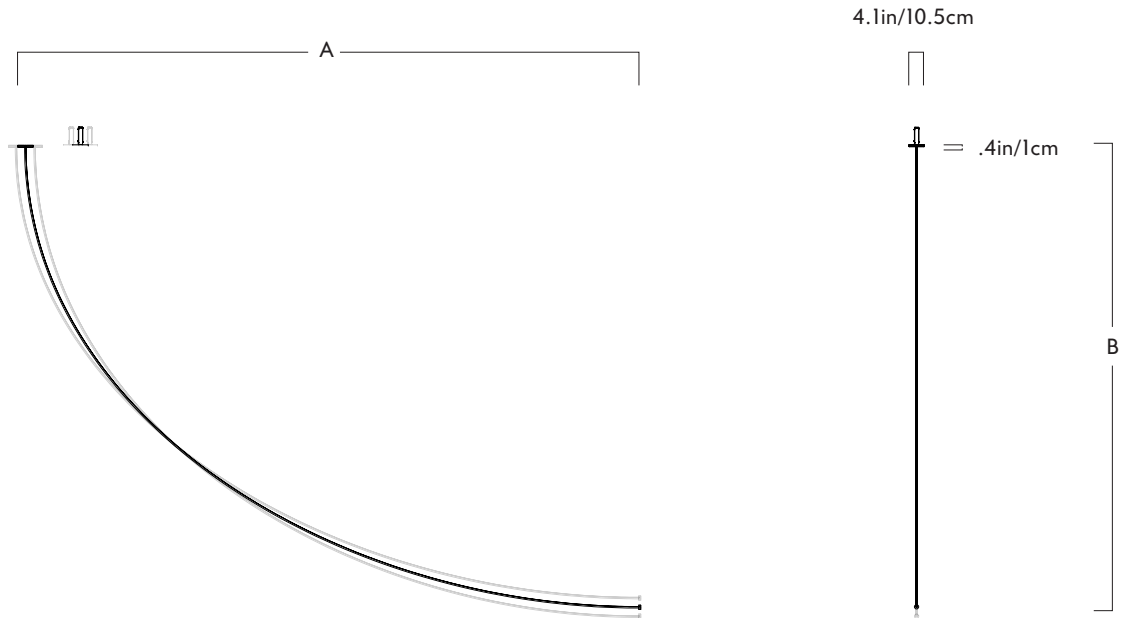

Pole

05 - Surface to Surface - 6 Sections - 240V

Series
Pole

Product
05 - Surface to Surface - 6 Sections - 240V

<u>Dimensions</u>	A	B
Min.	195in / 495cm	151in / 383cm
Preferred	198in / 503cm	148in / 376cm
Max.	201in / 511cm	145in / 368cm

Weight
8.1lb/3.7kg

Materials
Aluminum, stainless steel, silicone

Metal Finishes
Black

Large Mount - Powered
L 4.1in/10.5cm x W 4.1in/10.5cm x
H 0.4in/1cm cylindrical plate in matching
metal finish.

Small Mount - Non powered
L 1.8in/4.5cm x W 1.8in/4.5cm x
H 0.3in/.7cm cylindrical plate in
matching metal finish


Driver Box (240V Only)
240V version includes box to house
drivers. Dimensions are L 1.2in/3cm x
W 2.9in/7.5cm x H 4.5in/11.5cm

Certification
CE (240V)

240V Illumination
Integrated LED
Wattage: 15 Watts
Lumens: 600 Lumens est.
Color Temperature: 2700K
CRI: 90+
LED Lifetime: 70,000 Hours est.
Dimming: ELV or 0-10V

Driver location
Driver located in the Driver Box.

Fixture Mounting
Designed to be mounted on standard
4in. Electrical Box.
Two #8-32 screws included.
Additional mounting hardware provided
for 240V versions.

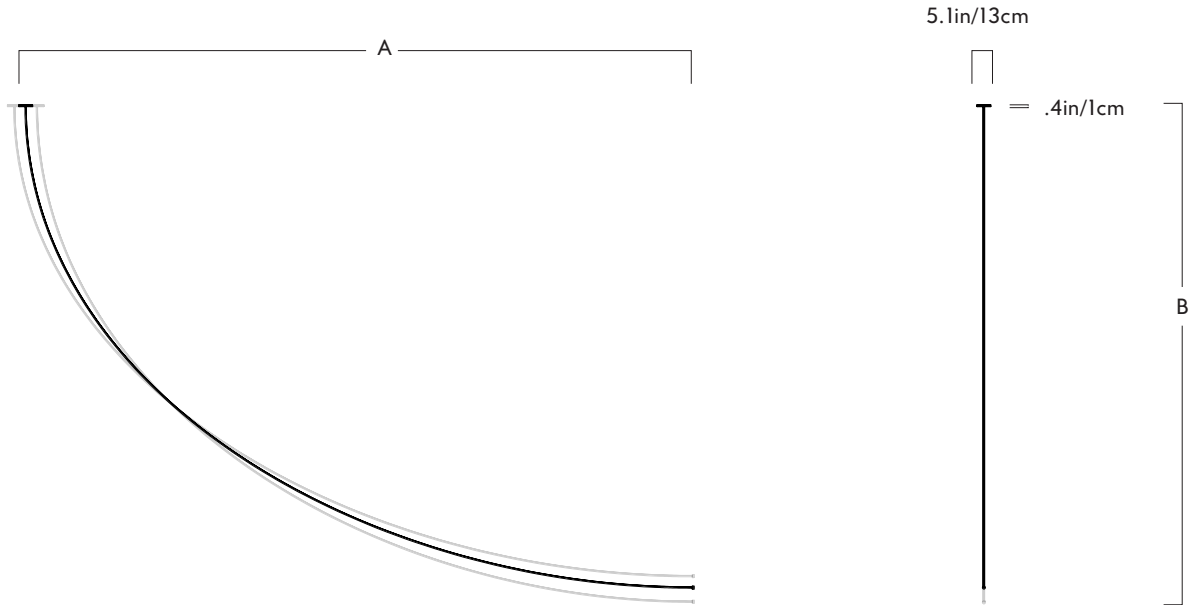

Pole

05 - Surface to Surface - 7 Sections - 120V

Series
Pole

Materials
Aluminum, stainless steel, silicone

120V Illumination
Integrated LED

Product
05 - Surface to Surface - 7 Sections - 120V

Metal Finishes
Black

Wattage: 18 Watts
 Lumens: 700 Lumens est.
 Color Temperature: 2700K
 CRI: 90+
 LED Lifetime: 70,000 Hours est.
 Dimming: Triac, ELV or 0-10V

Dimensions

	A	B
Min.	231in / 587cm	174in / 442cm
Preferred	235in / 597cm	170in / 432cm
Max.	239in / 607cm	166in / 422cm

Large Mount - Powered
 L 5.1in/13cm x W 5.1in/13cm x
 H 0.4in/1cm cylindrical plate in matching metal finish


Driver location
Driver located in the J-Box

Weight
6.8lb/3.1kg

Small Mount - Non powered
 L 1.8in/4.5cm x W 1.8in/4.5cm x
 H 0.3in/.7cm cylindrical plate in matching metal finish

Fixture Mounting
 Designed to be mounted on standard 4in. Electrical Box.
 Two #8-32 screws included.

Certifications
UL, cUL (120V)

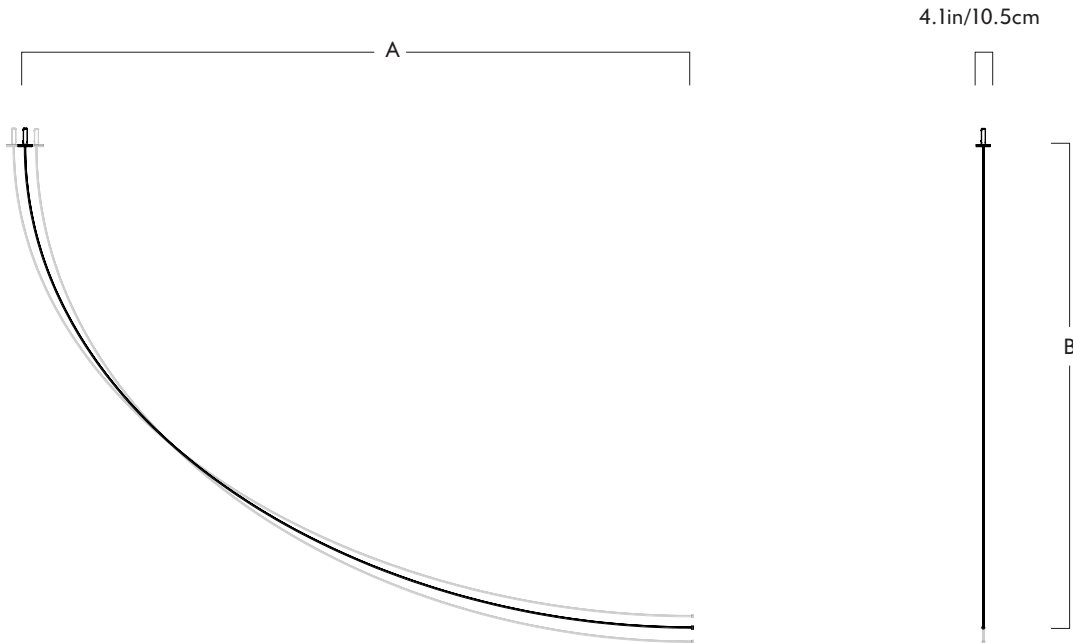

Pole

05 - Surface to Surface - 7 Sections - 240V

Series
Pole

Materials
Aluminum, stainless steel, silicone

240V Illumination

Integrated LED
 Wattage: 18 Watts
 Lumens: 700 Lumens est.
 Color Temperature: 2700K
 CRI: 90+
 LED Lifetime: 70,000 Hours est.
 Dimming: ELV or 0-10V

Product
05 - Surface to Surface - 7 Sections - 240V

Metal Finishes
Black

Driver location

Driver located in the Driver Box.

<u>Dimensions</u>	A	B
Min.	231in / 587cm	174in / 442cm
Preferred	235in / 597cm	170in / 432cm
Max.	239in / 607cm	166in / 422cm

Large Mount - Powered
 L 4.1in/10.5cm x W 4.1in/10.5cm x
 H 0.4in/1cm cylindrical plate in matching
 metal finish.

Small Mount - Non powered
 L 1.8in/4.5cm x W 1.8in/4.5cm x
 H 0.3in/.7cm cylindrical plate in
 matching metal finish


Fixture Mounting

Designed to be mounted on standard
 4in. Electrical Box.
 Two #8-32 screws included.
 Additional mounting hardware provided
 for 240V versions.

Weight
8.7lb/3.9kg

Driver Box (240V Only)
 240V version includes box to house
 drivers. Dimensions are L 1.2in/3cm x
 W 2.9in/7.5cm x H 4.5in/11.5cm

Certification
CE (240V)

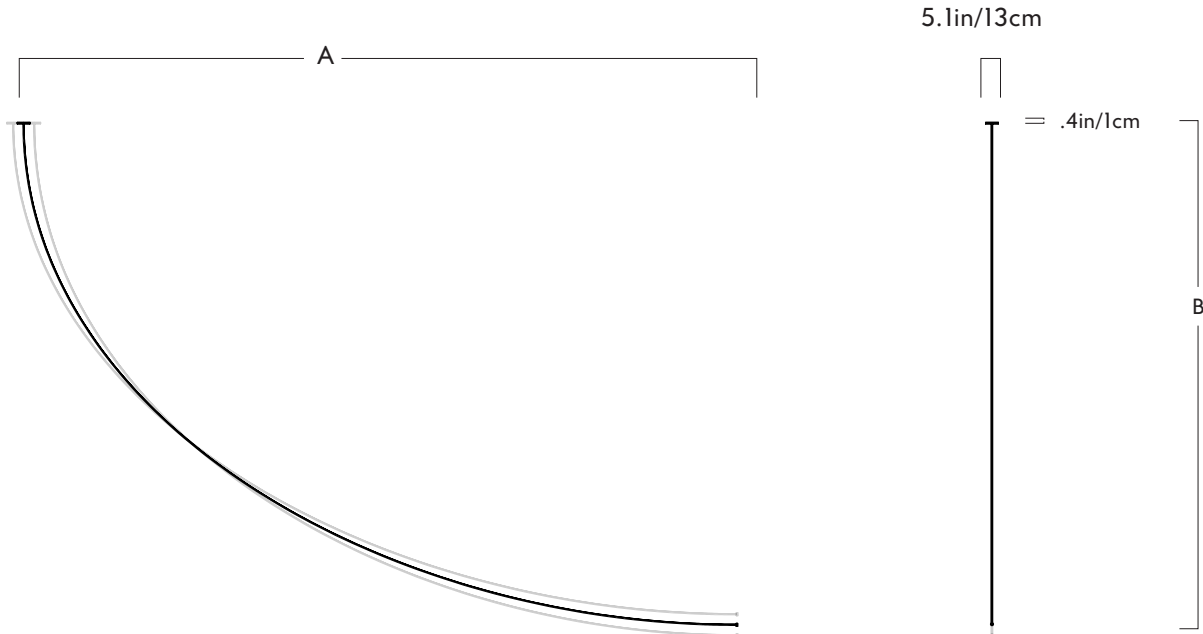

Pole

05 - Surface to Surface - 8 Sections - 120V

Series
Pole

Materials
Aluminum, stainless steel, silicone

120V Illumination
 Integrated LED
 Wattage: 20 Watts
 Lumens: 800 Lumens est.
 Color Temperature: 2700K
 CRI: 90+
 LED Lifetime: 70,000 Hours est.
 Dimming: Triac, ELV or 0-10V

Product
05 - Surface to Surface - 8 Sections - 120V

Metal Finishes
Black

Driver location
Driver located in the J-Box

<u>Dimensions</u>	A	B
Min.	267in / 678cm	195in / 495cm
Preferred	271in / 688cm	191in / 485cm
Max.	275in / 699cm	187in / 475cm


Large Mount - Powered
 L 5.1in/13cm x W 5.1in/13cm x
 H 0.4in/1cm cylindrical plate in matching
 metal finish

Small Mount - Non powered
 L 1.8in/4.5cm x W 1.8in/4.5cm x
 H 0.3in/.7cm cylindrical plate in
 matching metal finish

Fixture Mounting
 Designed to be mounted on standard
 4in. Electrical Box.
 Two #8-32 screws included.

Weight
7.4lb/3.4kg

Certifications
UL, cUL (120V)

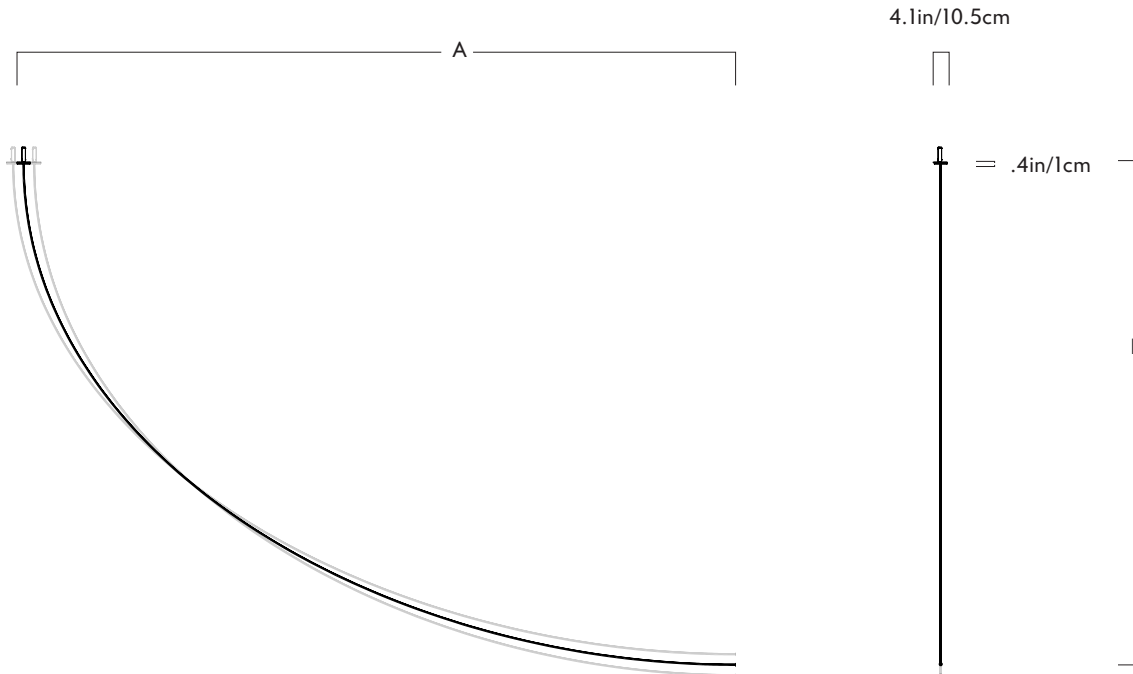

Pole

05 - Surface to Surface - 8 Sections - 240V

Series
Pole

Product
05 - Surface to Surface - 8 Sections - 240V

<u>Dimensions</u>	A	B
Min.	267in / 678cm	195in / 495cm
Preferred	271in / 688cm	191in / 485cm
Max.	275in / 699cm	187in / 475cm

Weight
9.3lb/4.2kg

Materials
Aluminum, stainless steel, silicone

Metal Finishes
Black

Large Mount - Powered
L 4.1in/10.5cm x W 4.1in/10.5cm x
H 0.4in/1cm cylindrical plate in matching metal finish.

Small Mount - Non powered
L 1.8in/4.5cm x W 1.8in/4.5cm x
H 0.3in/.7cm cylindrical plate in matching metal finish

Driver Box (240V Only)
240V version includes box to house drivers. Dimensions are L 1.2in/3cm x W 2.9in/7.5cm x H 4.5in/11.5cm

Certification
CE (240V)

240V Illumination
Integrated LED
Wattage: 20 Watts
Lumens: 800 Lumens est.
Color Temperature: 2700K
CRI: 90+
LED Lifetime: 70,000 Hours est.
Dimming: ELV or 0-10V

Driver location
Driver located in the Driver Box.

Fixture Mounting
Designed to be mounted on standard 4in. Electrical Box.
Two #8-32 screws included.
Additional mounting hardware provided for 240V versions.