

Single Body



Aries Pendants

Lead Time 14 - 16 weeks

Dimensions Indicated in the drawings above

Weight

Single: 1.25 lb / 0.57 kg Double: 1.45 lb / 0.66 kg

LED Illumination 24 VDC LED PCB 0-10V dimming on request 2700 Kelvin

Electrical

Wattage: 1.4 Watt Lumens: 168 Lumens 110 - 240 VAC 277 VAC upon request

Installation - Standard

Locally mounted driver - no dimming Canopy: 5 x 1.5 inch (127 x 38 mm) round in matching metal finish

Installation - Alternate

Locally mounted driver with dimming 0-10V wireless (Lutron Pico) Canopy: 8 x 1.625 inch (203 x 41 mm) round in matching metal finish

Remotely mounted driver with dimming Dimming: 0-10V hardwired Canopy: 5 x 0.25 inch (127 x 6 mm) round in matching metal finish

Suspension / Wiring

One 24V low voltage power / suspension cable to electrical connection. Metal stem in matching finish available on request. Variable suspension height.

UL / cUL Listed

Materials

Finished Aluminum Clear Glass Prism

Standard Finishes

Brushed Brass Bronze Satin Nickel Nickel Brass Contrast


Special Order Finishes

Polished Brass Polished Nickel Dark Pewter Polished Black Nickel Polished Copper Smoky Copper


Special Order Glass

Clear Diamond Glass Hand Painted Diamonds Fiber Optic Bundles


sales@twentieth.net 323.904.1200 w



FRONT



SIDE



Aries Sconce I.I (1.1)

Lead Time

14 - 16 weeks

Dimensions

3.25 inch x 3.3 inch x 11 inch H 83 mm x 84 mm x 280 mm H

Weight 1.3 lb / 0.6 kg

LED Illumination 24 VDC LED PCB 0-10V dimming 2700 Kelvin

Electrical Wattage: 2.8 Watt Lumens: 336 Lumens 110 - 240 VAC 277 VAC upon request

Installation

Remote: Backplate mounts directly to standard US single gang box Local: Upon request

Backplate 3 x 11 inch in matching metal finish

Materials

Finished Aluminum Clear Glass Prism

Standard Finishes

Brushed Brass Bronze Satin Nickel Nickel Brass Contrast

Special Order Finishes

Polished Brass Polished Nickel Dark Pewter Polished Black Nickel Polished Copper Smoky Copper


Special Order Glass


Clear Diamond Glass Hand Painted Diamonds Fiber Optic Bundles

UL / cUL Listed

twentieth

sales@twentieth.net 323.904.1200

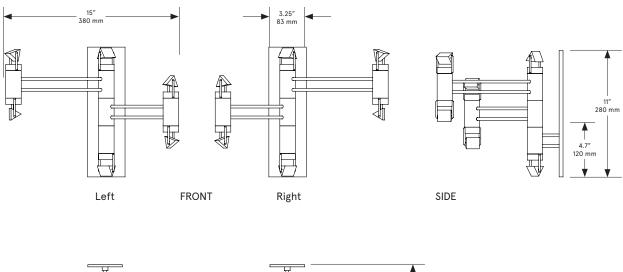

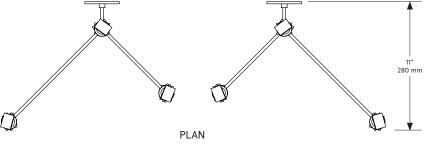

Aries Sconce III.I (3.1)

Lead Time

14 - 16 weeks

Dimensions 15 inch x 11 inch x 11 inch H 380 mm x 280 mm x 280 mm H

Weight 2.5 lb / 1.1 kg

LED Illumination 24 VDC LED PCB 0-10V dimming 2700 Kelvin

Electrical - Total Wattage: 8.4 Watt Lumens: 1008 Lumens 110 - 240 VAC 277 VAC upon request

Installation

Remote: Backplate mounts directly to standard US single gang box Local: Upon request

Backplate 3 x 11 inch in matching metal finish

Materials

Finished Aluminum Clear Glass Prism

Standard Finishes

Brushed Brass Bronze Satin Nickel Nickel Brass Contrast

Special Order Finishes

Polished Brass Polished Nickel Dark Pewter Polished Black Nickel Polished Copper Smoky Copper

Special Order Glass


Clear Diamond Glass Hand Painted Diamonds Fiber Optic Bundles


UL / cUL Listed


twentieth

sales@twentieth.net

323.904.1200







Aries IV.I (4.1)

Lead Time 14 - 16 weeks

Dimensions

24.5 inch diam. x 11 inch H 620 mm diam. x 280 mm H

Weight 2.5 lb / 0.6 kg

LED Illumination

24 VDC LED PCB 0-10V dimming 2700 Kelvin

Electrical

Wattage: 9.8 Watt Lumens: 1176 Lumens 110 - 240 VAC 277 VAC upon request

Installation - Standard

Locally mounted driver 120V Dimming: C·L (Lutron) switching 240V Dimming: O-10V wireless (Lutron Pico) Canopy: 9.25 x 1.6255 inch (235 x 41 mm) round in matching metal finish

Installation - Alternate

Remotely mounted driver 120V Dimming: C·L (Lutron) switching 240V Dimming: 0-10V hardwired Canopy: 5 x 0.25 inch (127 x 6 mm) round in matching metal finish

Please inquire for detailed electrical specs

Suspension / Wiring

One 24V low voltage power / suspension cable to electrical connection. Aircraft cable to ceiling-mounted adjustable fasteners. Variable suspension height.

UL / cUL Listed

Materials

Finished Aluminum Clear Glass Prism

Standard Finishes

Brushed Brass Bronze Satin Nickel Nickel Brass Contrast


Special Order Finishes


Polished Brass Polished Nickel Dark Pewter Polished Black Nickel Polished Copper Smoky Copper


Special Order Glass

Clear Diamond Glass Hand Painted Diamonds Fiber Optic Bundles


sales@twentieth.net 323.904.1200 wv







FRONT



SIDE

Aries V.I (5.1)

Lead Time 14 - 16 weeks

Dimensions

28 inch x 13 inch x 10 inch H 710 mm x 330 mm x 255 mm H

Weight 4 lb / 1.8 kg

LED Illumination

24 VDC LED PCB 0-10V dimming 2700 Kelvin

Electrical

Wattage: 12.6 Watt Lumens: 1512 Lumens 110 - 240 VAC 277 VAC upon request

Installation - Standard

Locally mounted driver 120V Dimming: C·L (Lutron) switching 240V Dimming: 0-10V wireless (Lutron Pico) Canopy: 9.25 x 1.6255 inch (235 x 41 mm) round in matching metal finish

Installation - Alternate

Remotely mounted driver 120V Dimming: C·L (Lutron) switching 240V Dimming: 0-10V hardwired Canopy: 5 x 0.25 inch (127 x 6 mm) round in matching metal finish

Please inquire for detailed electrical specs

Suspension / Wiring

One 24V low voltage power / suspension cable to electrical connection. Aircraft cable to ceiling-mounted adjustable fasteners. Variable suspension height.

UL / cUL Listed

Materials

Finished Aluminum Clear Glass Prism

Standard Finishes

Brushed Brass Bronze Satin Nickel Nickel Brass Contrast


Special Order Finishes


Polished Brass Polished Nickel Dark Pewter Polished Black Nickel Polished Copper Smoky Copper

Special Order Glass


Clear Diamond Glass Hand Painted Diamonds Fiber Optic Bundles

sales@twentieth.net 323.904.1200 wv





SIDE



PLAN

Aries VIII.I (8.1)

Lead Time 14 - 16 weeks

Dimensions

49 inch x 22 inch x 15 inch H 1245 mm x 560 mm x 380 mm H

Weight 6 lb / 2.7 kg

LED Illumination 24 VDC LED PCB 0-10V dimming

Electrical

2700 Kelvin

Wattage: 18.2 Watt Lumens: 2184 Lumens 110 - 240 VAC 277 VAC upon request

Installation - Standard

Locally mounted driver 120V Dimming: C·L (Lutron) switching 240V Dimming: O-10V wireless (Lutron Pico) Canopy: 9.25 x 1.6255 inch (235 x 41 mm) round in matching metal finish

Installation - Alternate

Remotely mounted driver 120V Dimming: C·L (Lutron) switching 240V Dimming: 0-10V hardwired Canopy: 5 x 0.25 inch (127 x 6 mm) round in matching metal finish

Please inquire for detailed electrical specs

Suspension / Wiring

One 24V low voltage power / suspension cable to electrical connection. Aircraft cable to ceiling-mounted adjustable fasteners. Variable suspension height.

UL / cUL Listed

Materials

Finished Aluminum Clear Glass Prism

Standard Finishes

Brushed Brass Bronze Satin Nickel Nickel Brass Contrast


Special Order Finishes


Polished Brass Polished Nickel Dark Pewter Polished Black Nickel Polished Copper Smoky Copper


Special Order Glass

Clear Diamond Glass Hand Painted Diamonds Fiber Optic Bundles

sales@twentieth.net 323.904.1200 wv

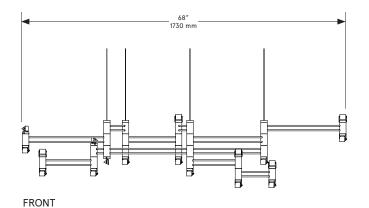



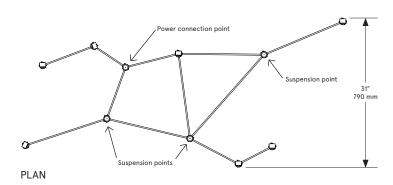

Aries XI.I (11.1)

Lead Time 14 - 16 weeks

Dimensions

68 inch x 31 inch x 15 inch H 1730 mm x 790 mm x 380 mm H

Weight 8.5 lb / 3.9 kg

LED Illumination 24 VDC LED PCB 0-10V dimming 2700 Kelvin

Electrical

Wattage: 25.2 Watt Lumens: 3024 Lumens 110 - 240 VAC 277 VAC upon request

Installation - Standard

Locally mounted driver 120V Dimming: C·L (Lutron) switching 240V Dimming: 0-10V wireless (Lutron Pico) Canopy: 9.25 x 1.6255 inch (235 x 41 mm) round in matching metal finish

Installation - Alternate

Remotely mounted driver 120V Dimming: C·L (Lutron) switching 240V Dimming: 0-10V hardwired Canopy: 5 x 0.25 inch (127 x 6 mm) round in matching metal finish

Please inquire for detailed electrical specs

Suspension / Wiring

One 24V low voltage power / suspension cable to electrical connection. Aircraft cable to ceiling-mounted adjustable fasteners. Variable suspension height.

UL / cUL Listed

Materials

Finished Aluminum Clear Glass Prism

Standard Finishes

Brushed Brass Bronze Satin Nickel Nickel Brass Contrast


Special Order Finishes

Polished Brass Polished Nickel Dark Pewter Polished Black Nickel Polished Copper Smoky Copper


Special Order Glass


Clear Diamond Glass Hand Painted Diamonds Fiber Optic Bundles

sales@twentieth.net 323.904.1200 ww

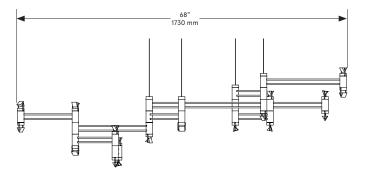





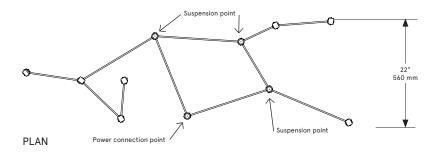

Aries XI.II (11.2)

Lead Time 14 - 16 weeks

Dimensions

68 inch x 22 inch x 20 inch H 1730 mm x 560 mm x 510 mm H

Weight 8.5 lb / 3.9 kg

LED Illumination 24 VDC LED PCB 0-10V dimming

Electrical

2700 Kelvin

Wattage: 22.4 Watt Lumens: 2688 Lumens 110 - 240 VAC 277 VAC upon request

Installation - Standard

Locally mounted driver 120V Dimming: C·L (Lutron) switching 240V Dimming: 0-10V wireless (Lutron Pico) Canopy: 9.25 x 1.6255 inch (235 x 41 mm) round in matching metal finish

Installation - Alternate

Remotely mounted driver 120V Dimming: C·L (Lutron) switching 240V Dimming: 0-10V hardwired Canopy: 5 x 0.25 inch (127 x 6 mm) round in matching metal finish

Please inquire for detailed electrical specs

Suspension / Wiring

One 24V low voltage power / suspension cable to electrical connection. Aircraft cable to ceiling-mounted adjustable fasteners. Variable suspension height.

UL / cUL Listed

Materials

Finished Aluminum Clear Glass Prism

Standard Finishes

Brushed Brass Bronze Satin Nickel Nickel Brass Contrast

Special Order Finishes

Polished Brass Polished Nickel Dark Pewter Polished Black Nickel Polished Copper Smoky Copper

Special Order Glass

Clear Diamond Glass Hand Painted Diamonds Fiber Optic Bundles

sales@twentieth.net 323.904.1200 wv