

Image shown above 118.7 with round canopy

± Ø140 - 160mm

Series	118
Mounting	Ceiling mounted
Glass Colours	White
Lamp	1.5W LED, 2500K, 130lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 118.3 - 118.7 Non-adjustable length: 118.13 - 118.61
Canopy Finishes	118.3 - 118.7: white, black or brushed nickel canopy 118.13 - 118.61: white canopy
Materials	Blown glass, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	Worldwide patents pending.

Certifications



Weight (kg)




Round

118.3	9.7
118.7	22.5
118.13	41.4
118.19	60.2
118.37	116.8
118.61	192.2

ADJUSTABLE LENGTH

NON-ADJUSTABLE LENGTH

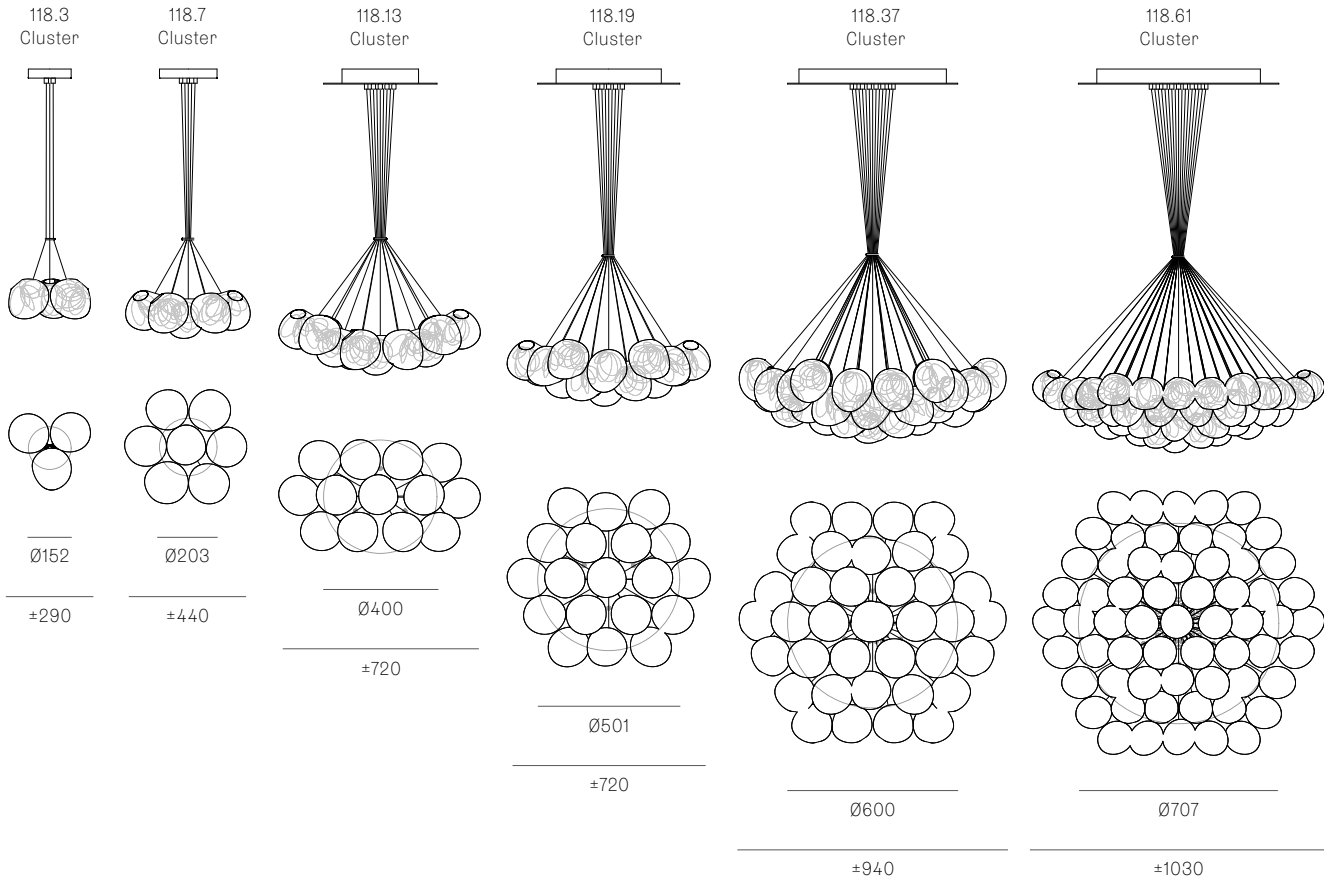

up to 3000 standard
up to 30500 custom

All dimensions are in millimeters (mm) unless otherwise specified.





Image shown above 118.11 with round canopy

± Ø140 - 160mm


Series	118
Mounting	Ceiling mounted
Glass Colours	White
Lamp	1.5W LED, 2500K, 130lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 118.1 - 118.9 Non-adjustable length: 118.11 - 118.28
Canopy Finishes	118.1 - 118.7: white, black or brushed nickel canopy 118.1mi/mo: white polyurethane canopy 118.9 - 118.28: white canopy
Materials	Blown glass, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 118.1m/mo/mi Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	Worldwide patents pending.

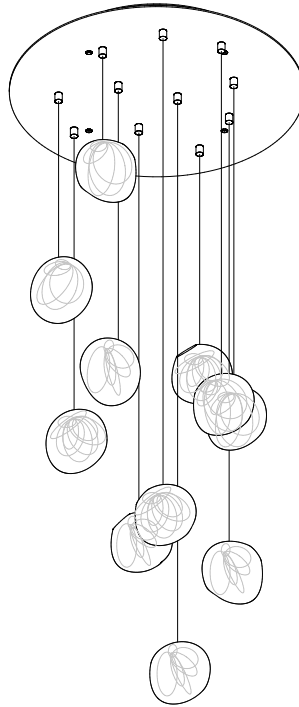

Weight (kg)


○		□	
Round		Square	
118.1	3.3	118.11	42.7
118.3	9.7	118.16	62.5
118.5	16.1	118.28	102
118.7	22.4		
118.11	42.7		
118.20	76.5	□	
		Rectangle	
		118.9	33.7
		118.11	42.7
		118.16	62.5
		118.20	76.5
		118.28	102

ADJUSTABLE LENGTH

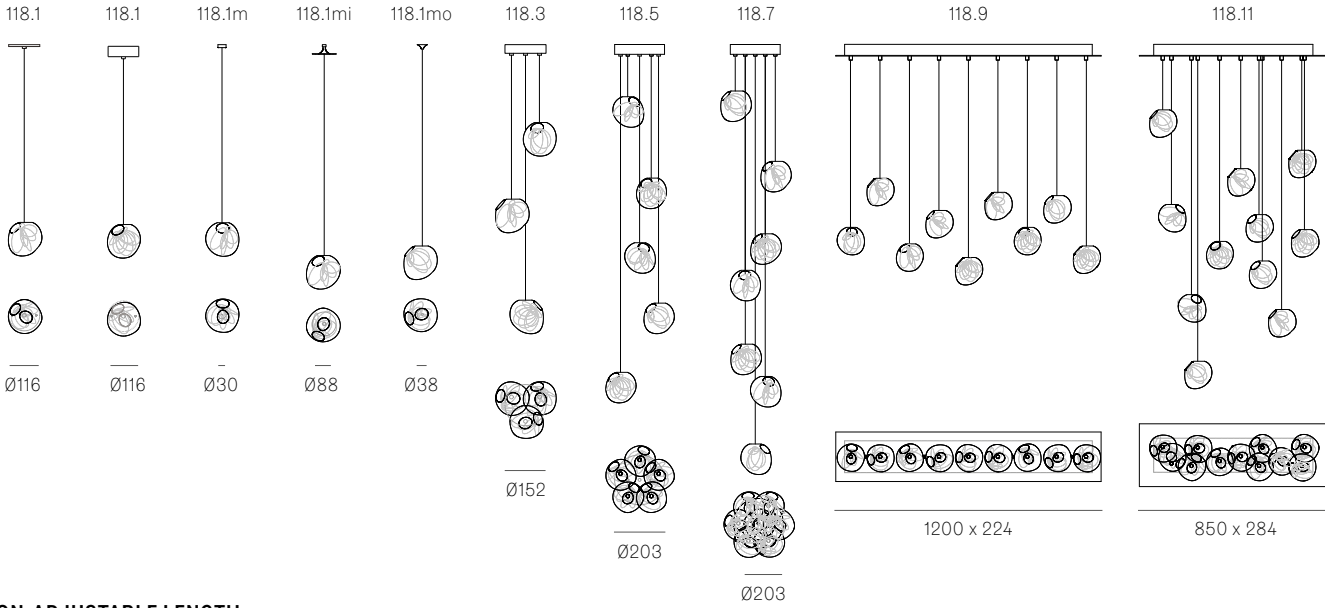

up to 3000 standard
up to 30500 custom

NON-ADJUSTABLE LENGTH

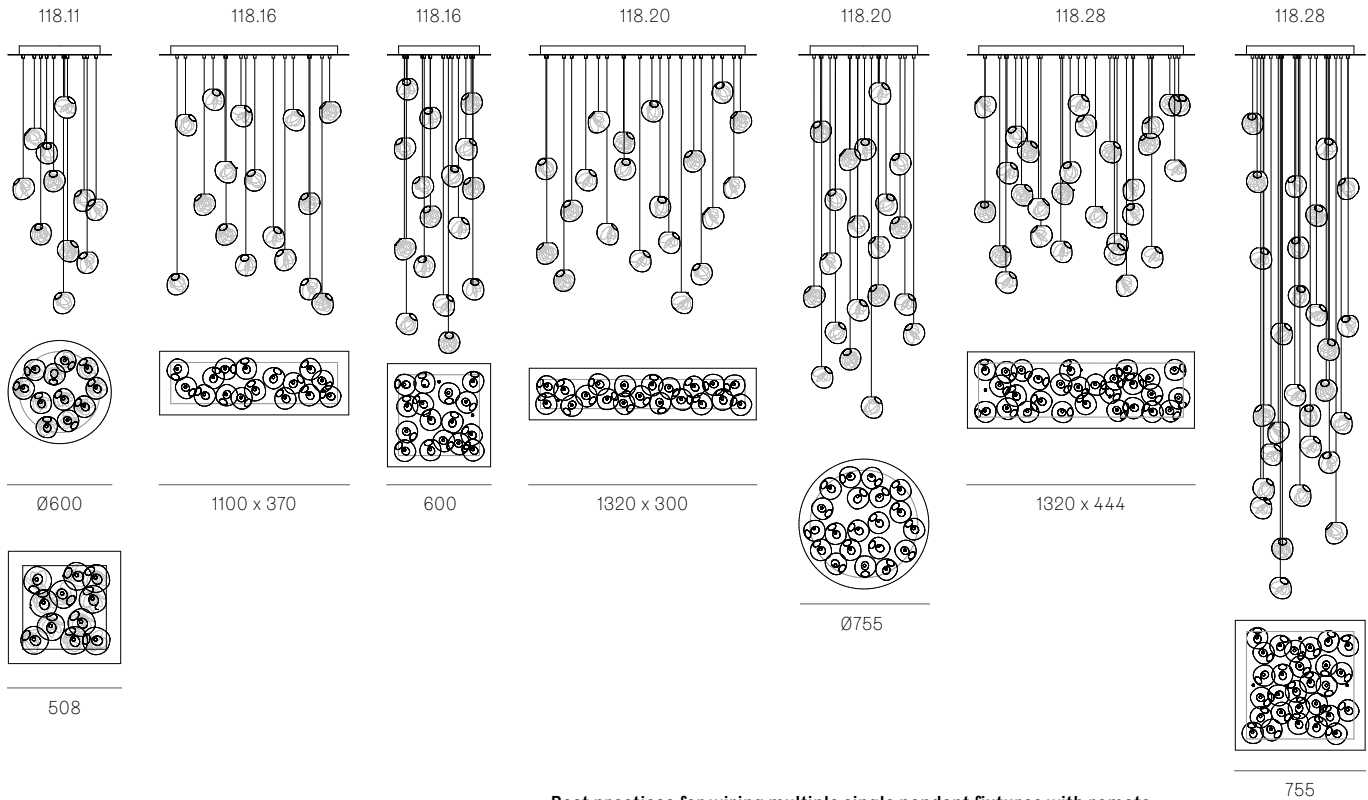

up to 3000 standard
up to 30500 custom

Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.

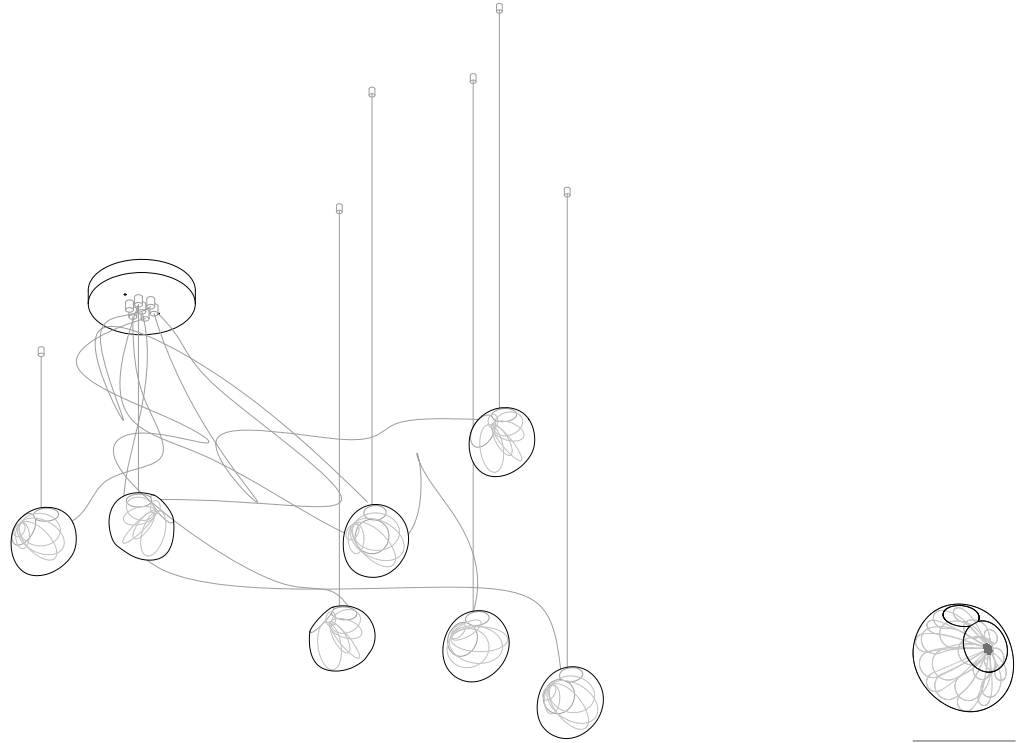


Image shown above 118.7 with round canopy

± Ø140 - 160mm

Series	118
Mounting	Ceiling mounted
Glass Colours	Clear
Lamp	1.5W LED, 2500K, 130lm
Sculptural Cable	3000mm standard / up to 30500mm maximum Adjustable length: 118.1 - 118.7 Non-adjustable Length: 118.13 - 118.61
Cable Finishes	Black or nickel
Canopy Finishes	118.1 - 118.7: white, black or brushed nickel canopy 118.1mi/mo: white polyurethane canopy 118.13 - 118.61: white canopy
Materials	Blown glass, braided metal cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 118.1m/mo/mi Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Pendant anchor kit included. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	Worldwide patents pending.

Certifications



Weight (kg)




Round

118.1	3.3
118.3	9.7
118.7	22.5
118.13	45.1
118.19	71.1
118.37	129.5
118.61	205.8


Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel, DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

ADJUSTABLE LENGTH

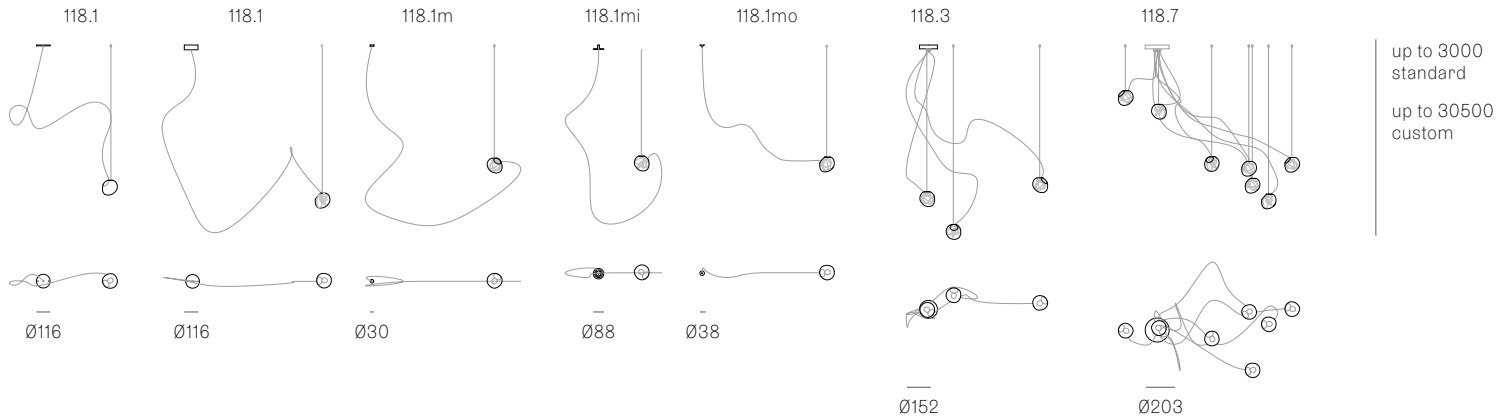

NON-ADJUSTABLE LENGTH

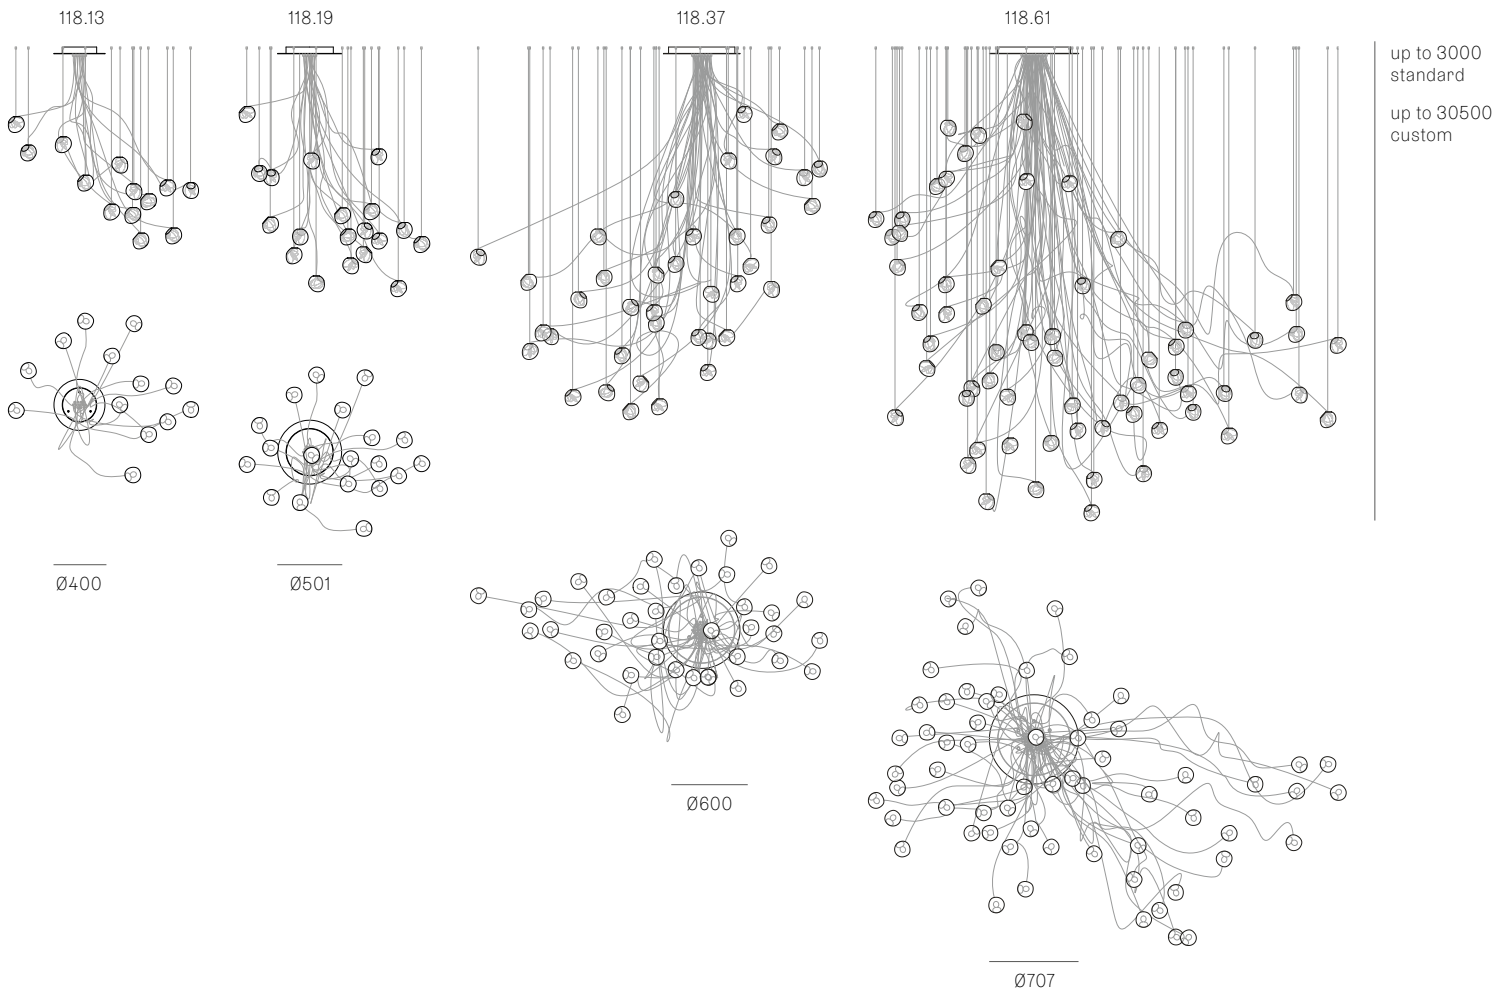

All dimensions are in millimeters (mm) unless otherwise specified.

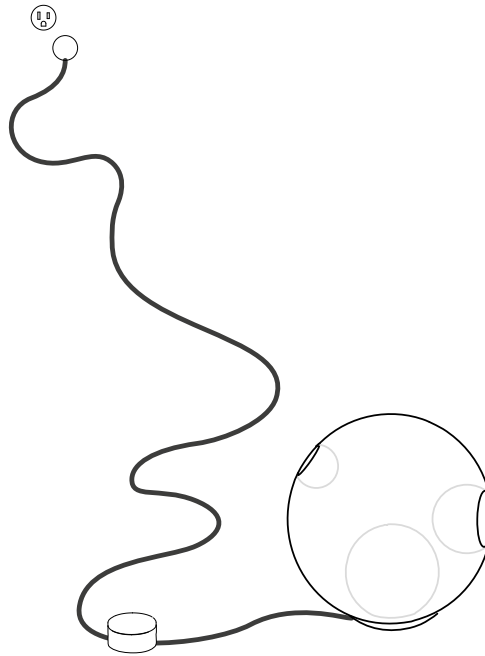


Image shown above 28t

Series 28, 38V, 57, 73, 84, 84V, 100, 118

Glass Colours 28: Clear, colour pendants
 38V: Clear
 57: Grey, white, light mirror, dark mirror
 73: Clear, grey 1, grey 2, grey 3
 84/84Vt: White/copper
 100: Frosted clear, frosted grey
 118: White

Lamp 1.5W LED, 2500K, 130lm
 84/84V, 1.5W LED, 3500K, 130lm

Plug Types Type A - 110V
 Type C - 230V
 Type G - 230V
 Type I - 230V

Base Ø75mm

Cable length 2290mm black flexible cord

Finish Unlacquered brass base and dial control

Materials Glass, brass, electrical components

Power Supply Integral, dial control with build-in dimmer
 Input 100-240V, 0.5A 50-60Hz
 Output 12V
 Ta 25°C

Dimming Built-in dimmer ONLY

Environment Indoor, dry location. IP30

Note The brass used in our Table Light is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.


Patent # 28: US D687,740
 EU 001695834-001 to 004
 38V: EU 002071019-001
 57: US D796732
 EU 002268581-0001 to 0006
 73: US D762,323 S
 EU 002633230-0001 - 0003
 84: EU 003611144-0001 to 0004
 100: US Patent pending
 EU 008526131-0001
 118: Worldwide patents pending

Certifications




Weight (kg)


28t	1	84t	2
38Vt	2.5	84Vt	2
57t	2	100t	4
73t	2.7	118t	3.6

PLUG TYPES

Type A



Type C




Type G



Type I


TABLE LIGHT

± Ø165




28t

Ø190 - 215

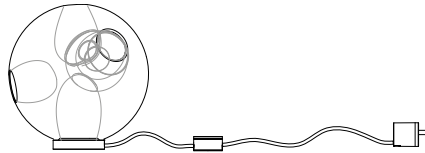


38Vt

100 - 150




57t

± 230 - 380




73t

± Ø100 - 120




84t

± Ø135




84Vt

± 190

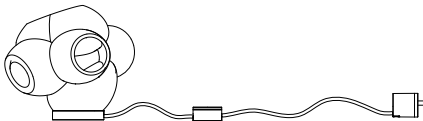

100t

± Ø140 - 160mm



118t

All dimensions are in millimeters (mm)
unless otherwise specified.





Image shown 118s (left), 118sp (center), 118s Brass (right)


± Ø140 - 160mm

Series	118
Mounting	Wall mounted
Glass Colours	White
Lamp	1.5W LED, 2500K, 130lm
Canopy Finishes	118s & 118sp: White canopy 118s Brass: Brass
Materials	Blown glass, electrical components, steel canopy. Brass canopy for 118s/118s Brass.
Power Supply	118s & 118s Brass: Remote mounted 118sp: Integral Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	118s/sp: Indoor/outdoor, wet location. IP55 118s Brass: Indoor, dry location. IP30
Note	Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	Worldwide patents pending.
Certifications	

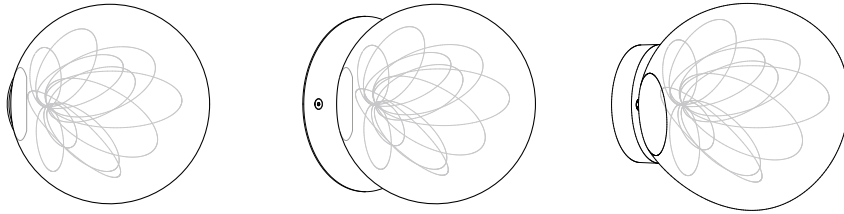


Weight (kg)

118s	3.3
118sp	3.3
118s Brass	3.6

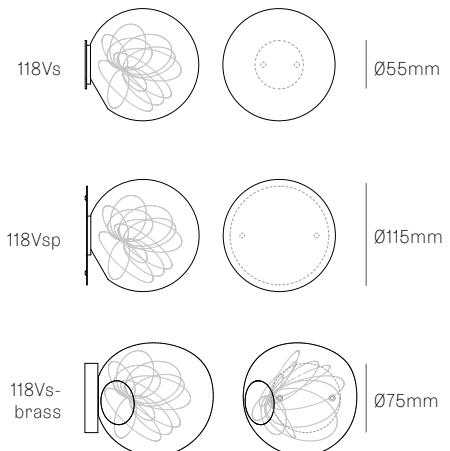


XXX.3 CLUSTER
SPECIFICATION

Pendants	Three
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

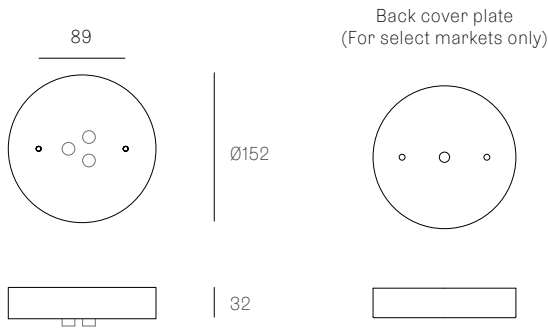

XXX.7 CLUSTER
SPECIFICATION


Pendants	Seven
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

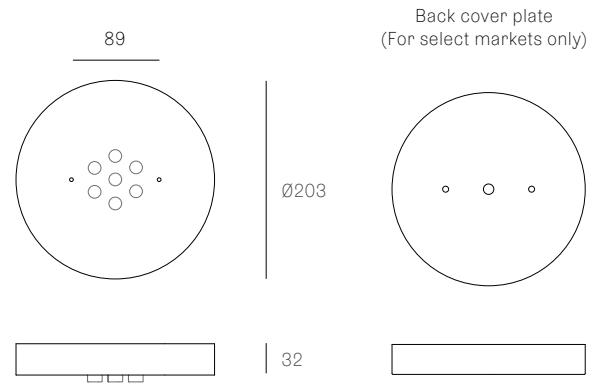

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.13 CLUSTER
SPECIFICATION

Pendants	Thirteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø250 x 16

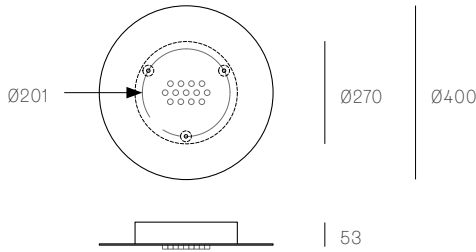


XXX.19 CLUSTER
SPECIFICATION

Pendants	Nineteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø355 x 16

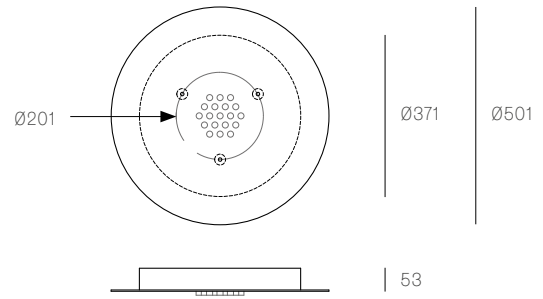


XXX.37 CLUSTER
SPECIFICATION

Pendants	Thirty-seven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø454 x 16

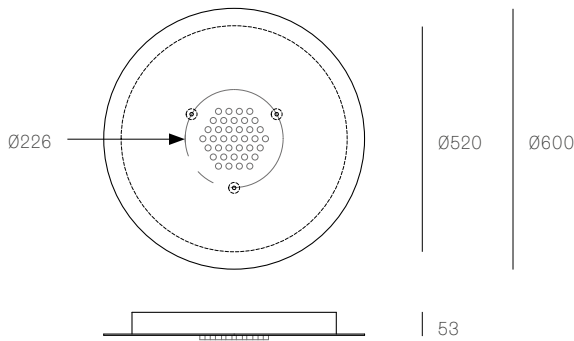

XXX.61 CLUSTER
SPECIFICATION


Pendants	Sixty-one
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø561 x 16

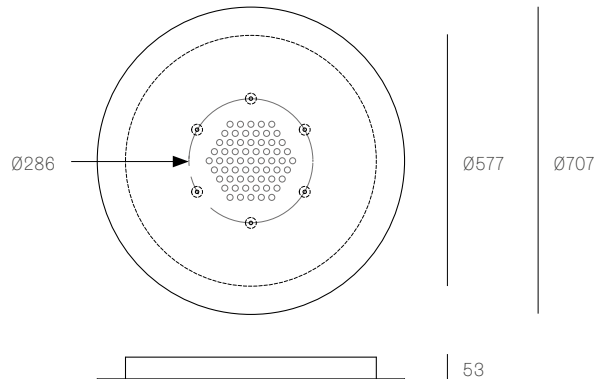

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.1
SPECIFICATION

Pendant	One
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral Remote for select markets only




XXX.1 DEEP
SPECIFICATION

Pendant	One
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

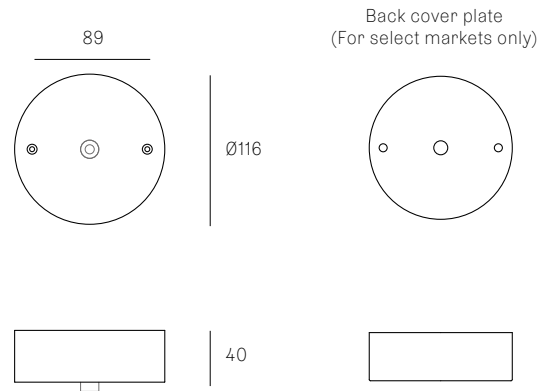


XXX.1M
SPECIFICATION

Pendant	One
Materials	Brushed nickel or white powder coated zinc cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote



XXX.1MI
SPECIFICATION


Pendant	One
Material	White polyurethane
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote



All dimensions are in millimeters (mm) unless otherwise specified.


XXX.1M0
SPECIFICATION

Pendant	One
Material	White polyurethane
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote




XXX.3
SPECIFICATION

Pendants	Three
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

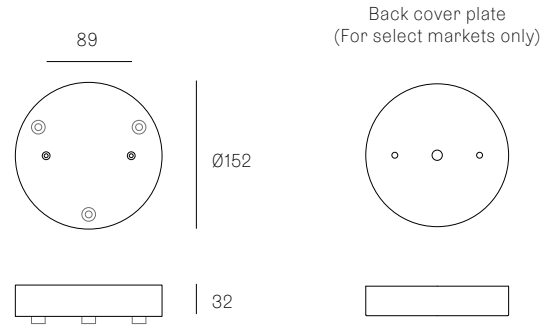


73.3
SPECIFICATION

Pendants	Three
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

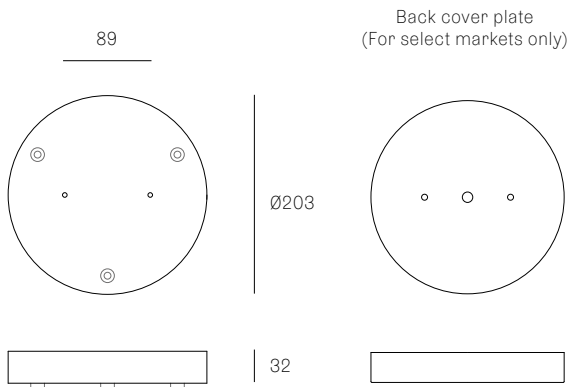

XXX.5
SPECIFICATION


Pendants	Five
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

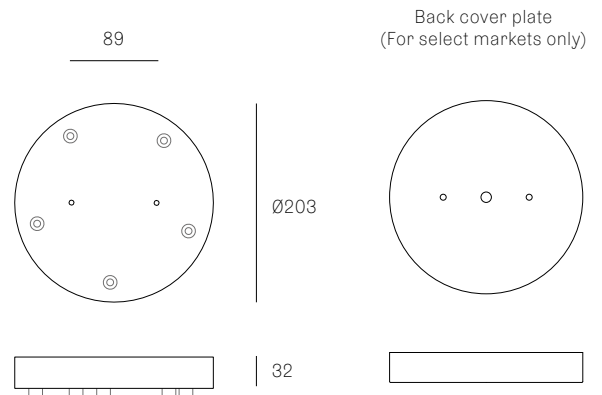

All dimensions are in millimeters (mm)
unless otherwise specified.

XXX.7
SPECIFICATION


Pendants	Seven
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

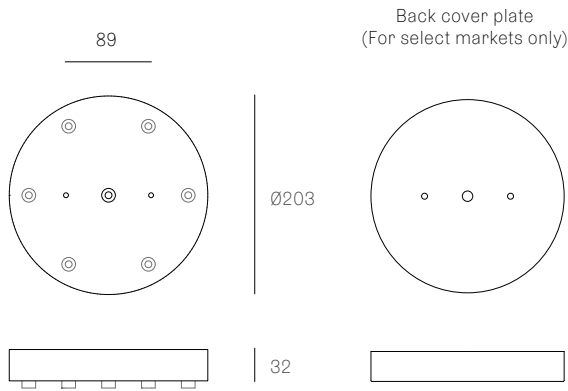

All dimensions are in millimeters (mm) unless otherwise specified.


38.8V / 73.8 RECTANGLE
SPECIFICATION

Pendants	Eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 138 x 16

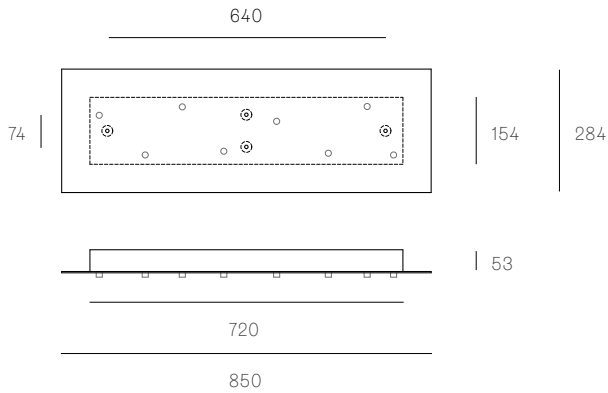


38.8V / 73.8 ROUND
SPECIFICATION

Pendants	Eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	∅362 x 16

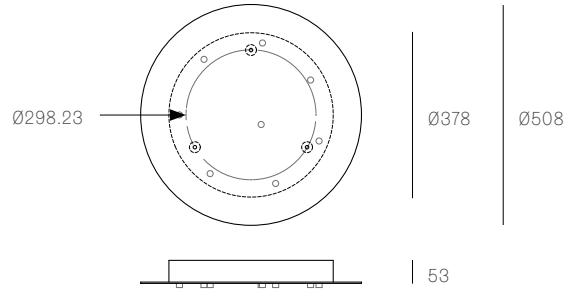


XXX.9 RECTANGLE
SPECIFICATION

Pendants	Nine
Material	White powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1108 x 132 x 16

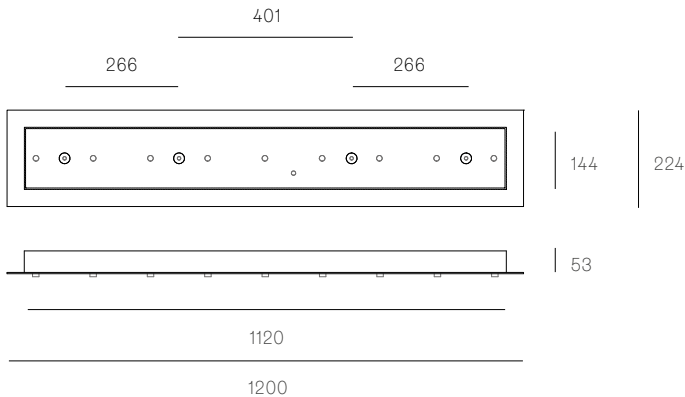

XXX.11 RECTANGLE
SPECIFICATION


Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 138 x 16

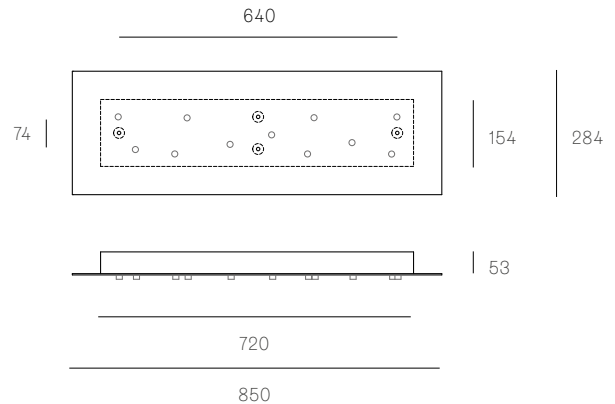

All dimensions are in millimeters (mm) unless otherwise specified.


38.11V / 73.11 RECTANGLE
SPECIFICATION

Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	854 x 224 x 16

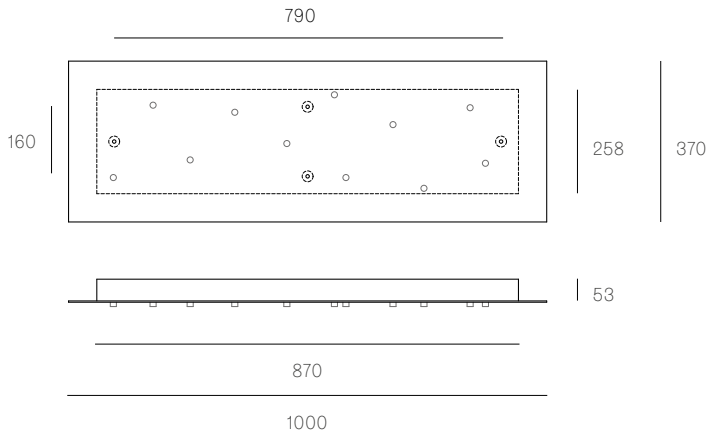


XXX.11 ROUND
SPECIFICATION

Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø362 x 16

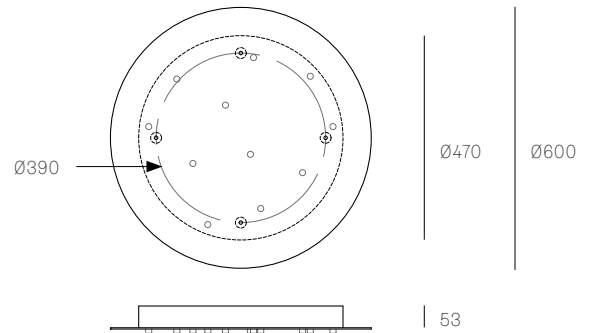


XXX.11 SQUARE
SPECIFICATION

Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	362 x 362 x 16

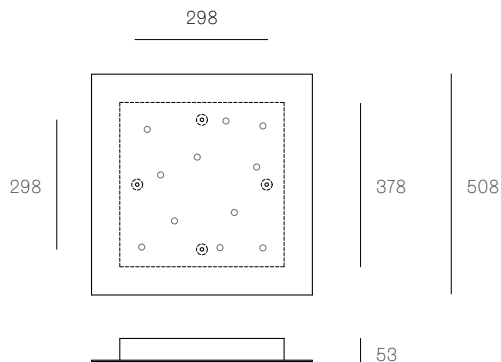

XXX.14 RECTANGLE
SPECIFICATION


Pendants	Fourteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 138 x 16

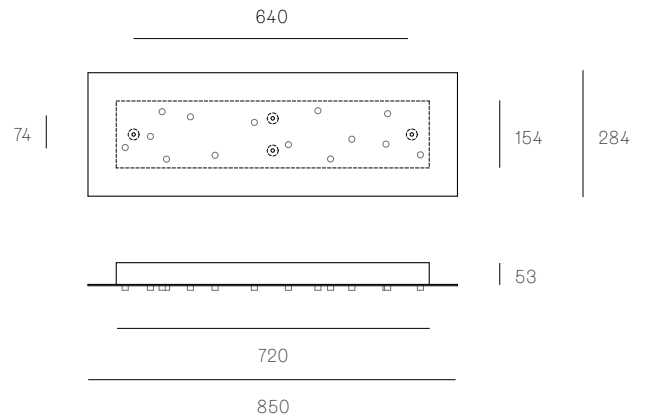

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.14 ROUND
SPECIFICATION

Pendants	Fourteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø362 x 16

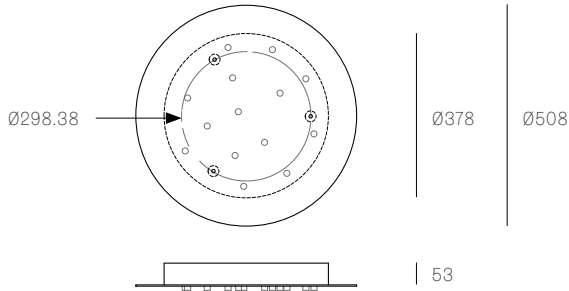


XXX.16 RECTANGLE
SPECIFICATION

Pendants	Sixteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	954 x 224 x 16

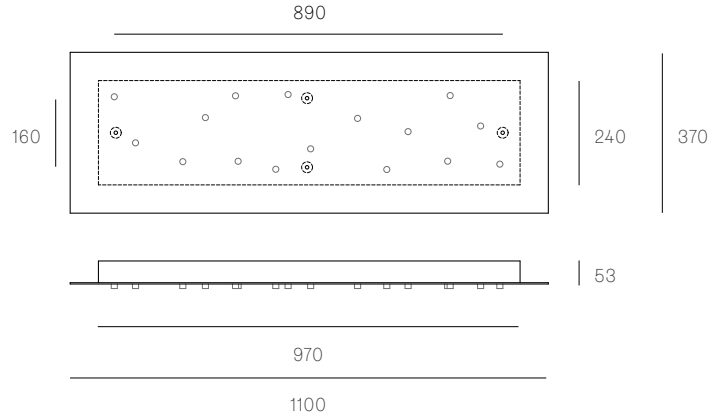


XXX.16 SQUARE
SPECIFICATION

Pendants	Sixteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	454 x 454 x 16

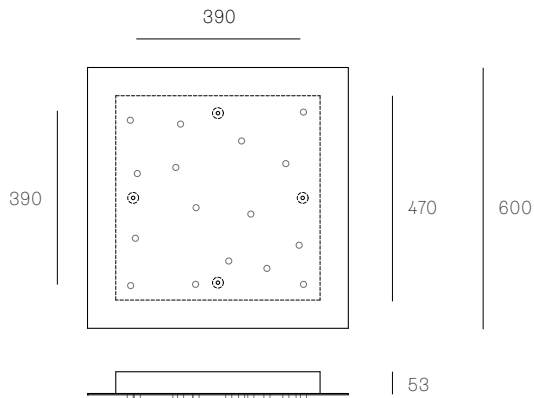

XXX.20 RECTANGLE
SPECIFICATION


Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1174 x 154 x 16

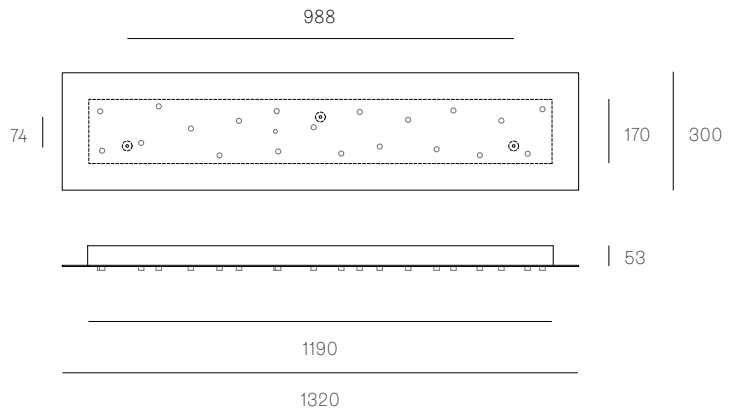

All dimensions are in millimeters (mm) unless otherwise specified.


73.20 RECTANGLE
SPECIFICATION

Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1174 x 299 x 16

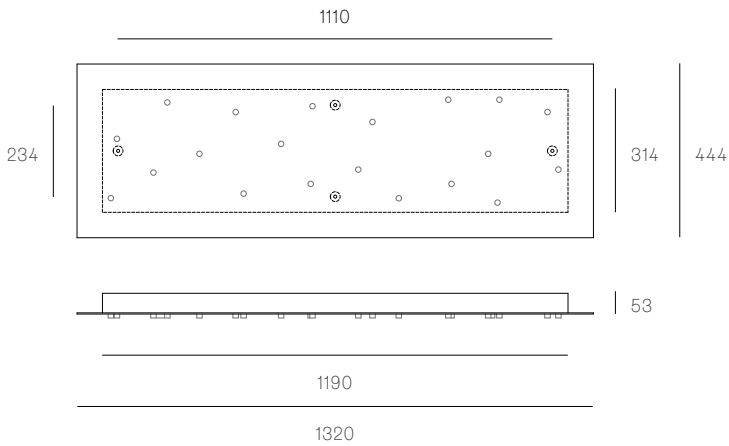


XX.20 ROUND
SPECIFICATION

Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø609 x 16

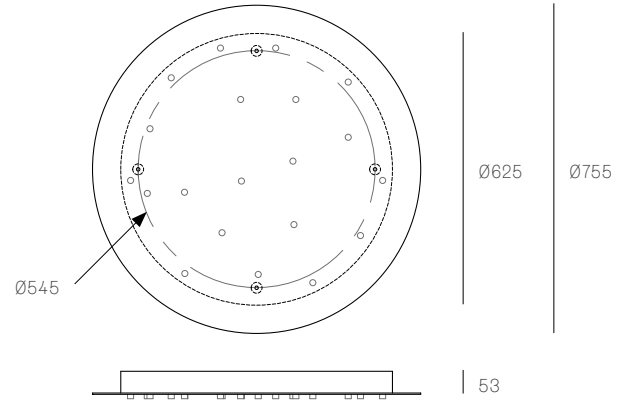


73.20 SQUARE
SPECIFICATION

Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

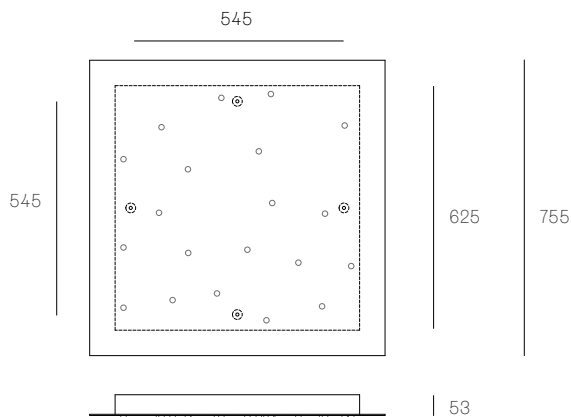

XXX.21 RECTANGLE
SPECIFICATION


Pendants	Twenty-one
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 135 x 16

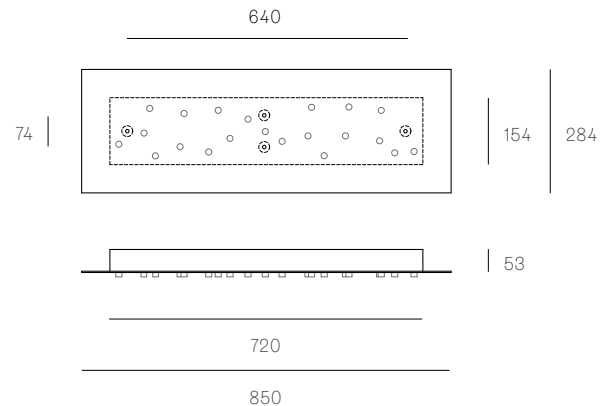

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.26 RECTANGLE
SPECIFICATION

Pendants	Twenty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	854 x 189 x 16

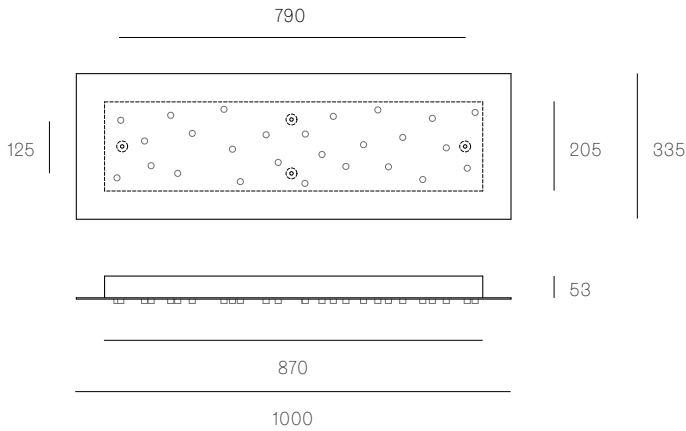


XXX.26 ROUND
SPECIFICATION

Pendants	Twenty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø454 x 16

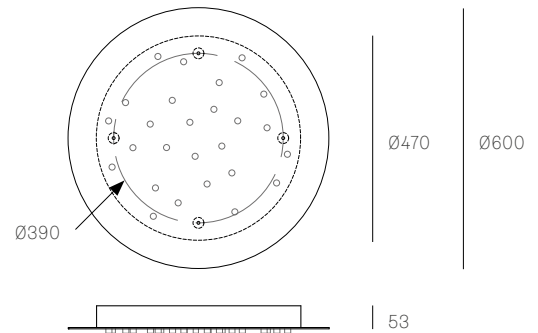


XXX.26 SQUARE
SPECIFICATION

Pendants	Twenty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	454 x 454 x 16

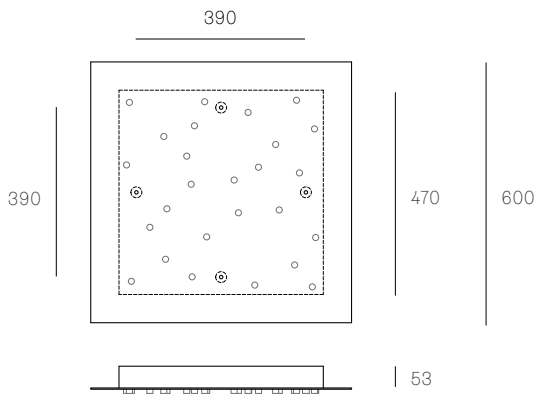

XXX.28 RECTANGLE
SPECIFICATION


Pendants	Twenty-eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1174 x 298 x 16

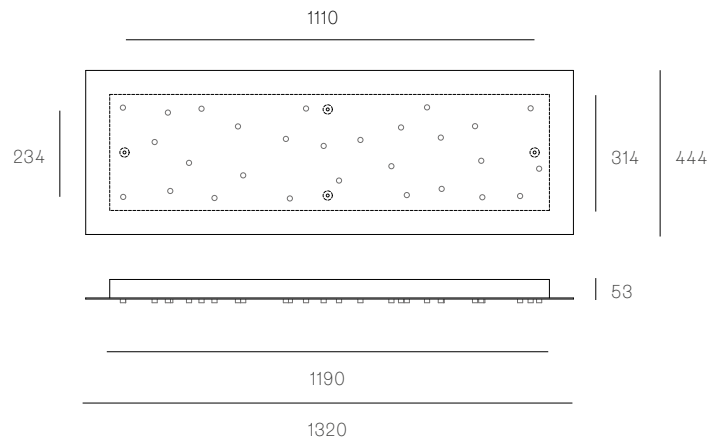

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.28 SQUARE
SPECIFICATION

Pendants	Twenty-eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

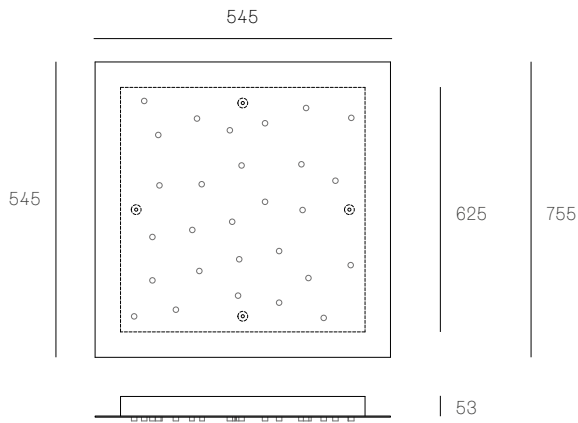


XXX.36 RECTANGLE
SPECIFICATION

Pendants	Thirty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	954 x 224 x 16

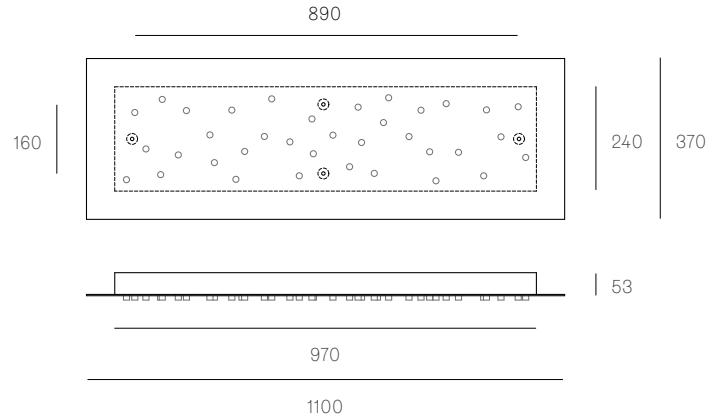


XXX.36 ROUND
SPECIFICATION

Pendants	Thirty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø609 x 16

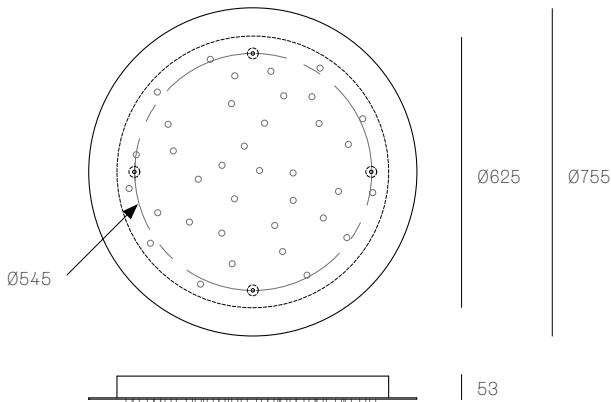

XXX.36 SQUARE
SPECIFICATION


Pendants	Thirty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

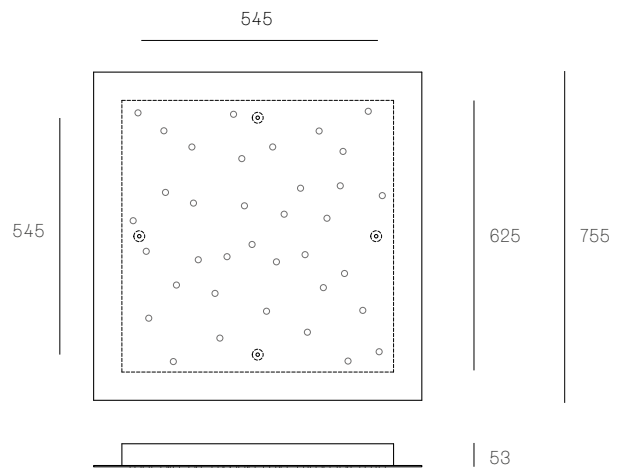

All dimensions are in millimeters (mm) unless otherwise specified.

XXX.50 SQUARE
SPECIFICATION


Pendants	Fifty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

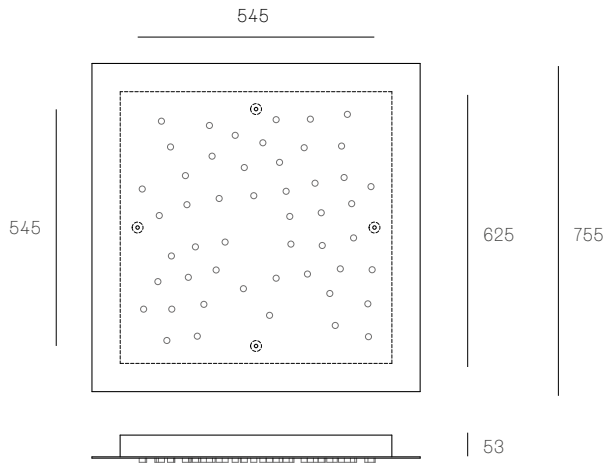

All dimensions are in millimeters (mm)
unless otherwise specified.


XXX.1
SPECIFICATION

Pendant	One
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral Remote for select markets only

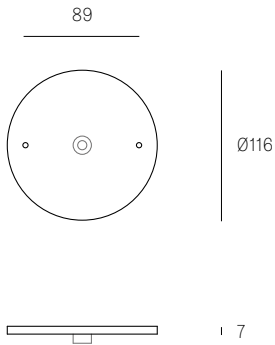


XXX.1 DEEP
SPECIFICATION

Pendant	One
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

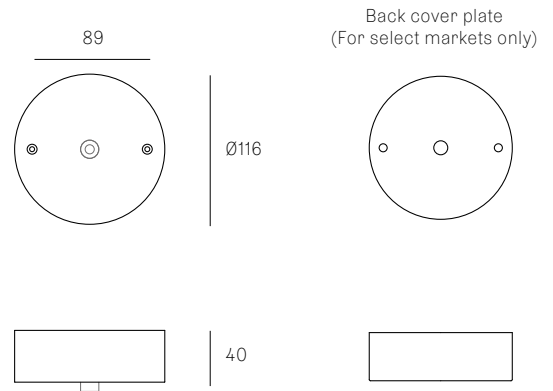


XXX.1M
SPECIFICATION

Pendant	One
Materials	Brushed nickel or white powder coated zinc cover
Cable	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote



XXX.1MI
SPECIFICATION


Pendant	One
Material	White polyurethane
Cable	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote



All dimensions are in millimeters (mm) unless otherwise specified.


XXX.1M0
SPECIFICATION

Pendant	One
Material	White polyurethane
Cable	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote




XXX.3
SPECIFICATION

Pendants	Three
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

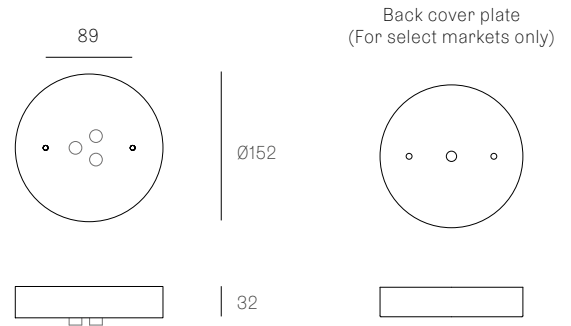

XXX.7
SPECIFICATION


Pendants	Seven
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

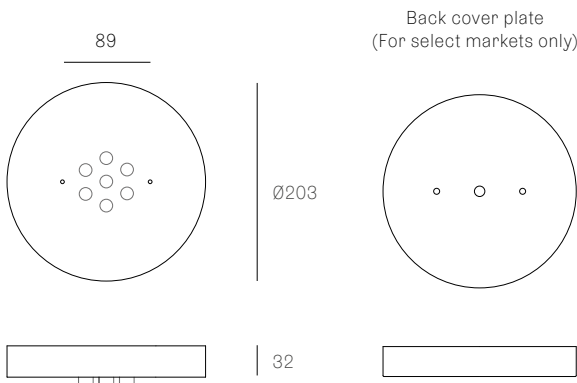

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.13
SPECIFICATION

Pendants	Thirteen
Material	White powder coated stainless steel cover
Cable	Sculptural cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø250 x 16

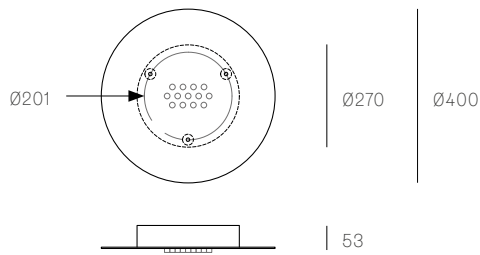


XXX.19
SPECIFICATION

Pendants	Nineteen
Material	White powder coated stainless steel cover
Cable	Sculptural cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø355 x 16

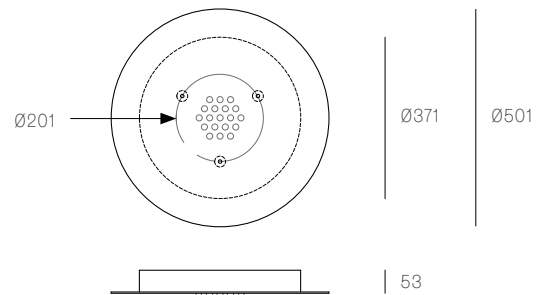


XXX.37
SPECIFICATION

Pendants	Thirty-seven
Material	White powder coated stainless steel cover
Cable	Sculptural cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø454 x 16

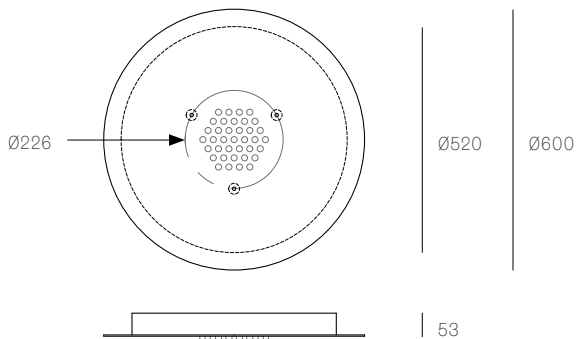

XXX.61
SPECIFICATION


Pendants	Sixty-one
Material	White powder coated stainless steel cover
Cable	Sculptural cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø561 x 16

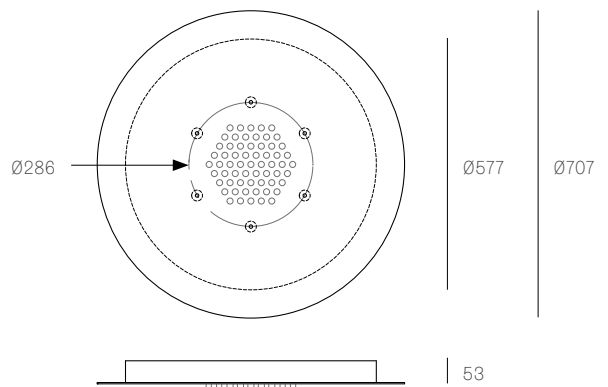

All dimensions are in millimeters (mm) unless otherwise specified.


XXXS
SPECIFICATION

Pendant One
Material White powder coated stainless steel cover
Power Supply Remote

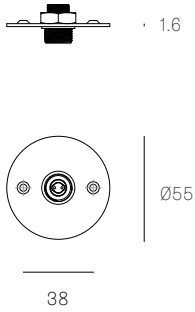


XXXSP
SPECIFICATION

Pendant One
Material White powder coated stainless steel cover
Power Supply Integral
 Remote for select markets only

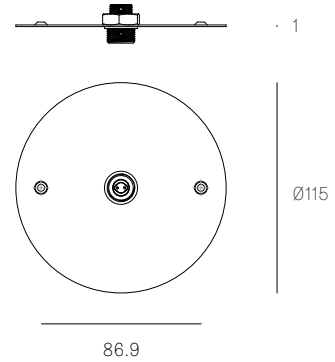


76S
SPECIFICATION

Pendant One
Material White powder coated stainless steel cover
Power Supply Remote

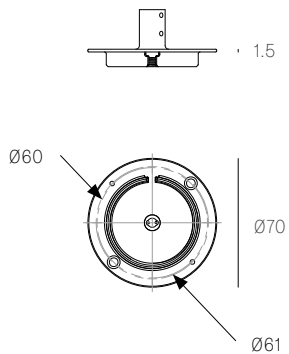

76SP
SPECIFICATION


Pendant One
Material White powder coated stainless steel cover
Power Supply Integral
 Remote for select markets only

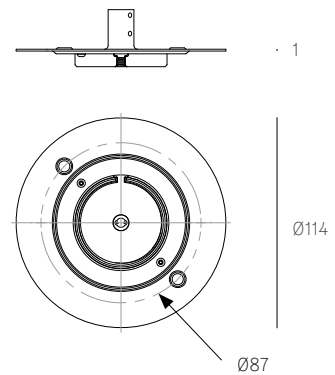

All dimensions are in millimeters (mm) unless otherwise specified.

XXXS BRASS
SPECIFICATION


Pendant	One
Material	Brass base
Power Supply	Remote



All dimensions are in millimeters (mm)
unless otherwise specified.


XXXT
SPECIFICATION

- Pendant** One
- Material** Brass base and dial control
- Cable** Black flexible cord, 2290mm
- Plug Type** Type A - 110V
Type C - 230V
Type G - 230V
Type I - 230V

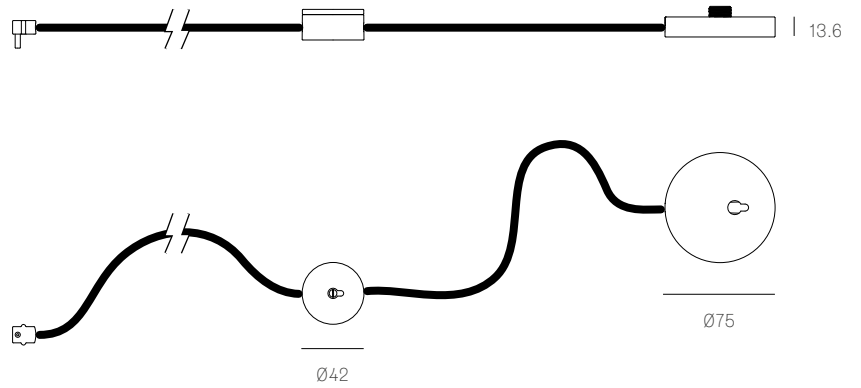

44T
SPECIFICATION

- Pendant** One
- Material** Black base and dial control
- Cable** Black flexible cord, 2290mm
- Plug Type** Type A - 110V
Type C - 230V
Type G - 230V
Type I - 230V

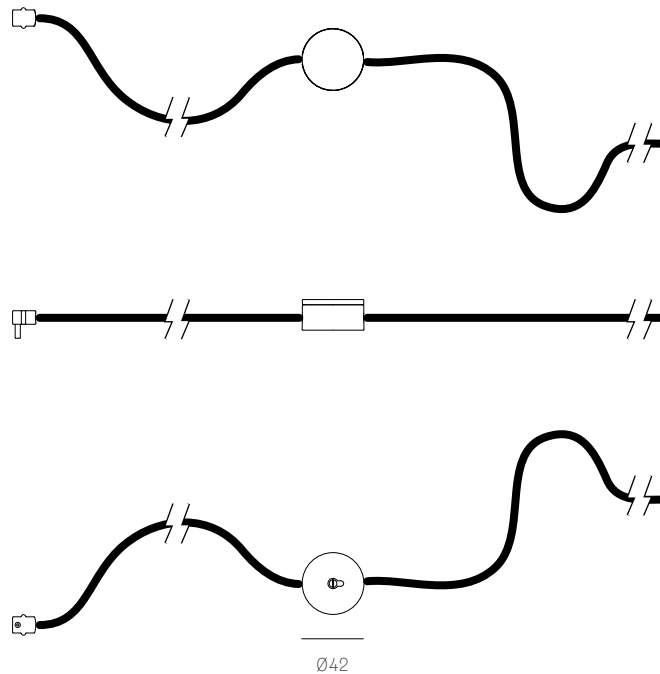

All dimensions are in millimeters (mm) unless otherwise specified.