

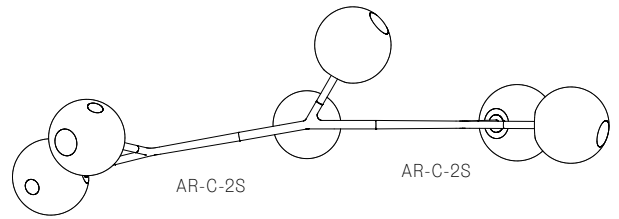
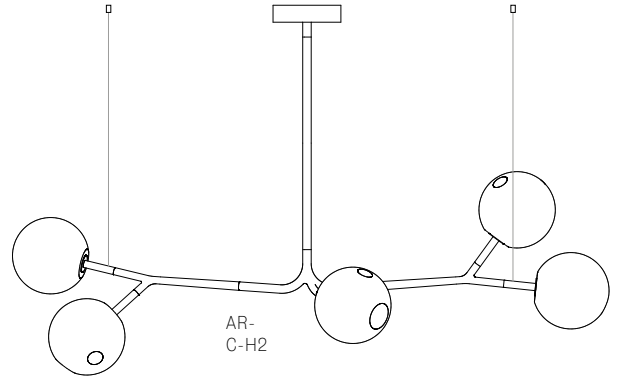
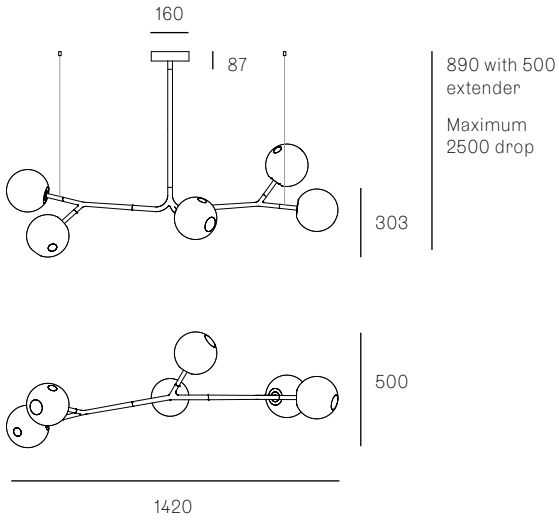
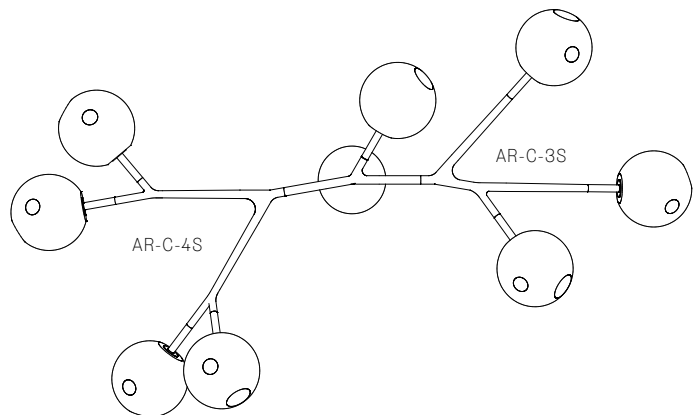


**28.5A.1**

All dimensions are in millimeters (mm) unless otherwise specified.

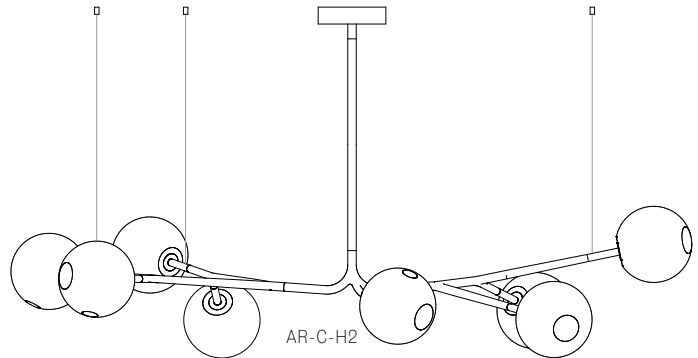


**28.8A.1**

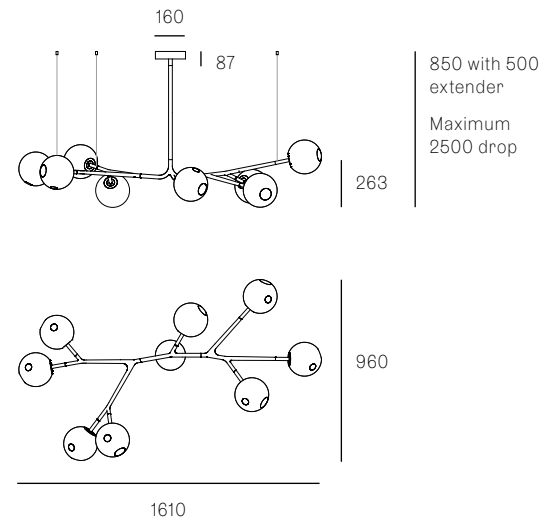

**28.8A.2**


All dimensions are in millimeters (mm) unless otherwise specified.

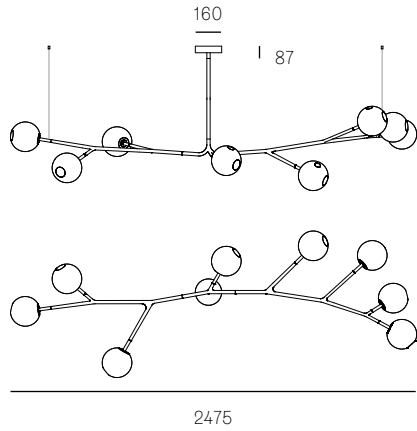


900 with 500 extender  
Maximum 2500 drop

313

905

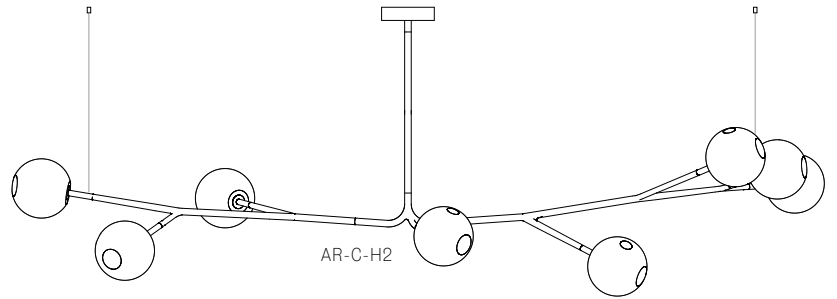


AR-C-H2

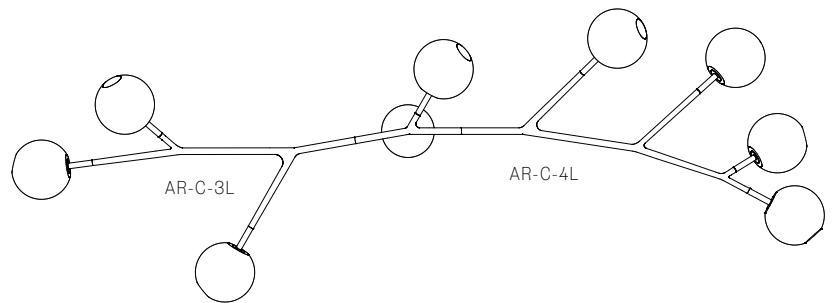

AR-C-3L

AR-C-4L

**28.9A.1**

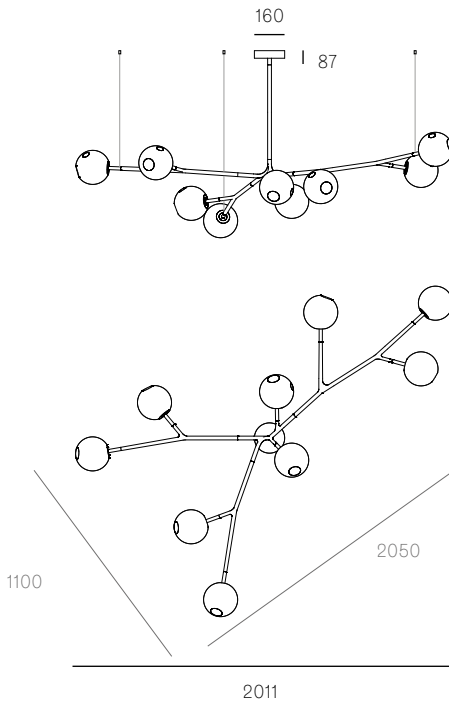

1047 with 500 extender  
Maximum 2500 drop


460

1732

1100

2050

2011

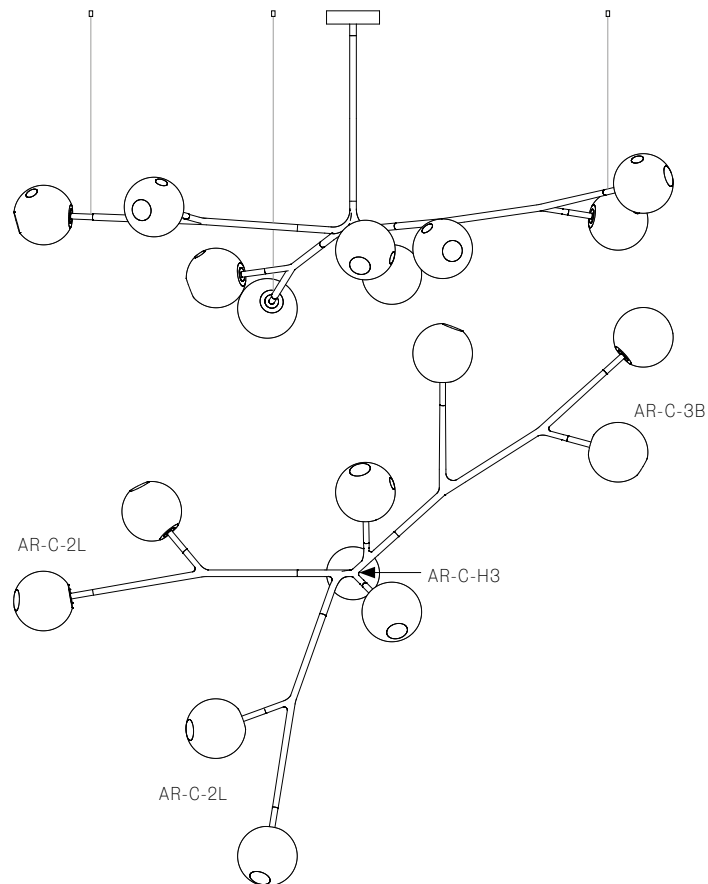

AR-C-2L



AR-C-3B

AR-C-H3



AR-C-2L

**28.9A.2**

All dimensions are in millimeters (mm) unless otherwise specified.

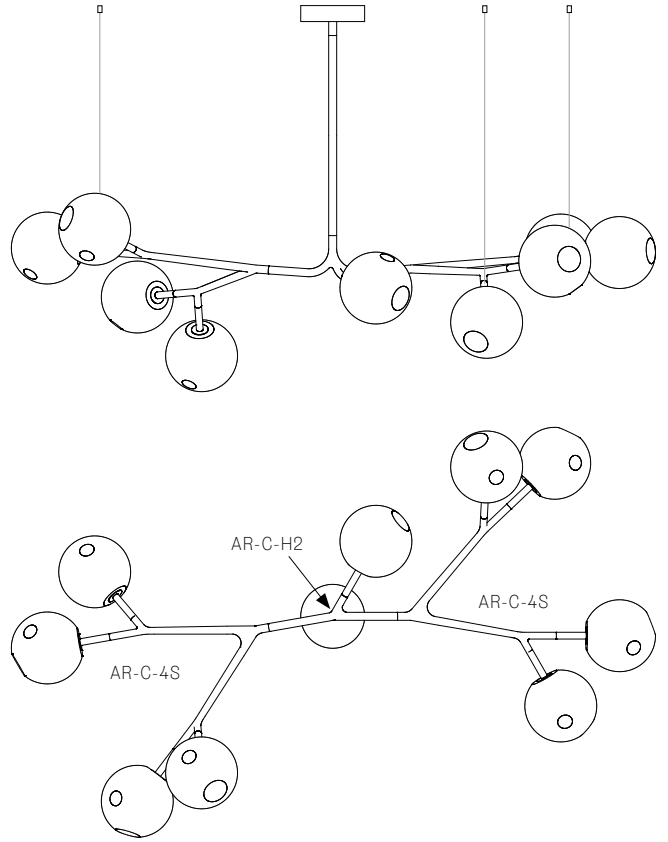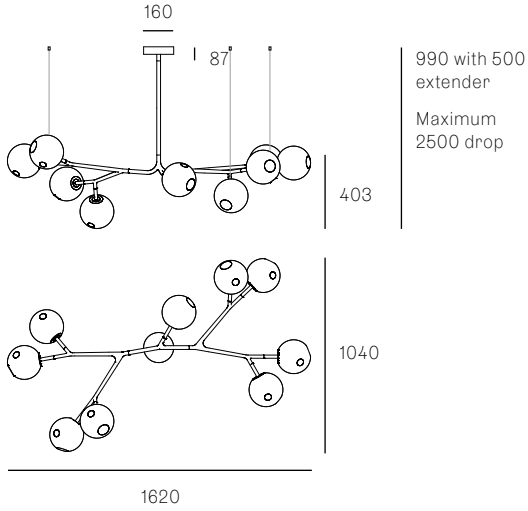


**28.11A.1**

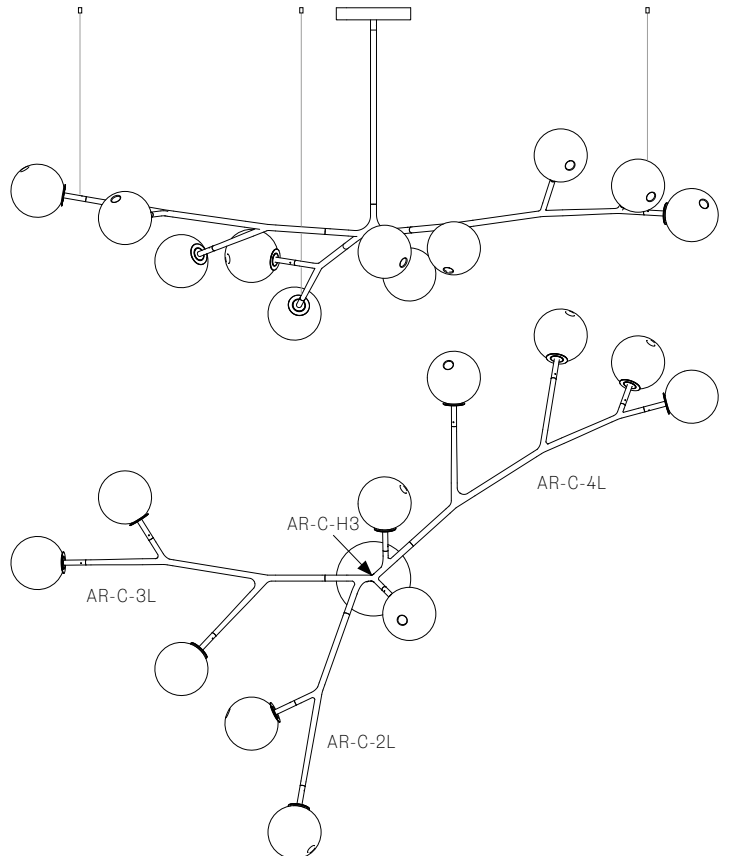
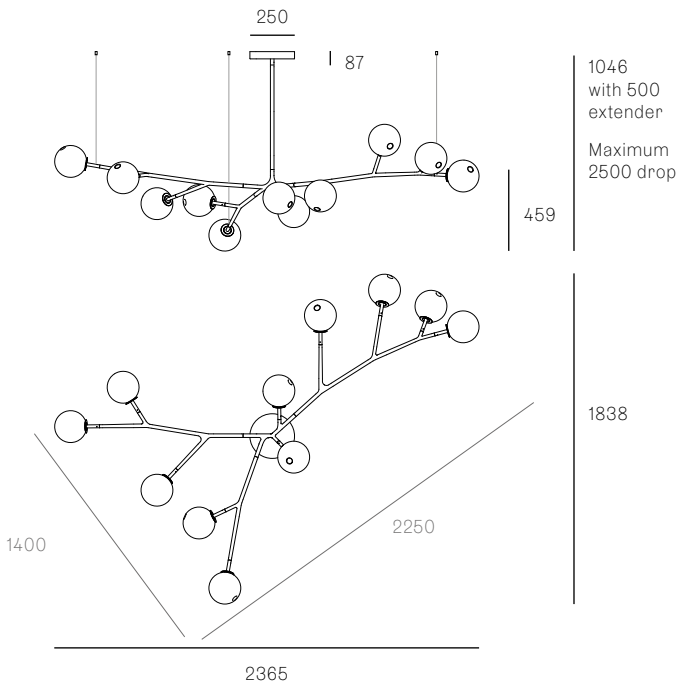


28.11A.2


All dimensions are in millimeters (mm) unless otherwise specified.

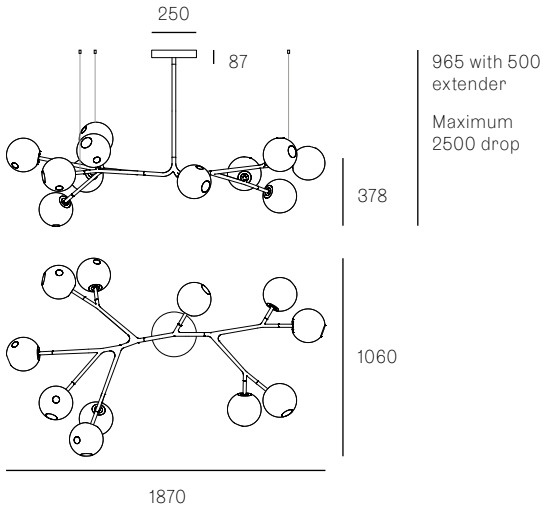



965 with 500 extender  
Maximum 2500 drop

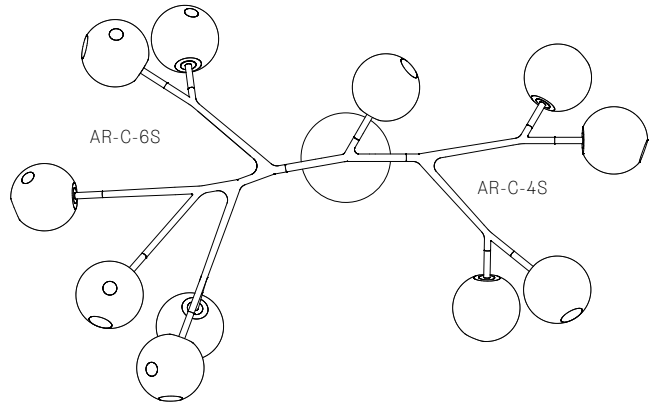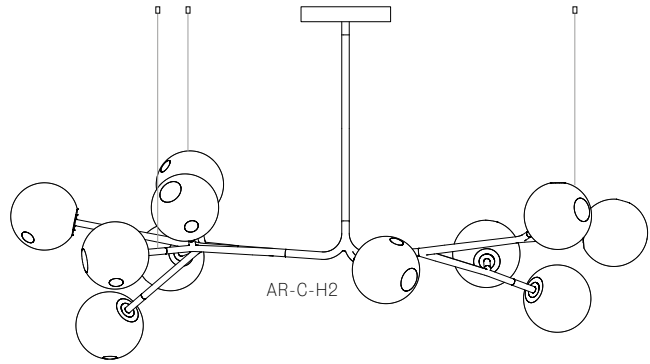

28.13A.1


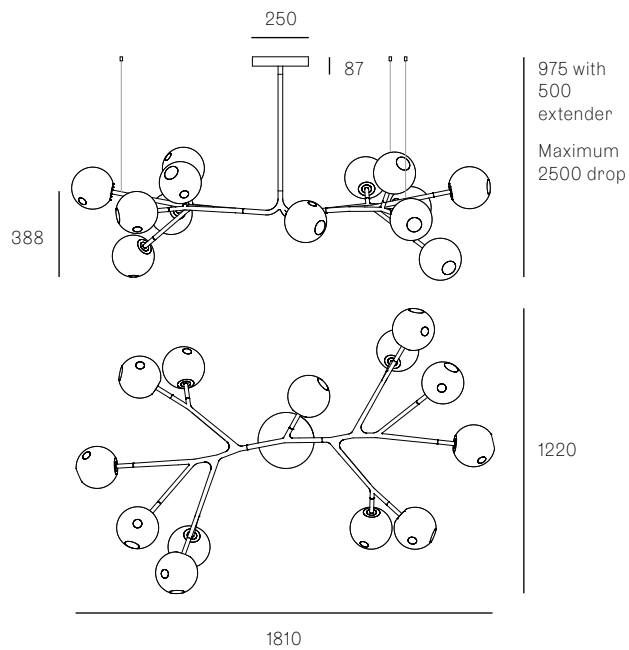


975 with 500 extender  
Maximum 2500 drop

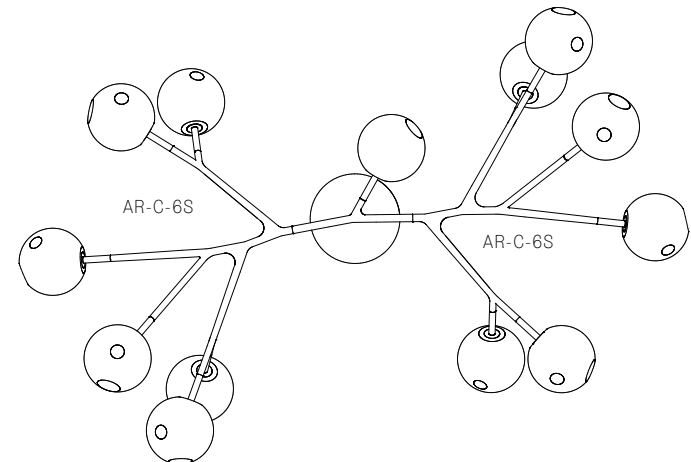
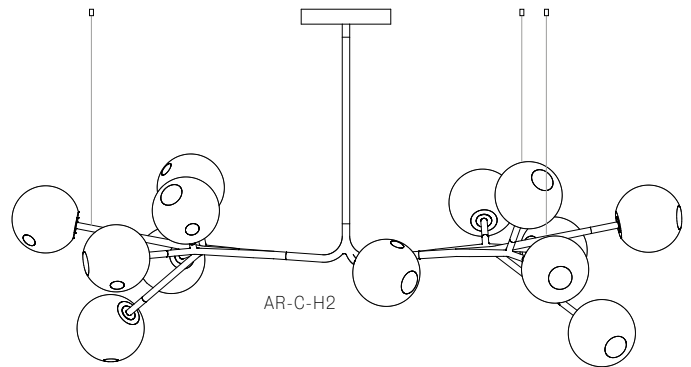


**28.17A.1**

All dimensions are in millimeters (mm) unless otherwise specified.

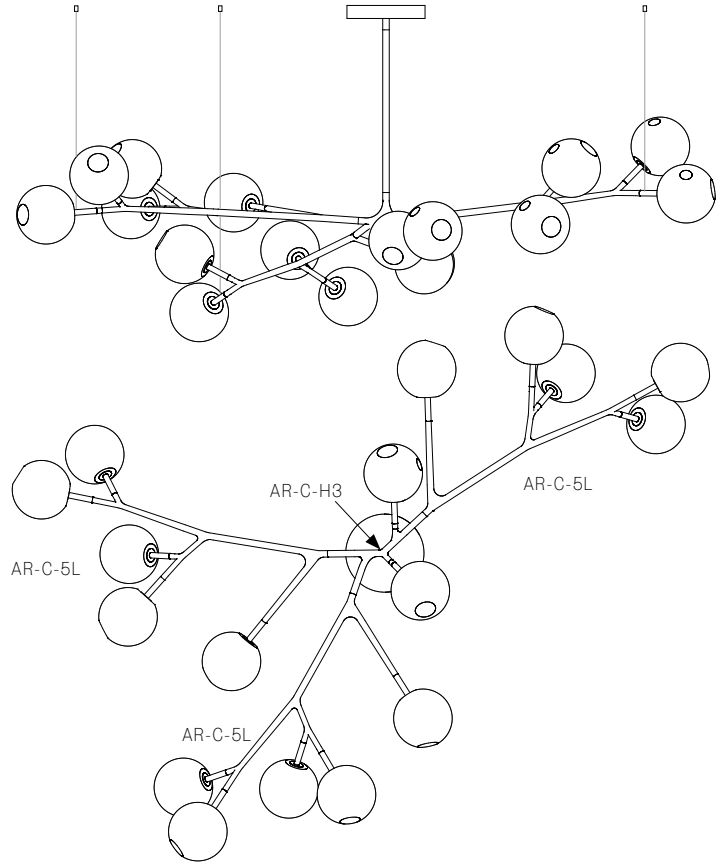
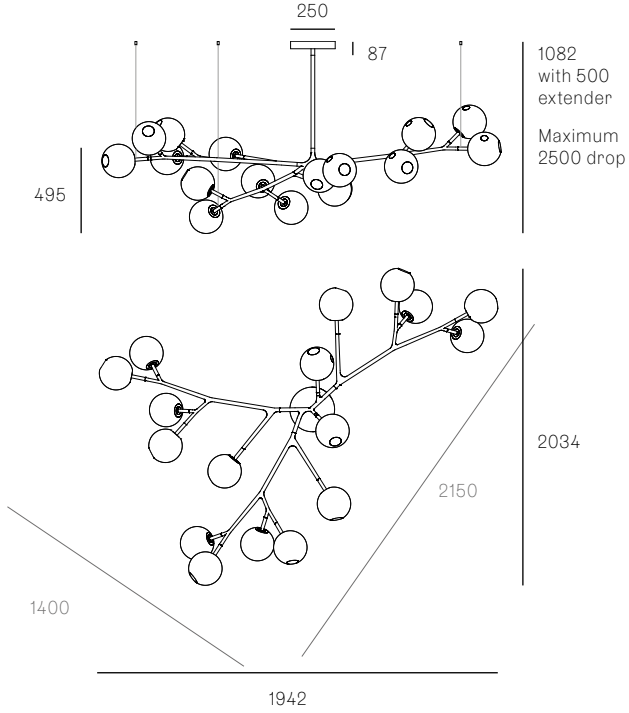


**28.20A.1**

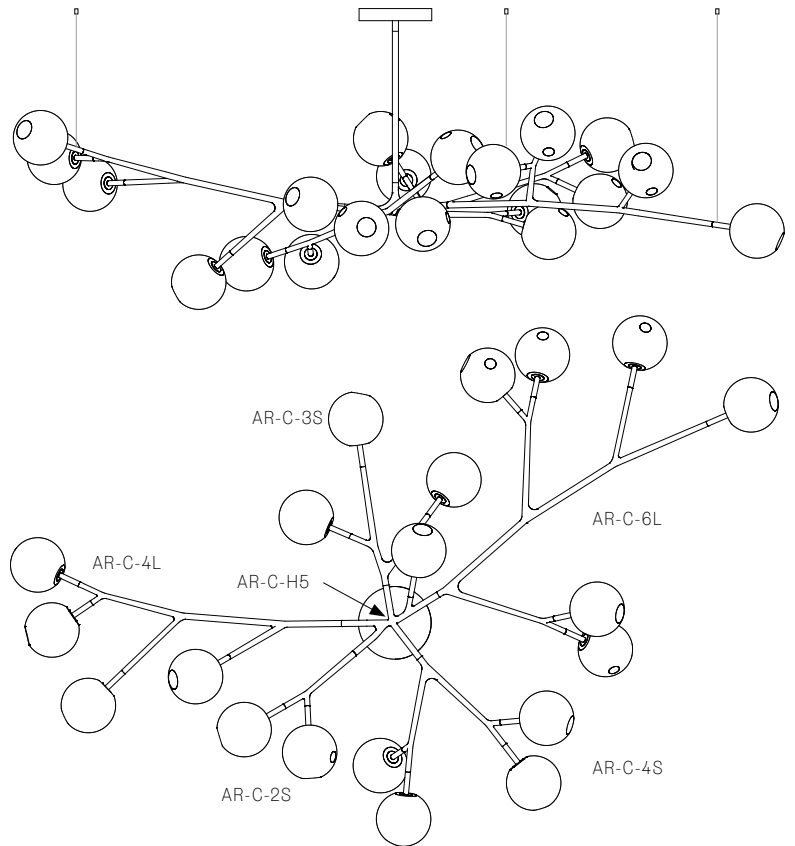
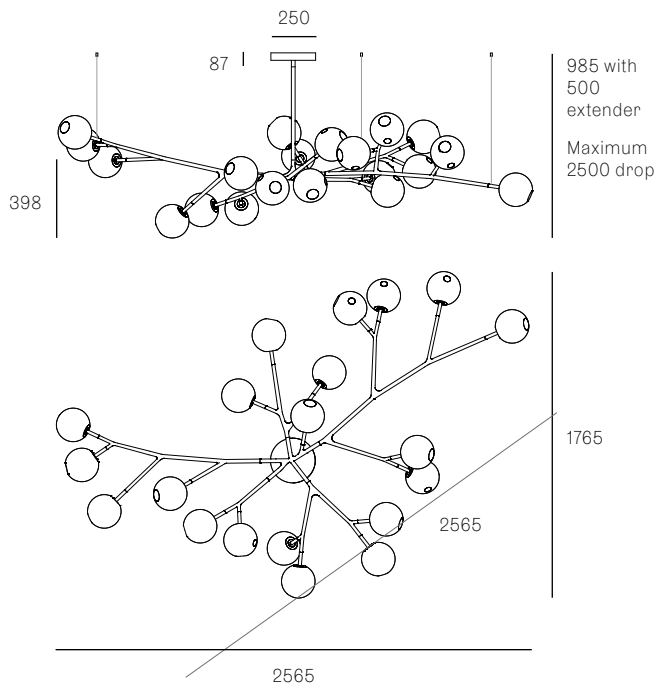


**28.23A.1**

All dimensions are in millimeters (mm) unless otherwise specified.

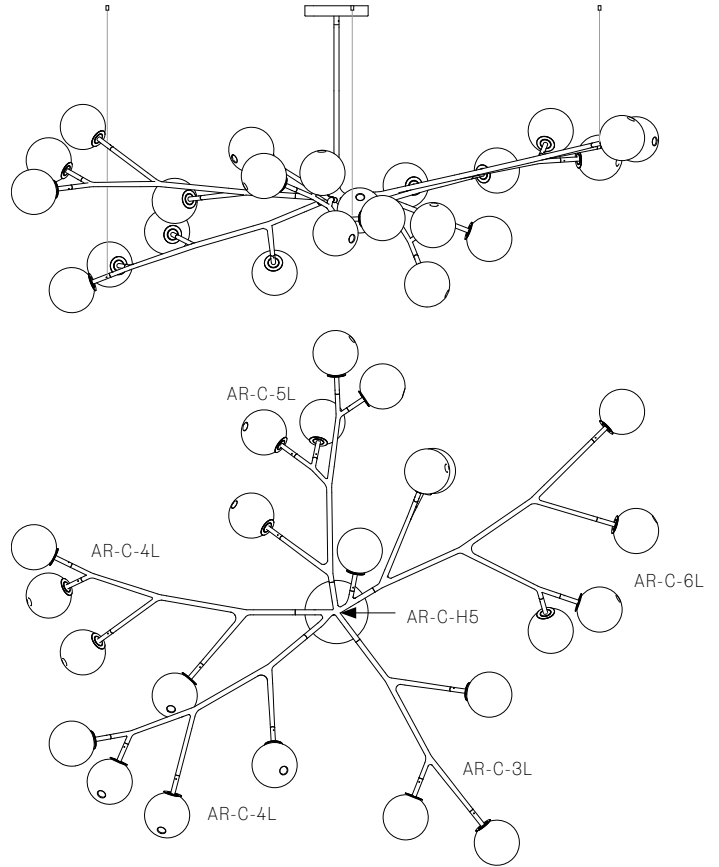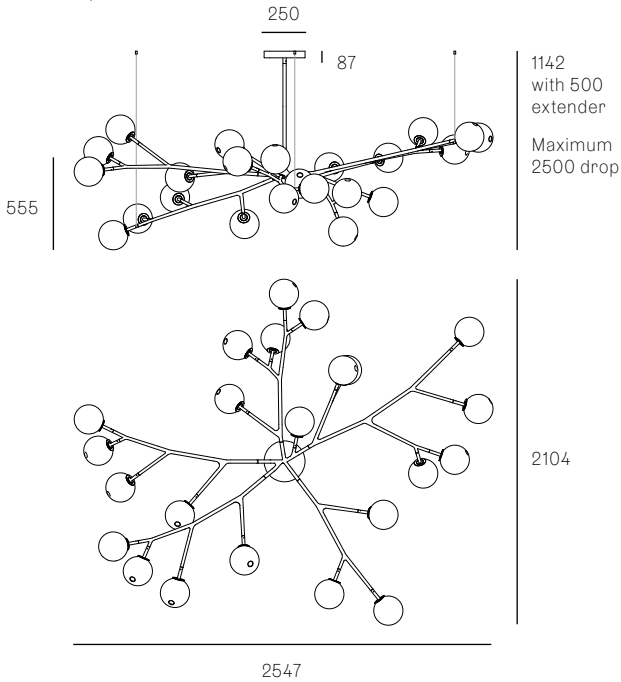


**28.33A.1**

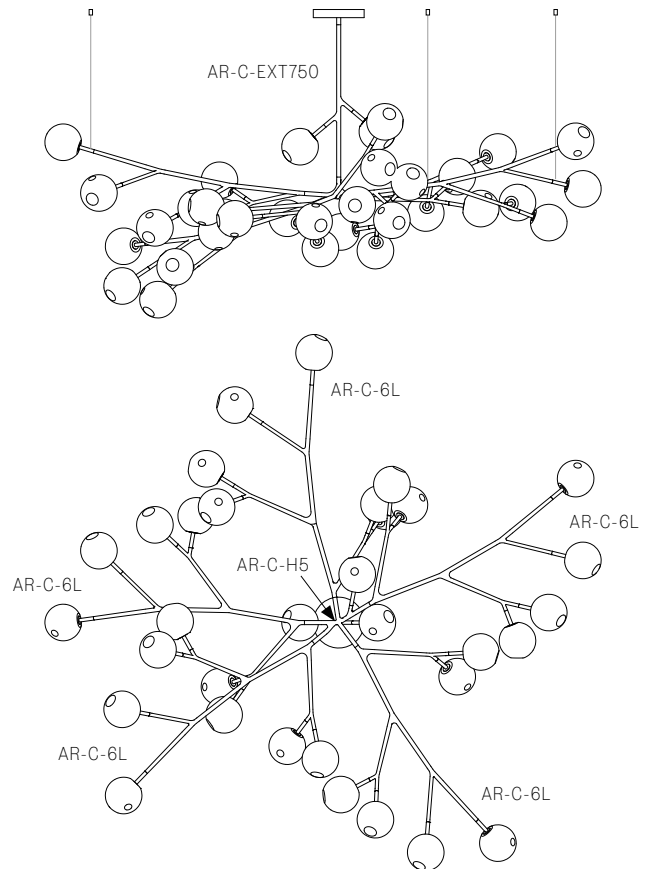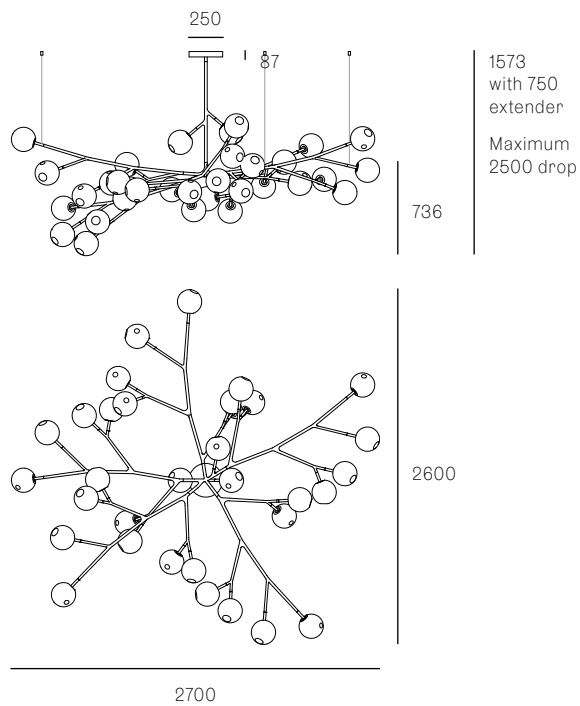

**XXX.5 - XXX.9A**  
SPECIFICATION

**Materials** Black powder coated stainless steel cover


**Power Supply** Integral  
Bocci recommends remote mounting power supplies for ease of long-term maintenance.

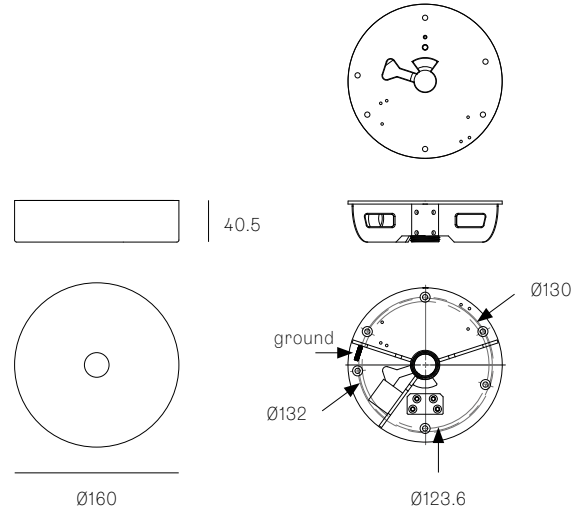

**XXX.11A - XXX.33A**  
SPECIFICATION

**Materials** Black powder coated stainless steel cover

**Power Supply** Integral  
Bocci recommends remote mounting power supplies for ease of long-term maintenance.

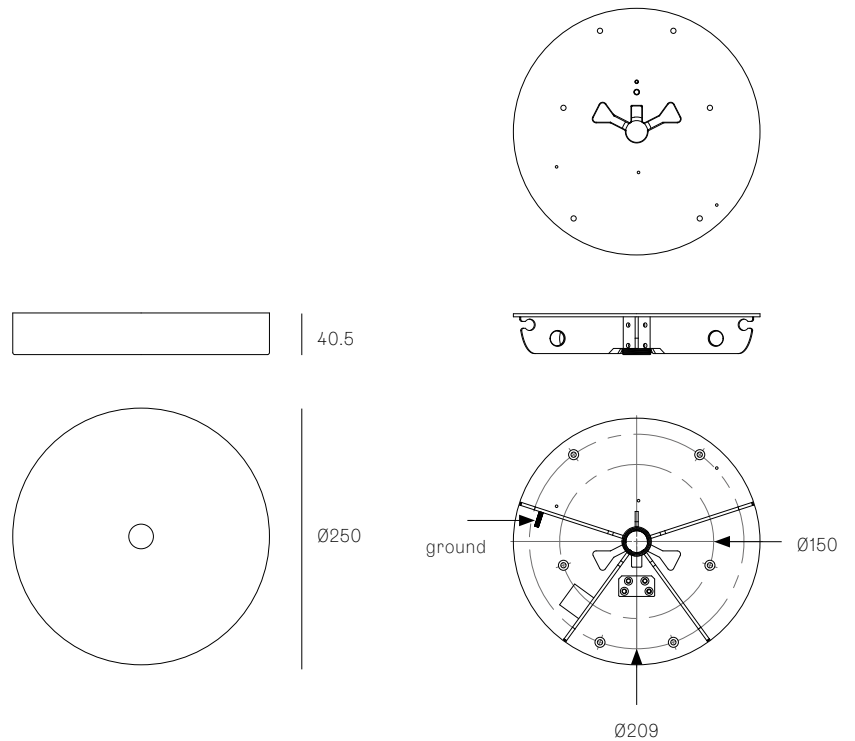

All dimensions are in millimeters (mm) unless otherwise specified.