

± Ø165mm

Image shown above 28.3 with round canopy

<b>Series</b>	28
<b>Mounting</b>	Ceiling mounted
<b>Glass Colours</b>	Clear, colour pendants
<b>Lamp</b>	1.5W LED, 2500K, 130lm 20W Xenon, 2600K, 196lm
<b>Sculptural Cable</b>	3000mm standard / up to 30500mm maximum Adjustable length: 28.1 - 28.7 Non-adjustable Length: 28.13 - 28.61
<b>Cable Finishes</b>	Black or nickel
<b>Canopy Finishes</b>	28.1 - 28.7: white, black or brushed nickel canopy 28.1mi/mo: white polyurethane canopy 28.13 - 28.61: white canopy
<b>Materials</b>	Blown glass, braided metal cable, electrical components, steel canopy
<b>Power Supply</b>	Integral Remote mounted for 28.1m/mo/mi  Bocci recommends remote mounting power supplies for ease of long-term maintenance.
<b>Environment</b>	Indoor, dry location. IP30
<b>Note</b>	Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible.  Pendant anchor kit included.  Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
<b>Patent #</b>	CAN 134238 US D687,740 EU 001695834-001 to 004

**Certifications**



**Weight (kg)**




Round

<b>28.1</b>	1.8
<b>28.3</b>	4.3
<b>28.7</b>	9.8
<b>28.13</b>	22
<b>28.19</b>	60.8
<b>28.37</b>	112
<b>28.61</b>	182

**Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:**


- Multiple single pendant fixtures should be wired in parallel, DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

ADJUSTABLE LENGTH

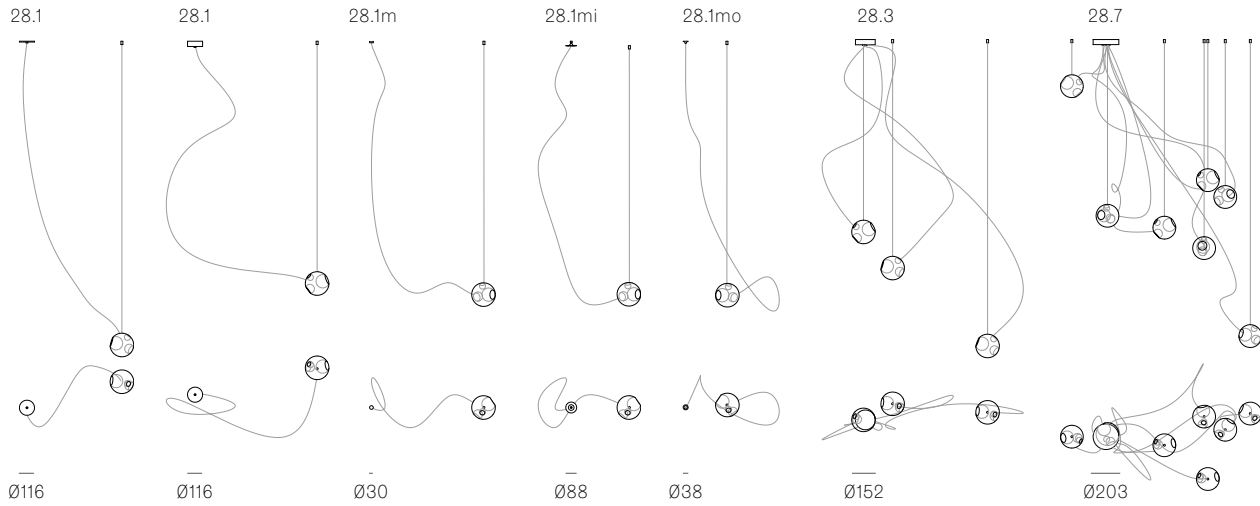

up to 3000 standard  
up to 30500 custom

NON-ADJUSTABLE LENGTH

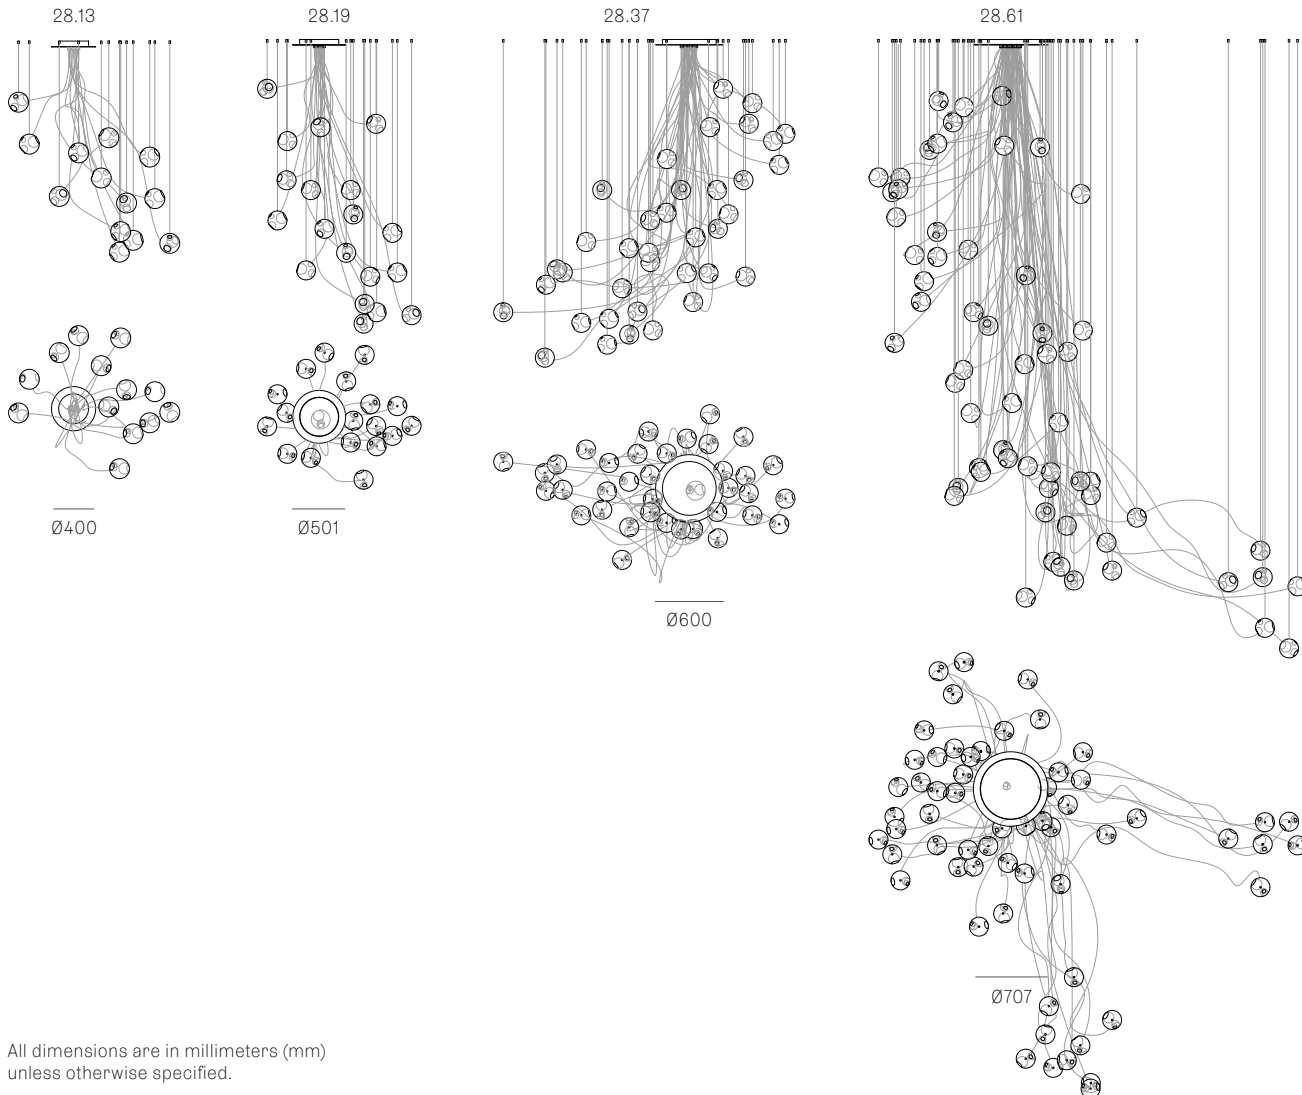


up to 3000 standard  
up to 30500 custom

All dimensions are in millimeters (mm) unless otherwise specified.


**XXX.1**  
SPECIFICATION

<b>Pendant</b>	One
<b>Materials</b>	Brushed nickel, white or black powder coated stainless steel cover
<b>Cable</b>	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral Remote for select markets only




**XXX.1 DEEP**  
SPECIFICATION

<b>Pendant</b>	One
<b>Materials</b>	Brushed nickel, white or black powder coated stainless steel cover
<b>Cable</b>	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral

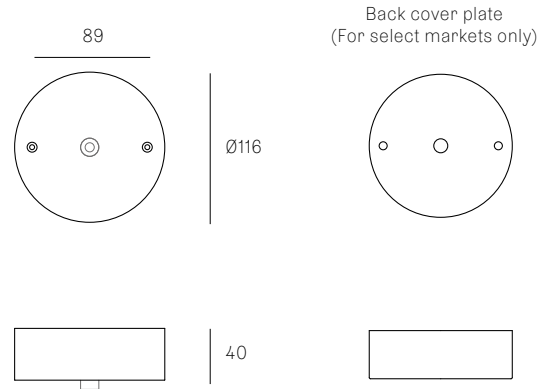


**XXX.1M**  
SPECIFICATION

<b>Pendant</b>	One
<b>Materials</b>	Brushed nickel or white powder coated zinc cover
<b>Cable</b>	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Remote



**XXX.1MI**  
SPECIFICATION


<b>Pendant</b>	One
<b>Material</b>	White polyurethane
<b>Cable</b>	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Remote



All dimensions are in millimeters (mm) unless otherwise specified.


**XXX.1M0**  
SPECIFICATION

<b>Pendant</b>	One
<b>Material</b>	White polyurethane
<b>Cable</b>	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Remote




**XXX.3**  
SPECIFICATION

<b>Pendants</b>	Three
<b>Materials</b>	Brushed nickel, white or black powder coated stainless steel cover
<b>Cable</b>	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral

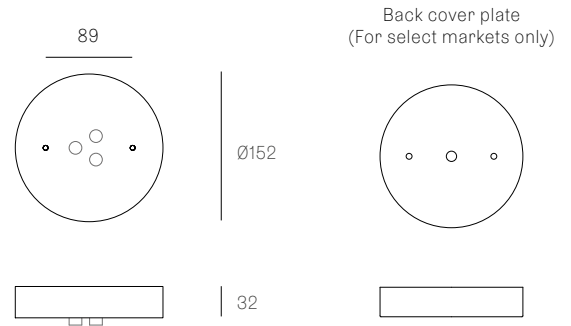

**XXX.7**  
SPECIFICATION


<b>Pendants</b>	Seven
<b>Materials</b>	Brushed nickel, white or black powder coated stainless steel cover
<b>Cable</b>	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral

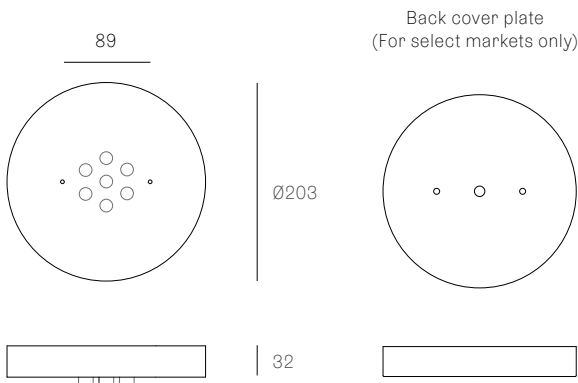

All dimensions are in millimeters (mm) unless otherwise specified.


**XXX.13**  
SPECIFICATION

<b>Pendants</b>	Thirteen
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Sculptural cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	Ø250 x 16

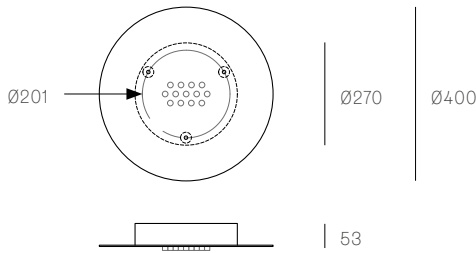


**XXX.19**  
SPECIFICATION

<b>Pendants</b>	Nineteen
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Sculptural cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	Ø355 x 16

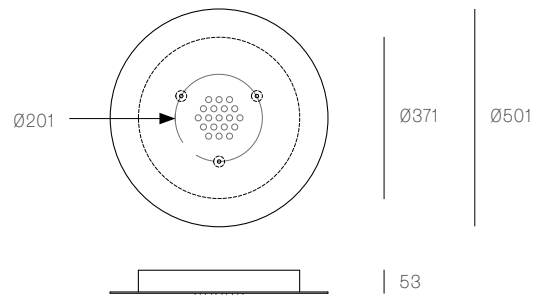


**XXX.37**  
SPECIFICATION

<b>Pendants</b>	Thirty-seven
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Sculptural cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	Ø454 x 16

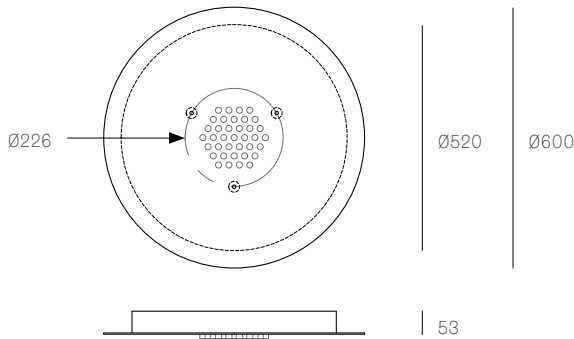

**XXX.61**  
SPECIFICATION

<b>Pendants</b>	Sixty-one
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Sculptural cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	Ø561 x 16

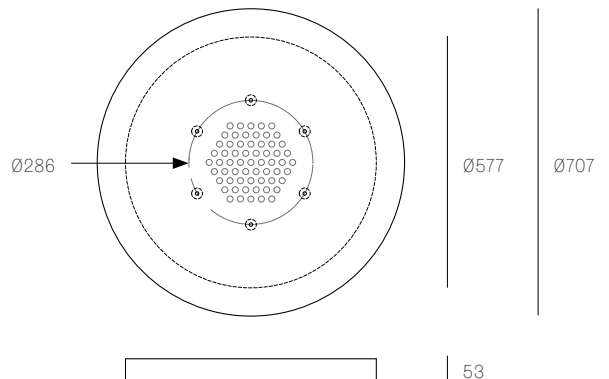

All dimensions are in millimeters (mm) unless otherwise specified.