

Image shown above 28.6 Ceiling Mounted

Series 28, 38V, 57, 73, 84, 84V

Mounting Ceiling mounted

**Glass Colours** 28: Clear, colour pendants

38V: Clear

57: Grey, white, light mirror, dark mirror

73: Clear, grey 1, grey 2, grey 3

84: Clear/copper 84V: Clear/copper

Lamp 1.5W LED, 2500K, 130Im

Stem Lengths 900mm, 1800mm, 2700mm, 3700mm long stem

Additional extender available in 153mm, 305mm, 914mm, Extenders

**Finishes** Brass or black powder coated stem

Brass or matte black canopy

Materials Blown glass, brass stem, electrical components

**Power Supply** Integral, except for XXX.12 stem

Bocci recommends remote mounting power supplies for ease

of long-term maintenance.

**Environment** Indoor, dry location. IP20

The brass used in our Stem Series is untreated and, as such, Note will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please

use the gloves provided in your shipment.

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are

individual, irregular expressions of our research.

Patent #

28: US D687,740

EU 001695834-001 to 004

38V: EU 002071019-001

57: US D796732

EU 002268581-0001 to 0006

73: US D762,323 S

EU 002633230-0001 - 0003

84: EU 003611144-0001 to 0004

Certifications



CB C € 點 趣






#### Weight (kg)

|  |     | XXX.3<br>(900mm) | XXX.3<br>(1800mm) | XXX.6<br>(1800mm) | XXX.9<br>(2700mm) | XXX.12<br>(3700mm) |
|--|-----|------------------|-------------------|-------------------|-------------------|--------------------|
|  | 28  | 4.7              | 5.7               | 9.4               | 15.1              | 18.8               |
|  | 38V | 7.1              | 8.2               | 14.3              | 22.5              | 28.6               |
|  | 57  | 5.2              | 6.3               | 10.5              | 16.7              | 21                 |
|  | 73  | 6.2              | 8.9               | 15.7              | 25.5              | 36.8               |
|  | 84  | 6.5              | 7.5               | 12.9              | 20.4              | 25.9               |
|  | 84V | 7.4              | 8.4               | 14.8              | 23.3              | 29.7               |










Ø190 - 215









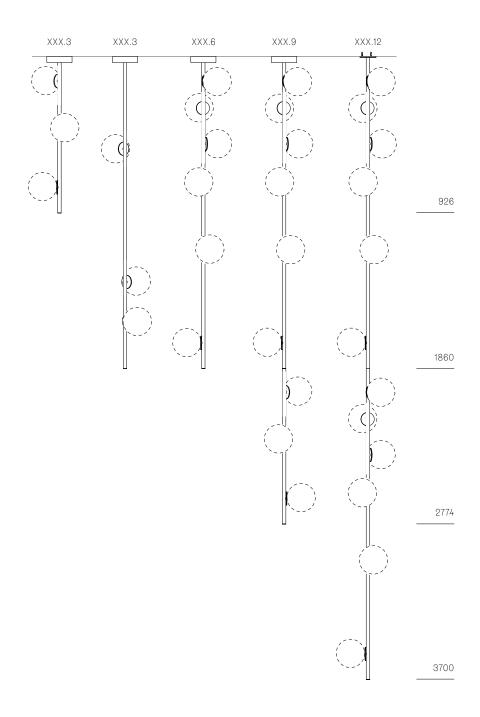

All dimensions are in millimeters (mm) unless otherwise specified.




### **XXX.3 - XXX.9 CEILING MOUNTED**

SPECIFICATION

Materials Brass or black stainless steel cover

**Power Supply** Integral

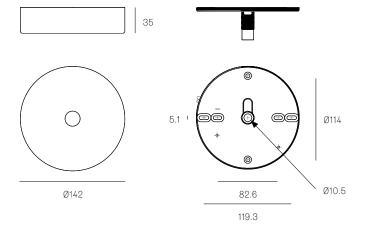


### **XXX.12 CEILING MOUNTED**

SPECIFICATION

Materials Brass, black, or white powder coated stainless

steel cover

**Power Supply** Remote




# XXX.3 - XXX.6 CABLE SUSPENDED

**SPECIFICATION** 

Black or white powder coated stainless steel Materials

**Coaxial Cable** Adjustable. 3000mm, 6000mm, or 15000mm

**Power Supply** Integral



All dimensions are in millimeters (mm) unless otherwise specified.

## XXX.3 - XXX.6 FLOOR

SPECIFICATION

Materials Brass or black powder coated base

Cable Black flexible cord, 2290mm

**Plug Type** Type A - 110V

Type C - 230V Type G - 230V

Type I - 230V

