

± Ø165mm

Image shown above 28.5 with round canopy

<b>Series</b>	28
<b>Mounting</b>	Ceiling mounted
<b>Glass Colours</b>	Clear, colour pendants
<b>Lamp</b>	1.5W LED, 2500K, 130lm 20W Xenon, 2600K, 196lm
<b>Coaxial Length</b>	3000mm standard / up to 30500mm maximum Adjustable length: 28.1 - 28.9 Non-adjustable length: 28.11 - 28.28
<b>Canopy Finishes</b>	28.1 - 28.7: white, black or brushed nickel canopy 28.1mi/mo: white polyurethane canopy 28.9 - 28.28: white canopy
<b>Materials</b>	Blown glass, braided metal coaxial cable, electrical components, steel canopy
<b>Power Supply</b>	Integral Remote mounted for 28.1m/mo/mi  Bocci recommends remote mounting power supplies for ease of long-term maintenance.
<b>Environment</b>	Indoor, dry location. IP30
<b>Note</b>	Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible.  Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
<b>Patent #</b>	CAN 134238 US D687,740 EU 001695834-001 to 004

**Weight (kg)**



Round

<b>28.1</b>	1.3
<b>28.3</b>	3.5
<b>28.5</b>	6
<b>28.7</b>	8
<b>28.11</b>	29
<b>28.20</b>	52



Square

<b>28.11</b>	29
<b>28.16</b>	39.5
<b>28.28</b>	65




Rectangle

<b>28.9</b>	16
<b>28.11</b>	28
<b>28.16</b>	38
<b>28.20</b>	52
<b>28.28</b>	66.8

**Certifications**




**ADJUSTABLE LENGTH**

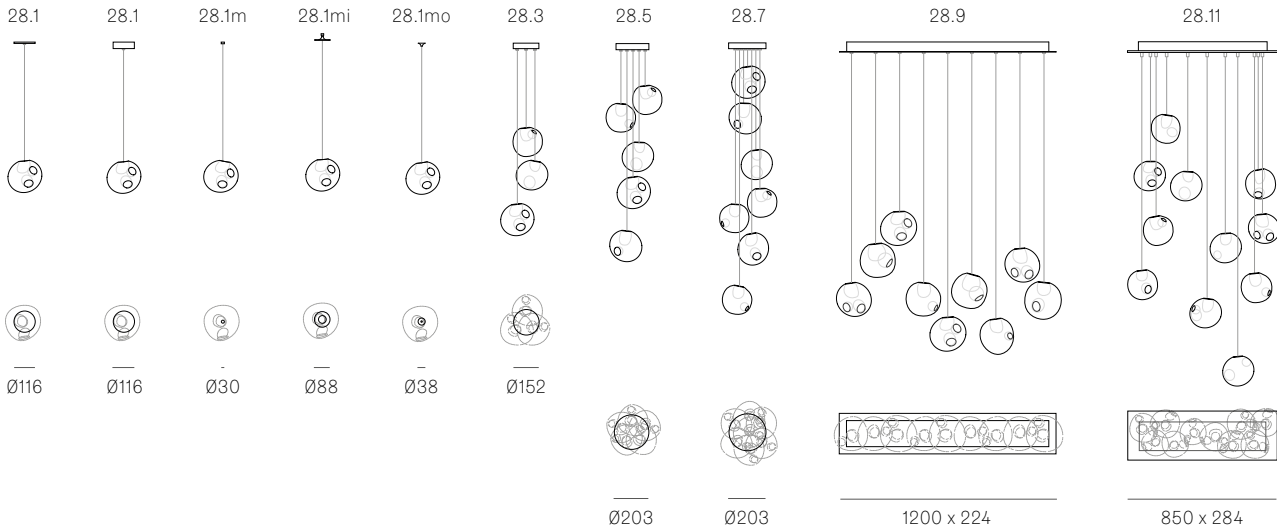

up to 3000  
standard  
up to 30500  
custom

**NON-ADJUSTABLE LENGTH**

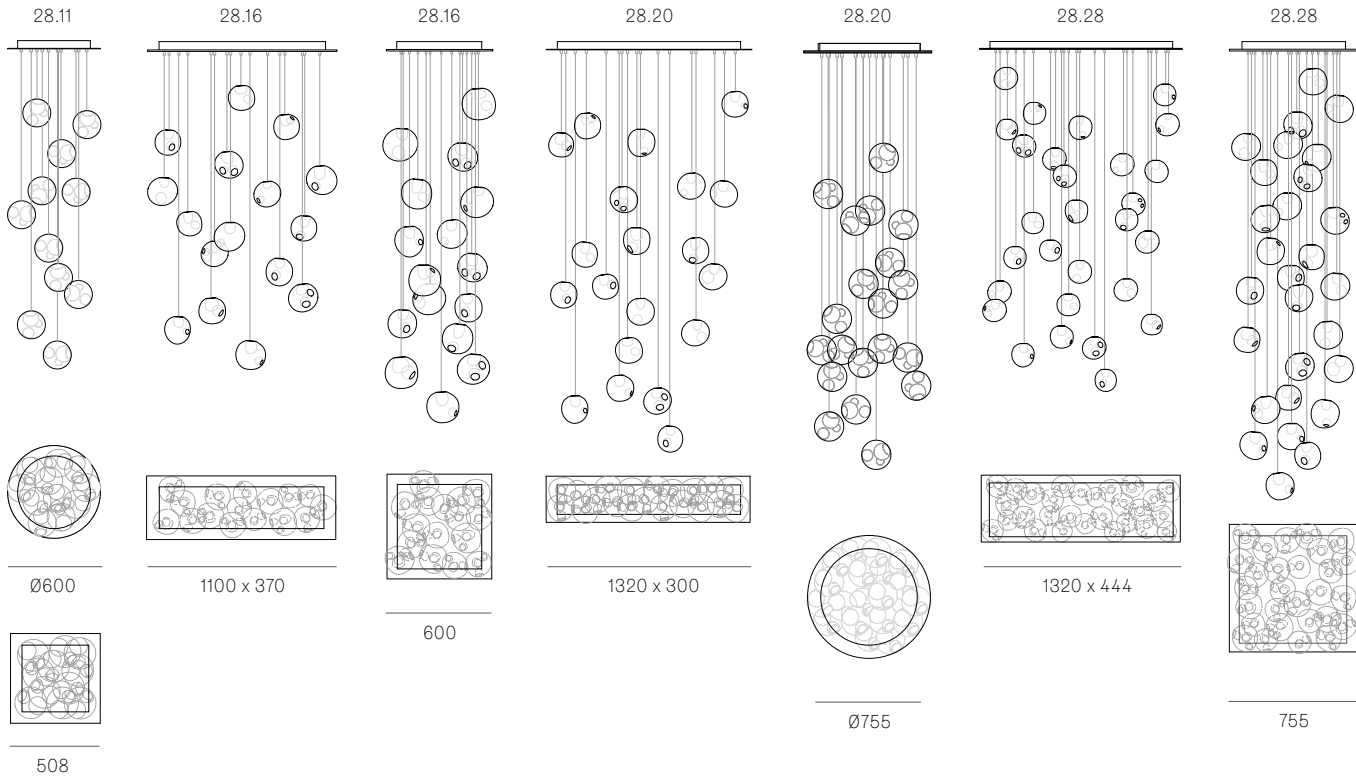

up to 3000  
standard  
up to  
30500  
custom

All dimensions are in millimeters (mm) unless otherwise specified.

**Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:**

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in order to avoid voltage drop, are the responsibility of the installing party.

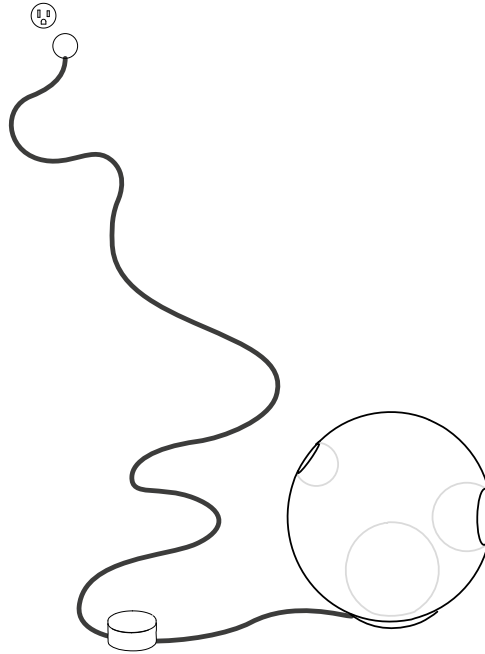


Image shown above 28t

**Series** 28, 38V, 57, 73, 84, 84V, 100, 118

**Glass Colours** 28: Clear, colour pendants  
 38V: Clear  
 57: Grey, white, light mirror, dark mirror  
 73: Clear, grey 1, grey 2, grey 3  
 84/84Vt: White/copper  
 100: Frosted clear, frosted grey  
 118: White

**Lamp** 1.5W LED, 2500K, 130lm  
 84/84V, 1.5W LED, 3500K, 130lm

**Plug Types** Type A - 110V  
 Type C - 230V  
 Type G - 230V  
 Type I - 230V

**Base** Ø75mm

**Cable length** 2290mm black flexible cord

**Finish** Unlacquered brass base and dial control

**Materials** Glass, brass, electrical components

**Power Supply** Integral, dial control with build-in dimmer  
 Input 100-240V, 0.5A 50-60Hz  
 Output 12V  
 Ta 25°C

**Dimming** Built-in dimmer ONLY

**Environment** Indoor, dry location. IP30

**Note** The brass used in our Table Light is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

**Patent #** 28: US D687,740  
 EU 001695834-001 to 004  
 38V: EU 002071019-001  
 57: US D796732  
 EU 002268581-0001 to 0006  
 73: US D762,323 S  
 EU 002633230-0001 - 0003  
 84: EU 003611144-0001 to 0004  
 100: US Patent pending  
 EU 008526131-0001  
 118: Worldwide patents pending


**Certifications**




**Weight (kg)**

28t	1	84t	2
38Vt	2.5	84Vt	2
57t	2	100t	4
73t	2.7	118t	3.6


**PLUG TYPES**




Type A



Type C




Type G



Type I


**TABLE LIGHT**

± Ø165




28t

Ø190 - 215

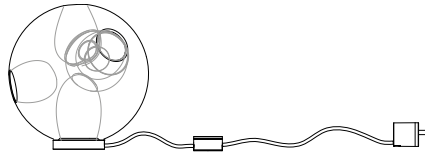


38Vt

100 - 150




57t

± 230 - 380




73t

± Ø100 - 120



84t

± Ø135



84Vt

± 190





100t

± Ø140 - 160mm



118t

All dimensions are in millimeters (mm) unless otherwise specified.

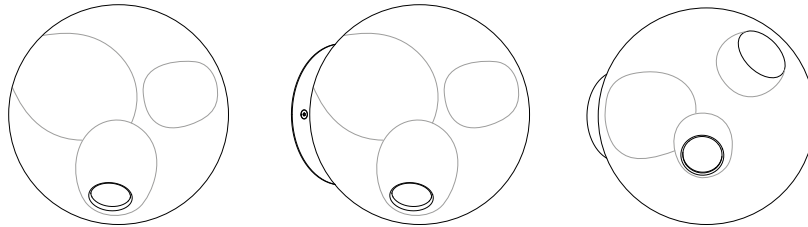

± Ø165mm

Image shown 28s (left), 28sp (center), 28s Brass (right)

**Series** 28

**Mounting** Wall mounted

**Glass Colours** Clear, colour pendants

**Lamp** 1.5W LED, 2500K, 130lm  
20W Xenon, 2600K, 196lm (28s & 28sp ONLY)

**Canopy Finishes** 28s/sp: White canopy  
28s Brass: Brass

**Materials** Blown glass, electrical components, steel canopy. Brass canopy for 28s Brass.

**Power Supply** 28s & 28s Brass: Remote mounted  
28sp: Integral

Bocci recommends remote mounting power supplies for ease of long-term maintenance.

**Environment** Indoor, dry location. IP30

**Note** Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible.

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.


**Patent #** US D687,740  
EU 001695834-001 to 004

**Certifications**




**Weight (kg)**

<b>28s</b>	1
<b>28sp</b>	1
<b>28s Brass</b>	1.4

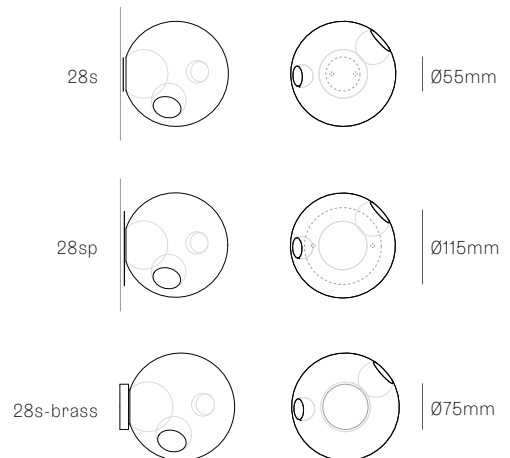


**XXXT**  
SPECIFICATION

- Pendant** One
- Material** Brass base and dial control
- Cable** Black flexible cord, 2290mm
- Plug Type** Type A - 110V  
Type C - 230V  
Type G - 230V  
Type I - 230V

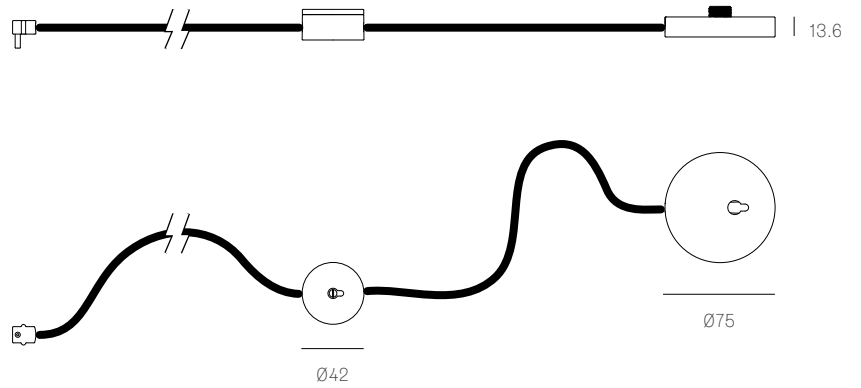

**44T**  
SPECIFICATION


- Pendant** One
- Material** Black base and dial control
- Cable** Black flexible cord, 2290mm
- Plug Type** Type A - 110V  
Type C - 230V  
Type G - 230V  
Type I - 230V

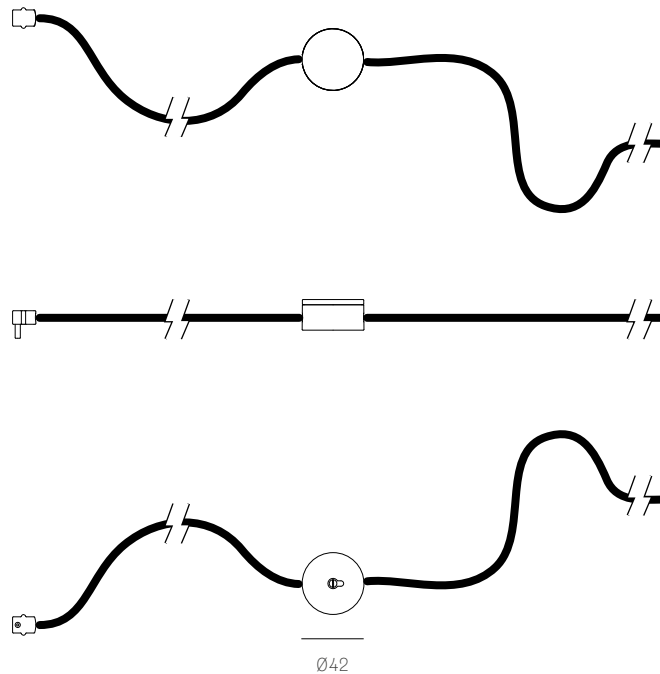

All dimensions are in millimeters (mm) unless otherwise specified.


**XXX.1**  
SPECIFICATION

<b>Pendant</b>	One
<b>Materials</b>	Brushed nickel, white or black powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral Remote for select markets only




**XXX.1 DEEP**  
SPECIFICATION

<b>Pendant</b>	One
<b>Materials</b>	Brushed nickel, white or black powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral

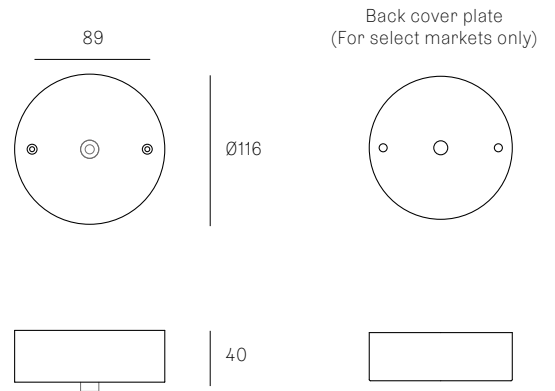


**XXX.1M**  
SPECIFICATION

<b>Pendant</b>	One
<b>Materials</b>	Brushed nickel or white powder coated zinc cover
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Remote



**XXX.1MI**  
SPECIFICATION


<b>Pendant</b>	One
<b>Material</b>	White polyurethane
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Remote



All dimensions are in millimeters (mm) unless otherwise specified.


**XXX.1M0**  
SPECIFICATION

<b>Pendant</b>	One
<b>Material</b>	White polyurethane
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Remote




**XXX.3**  
SPECIFICATION

<b>Pendants</b>	Three
<b>Materials</b>	Brushed nickel, white or black powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral

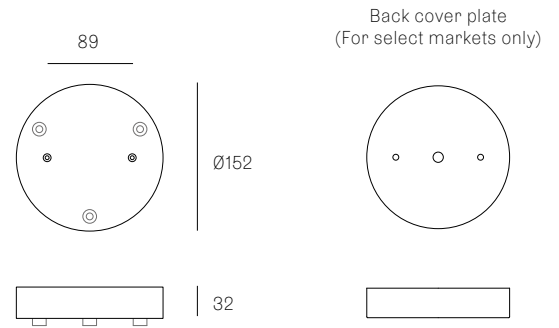


**73.3**  
SPECIFICATION

<b>Pendants</b>	Three
<b>Materials</b>	Brushed nickel, white or black powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral

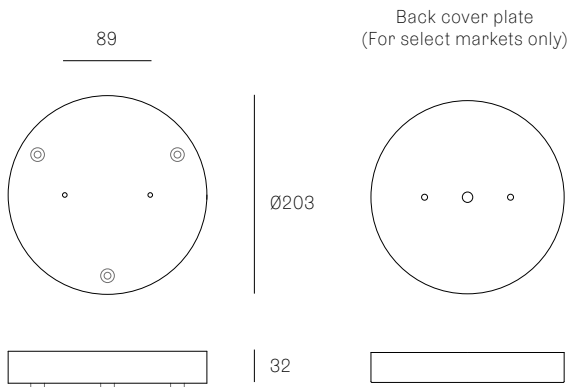

**XXX.5**  
SPECIFICATION

<b>Pendants</b>	Five
<b>Materials</b>	Brushed nickel, white or black powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral

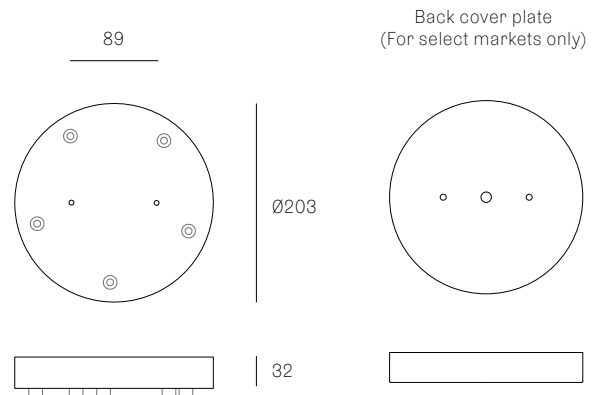


All dimensions are in millimeters (mm)  
unless otherwise specified.



**XXX.7**  
SPECIFICATION


<b>Pendants</b>	Seven
<b>Materials</b>	Brushed nickel, white or black powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral

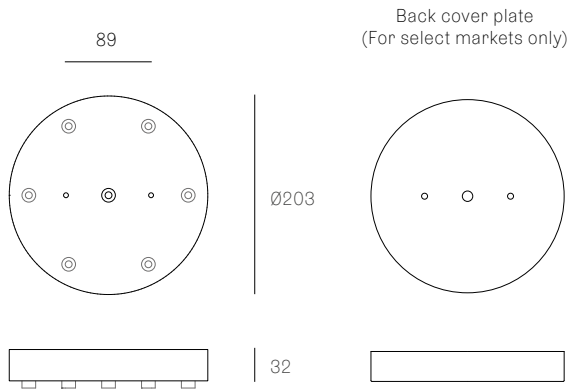

All dimensions are in millimeters (mm) unless otherwise specified.


**38.8V / 73.8 RECTANGLE**  
SPECIFICATION

<b>Pendants</b>	Eight
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	704 x 138 x 16

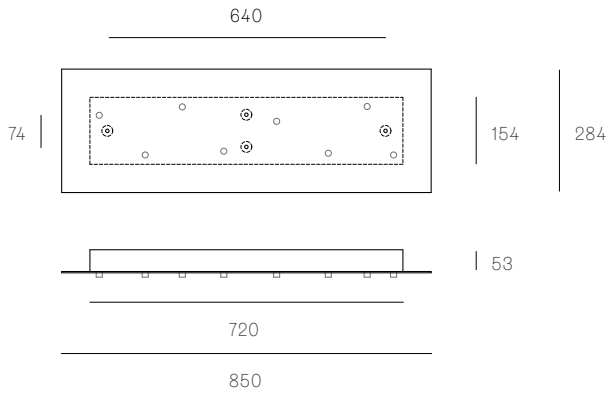


**38.8V / 73.8 ROUND**  
SPECIFICATION

<b>Pendants</b>	Eight
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	∅362 x 16

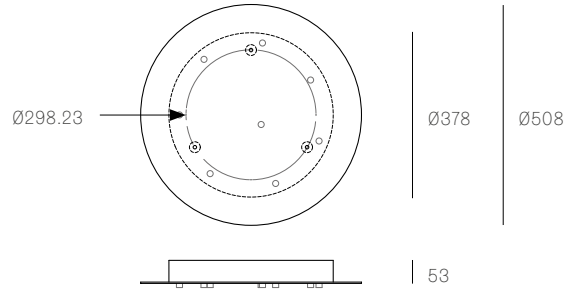


**XXX.9 RECTANGLE**  
SPECIFICATION

<b>Pendants</b>	Nine
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	1108 x 132 x 16

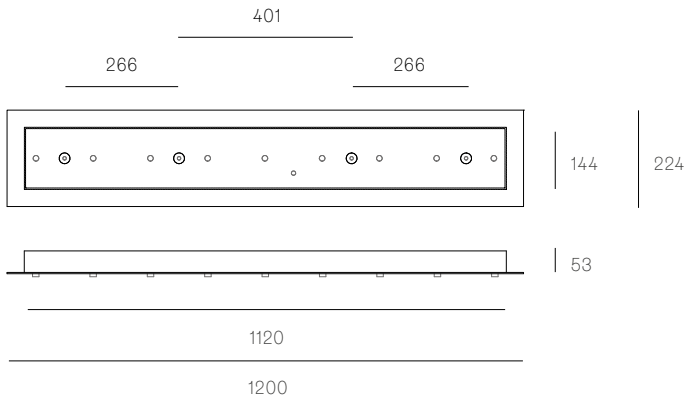

**XXX.11 RECTANGLE**  
SPECIFICATION


<b>Pendants</b>	Eleven
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	704 x 138 x 16

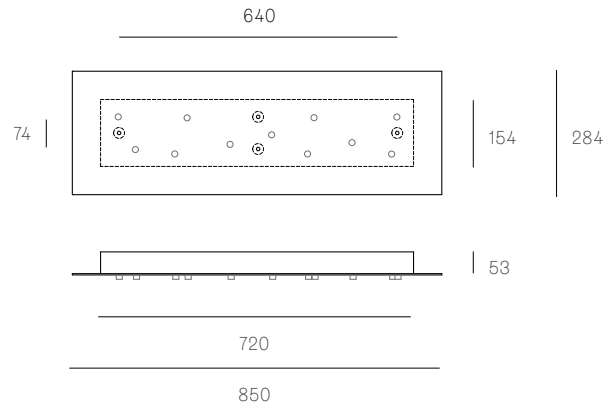

All dimensions are in millimeters (mm) unless otherwise specified.


**38.11V / 73.11 RECTANGLE**  
SPECIFICATION

<b>Pendants</b>	Eleven
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	854 x 224 x 16

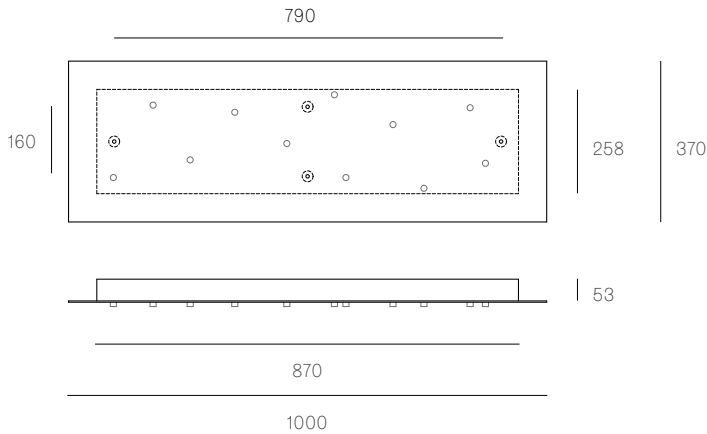


**XXX.11 ROUND**  
SPECIFICATION

<b>Pendants</b>	Eleven
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	Ø362 x 16

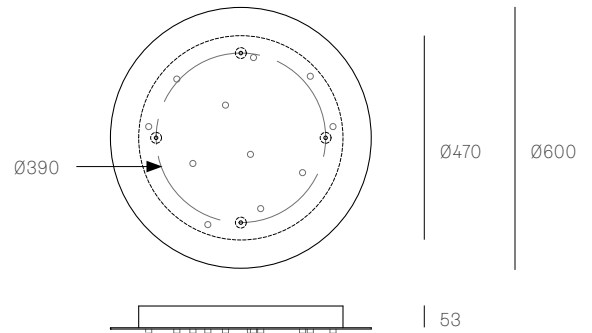


**XXX.11 SQUARE**  
SPECIFICATION

<b>Pendants</b>	Eleven
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	362 x 362 x 16

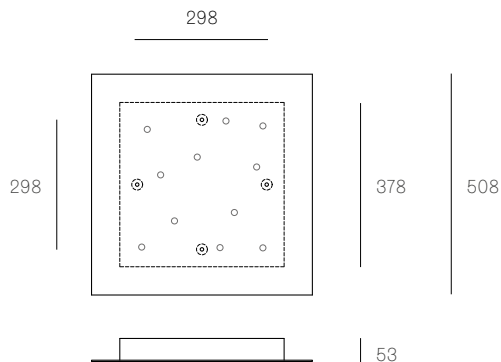

**XXX.14 RECTANGLE**  
SPECIFICATION


<b>Pendants</b>	Fourteen
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	704 x 138 x 16

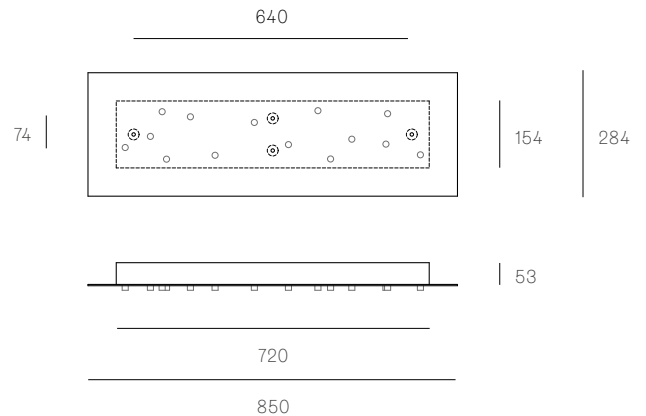

All dimensions are in millimeters (mm) unless otherwise specified.


**XXX.14 ROUND**  
SPECIFICATION

<b>Pendants</b>	Fourteen
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	Ø362 x 16

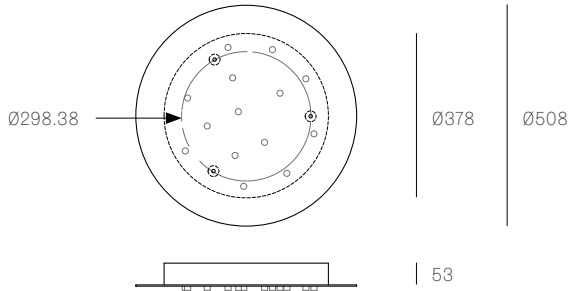


**XXX.16 RECTANGLE**  
SPECIFICATION

<b>Pendants</b>	Sixteen
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	954 x 224 x 16

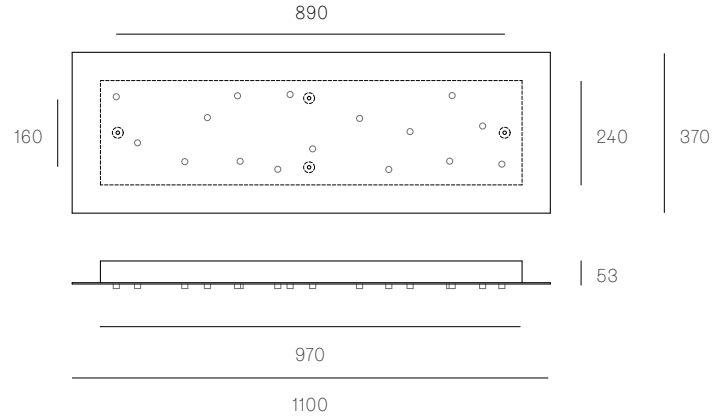


**XXX.16 SQUARE**  
SPECIFICATION

<b>Pendants</b>	Sixteen
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	454 x 454 x 16

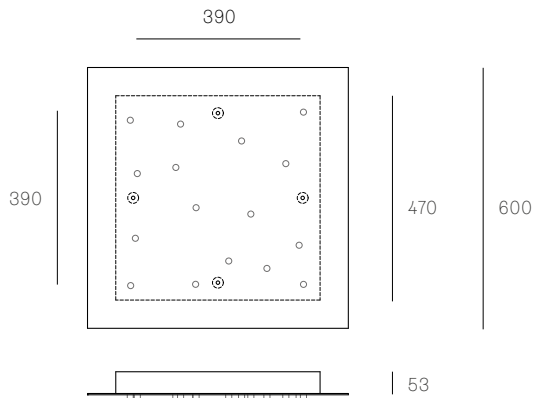

**XXX.20 RECTANGLE**  
SPECIFICATION


<b>Pendants</b>	Twenty
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	1174 x 154 x 16

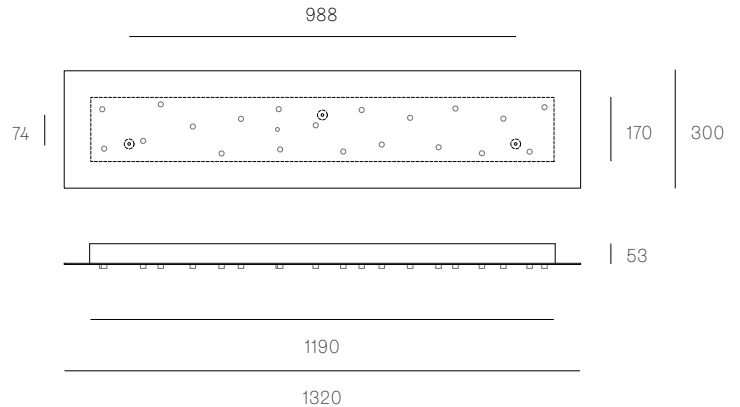

All dimensions are in millimeters (mm) unless otherwise specified.


**73.20 RECTANGLE**  
SPECIFICATION

<b>Pendants</b>	Twenty
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	1174 x 299 x 16

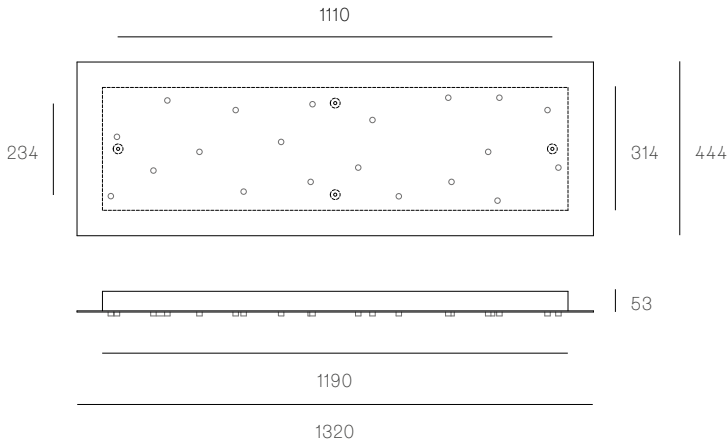


**XX.20 ROUND**  
SPECIFICATION

<b>Pendants</b>	Twenty
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	Ø609 x 16

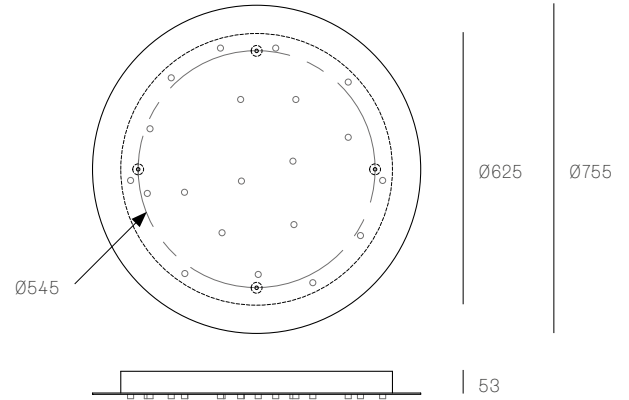


**73.20 SQUARE**  
SPECIFICATION

<b>Pendants</b>	Twenty
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	609 x 609 x 16

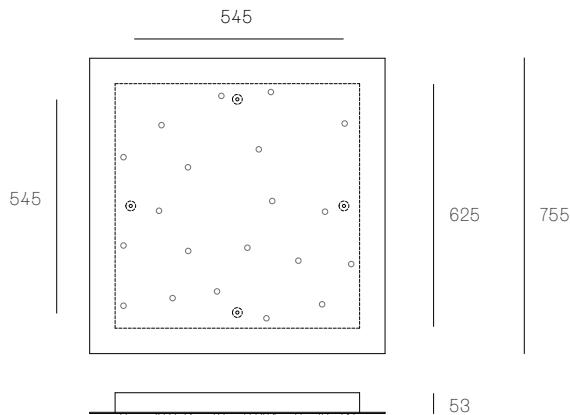

**XXX.21 RECTANGLE**  
SPECIFICATION


<b>Pendants</b>	Twenty-one
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	704 x 135 x 16

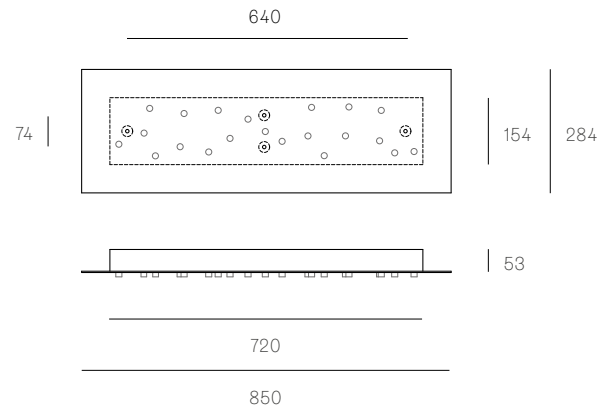

All dimensions are in millimeters (mm) unless otherwise specified.


**XXX.26 RECTANGLE**  
SPECIFICATION

<b>Pendants</b>	Twenty-six
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	854 x 189 x 16

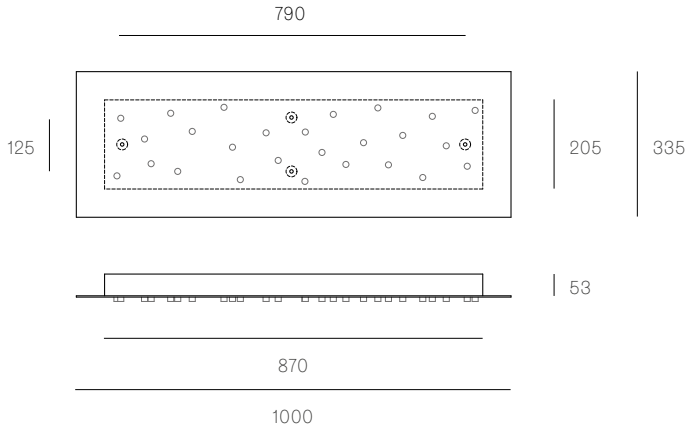


**XXX.26 ROUND**  
SPECIFICATION

<b>Pendants</b>	Twenty-six
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	Ø454 x 16

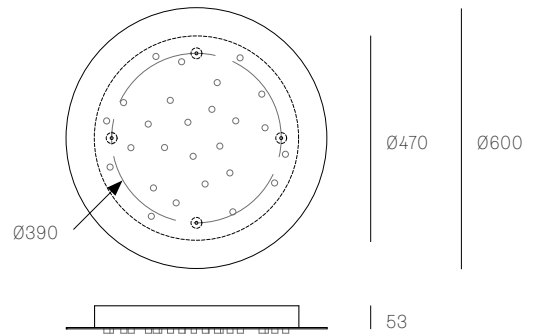


**XXX.26 SQUARE**  
SPECIFICATION

<b>Pendants</b>	Twenty-six
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	454 x 454 x 16

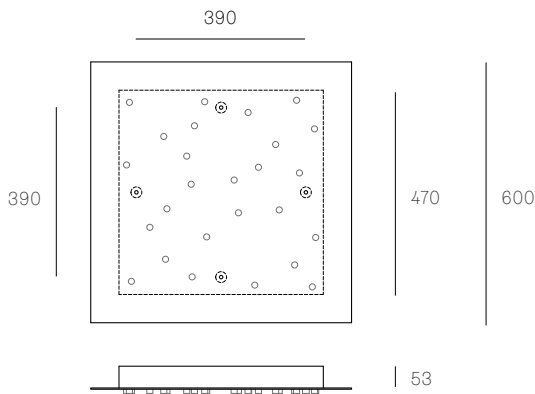

**XXX.28 RECTANGLE**  
SPECIFICATION


<b>Pendants</b>	Twenty-eight
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	1174 x 298 x 16

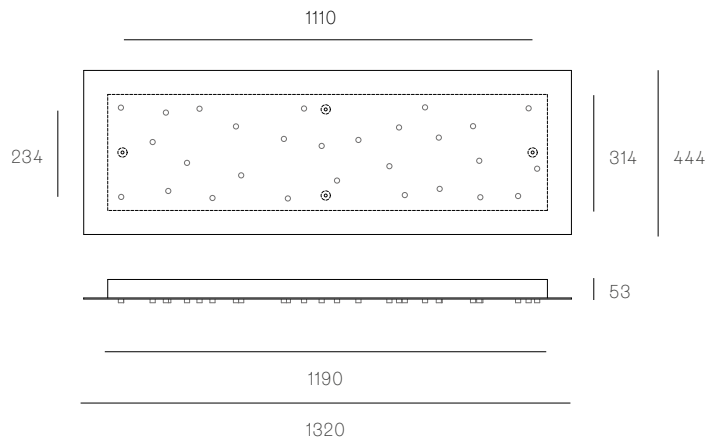

All dimensions are in millimeters (mm) unless otherwise specified.


**XXX.28 SQUARE**  
SPECIFICATION

<b>Pendants</b>	Twenty-eight
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	609 x 609 x 16

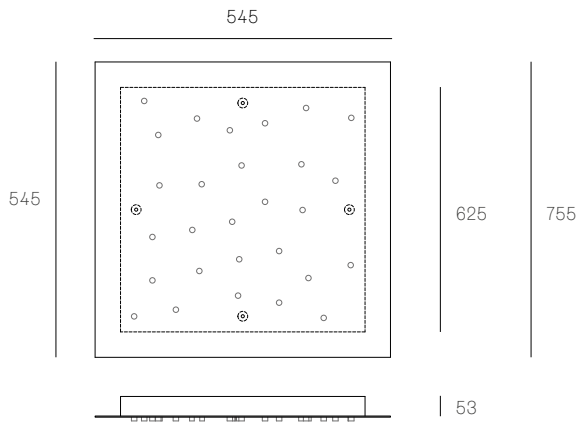


**XXX.36 RECTANGLE**  
SPECIFICATION

<b>Pendants</b>	Thirty-six
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	954 x 224 x 16

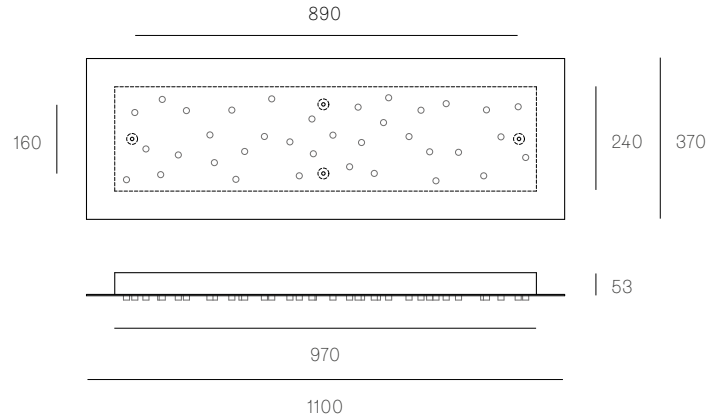


**XXX.36 ROUND**  
SPECIFICATION

<b>Pendants</b>	Thirty-six
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	Ø609 x 16

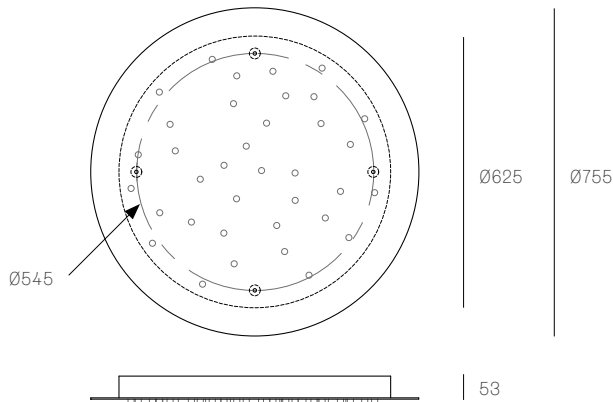

**XXX.36 SQUARE**  
SPECIFICATION


<b>Pendants</b>	Thirty-six
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	609 x 609 x 16

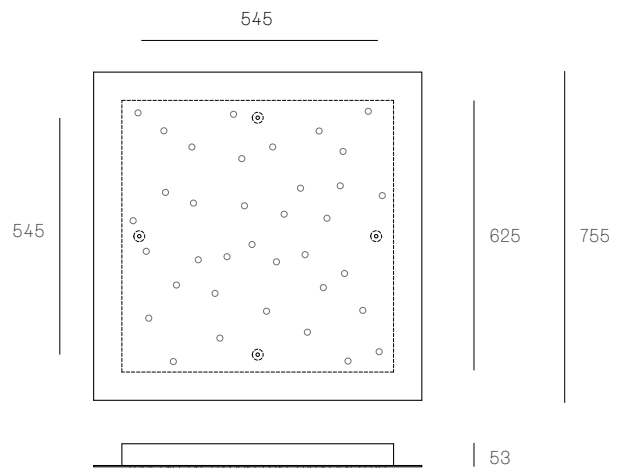

All dimensions are in millimeters (mm) unless otherwise specified.

**XXX.50 SQUARE**  
SPECIFICATION

<b>Pendants</b>	Fifty
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	609 x 609 x 16

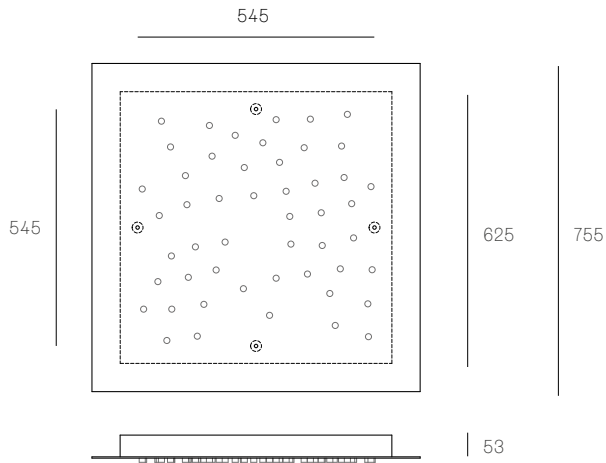


All dimensions are in millimeters (mm)  
unless otherwise specified.




**XXXS**  
SPECIFICATION

**Pendant** One  
**Material** White powder coated stainless steel cover  
**Power Supply** Remote

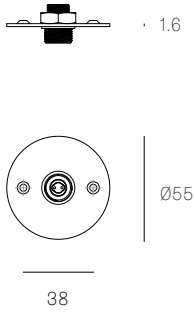


**XXXSP**  
SPECIFICATION

**Pendant** One  
**Material** White powder coated stainless steel cover  
**Power Supply** Integral  
 Remote for select markets only

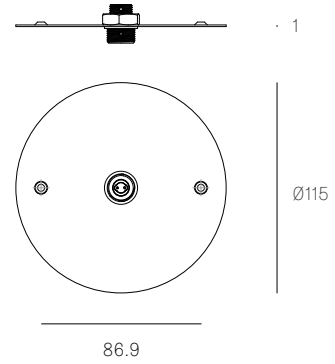


**76S**  
SPECIFICATION

**Pendant** One  
**Material** White powder coated stainless steel cover  
**Power Supply** Remote

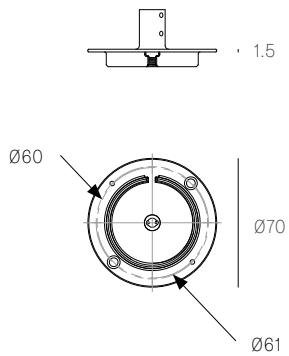

**76SP**  
SPECIFICATION


**Pendant** One  
**Material** White powder coated stainless steel cover  
**Power Supply** Integral  
 Remote for select markets only

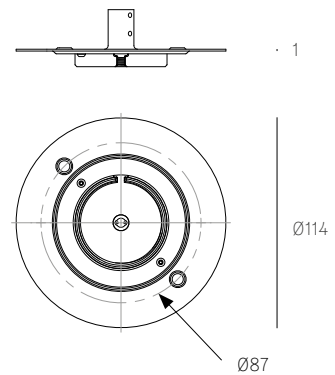

All dimensions are in millimeters (mm) unless otherwise specified.

**XXXS BRASS**  
SPECIFICATION

<b>Pendant</b>	One
<b>Material</b>	Brass base
<b>Power Supply</b>	Remote



All dimensions are in millimeters (mm)  
unless otherwise specified.