

Image shown above 44.8 with rectangular canopy

± 180 - 330mm

<b>Series</b>	44
<b>Mounting</b>	Ceiling mounted
<b>Pendant Colour</b>	Aluminum
<b>Lamp</b>	1.5W LED, 2500K, 130lm
<b>Coaxial Cable</b>	Adjustable 3000mm standard / up to 30500mm maximum
<b>Canopy Finish</b>	White canopy
<b>Materials</b>	Cast aluminum, braided metal coaxial cable, suspension cable, electrical components, steel canopy
<b>Power Supply</b>	Integral for 44.3 Remote mounted for 44.3m, 44.8, 44.14
<b>Environment</b>	Indoor, dry location. IP30
<b>Note</b>	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
<b>Patent #</b>	US D776,856 EU 002840975-0001-0003

**Certifications**



**Weight (kg)**



Round

<b>44.3</b>	13.6
-------------	------




Rectangle

<b>44.8</b>	50
-------------	----


<b>44.14</b>	67.6
--------------	------

ADJUSTABLE LENGTH

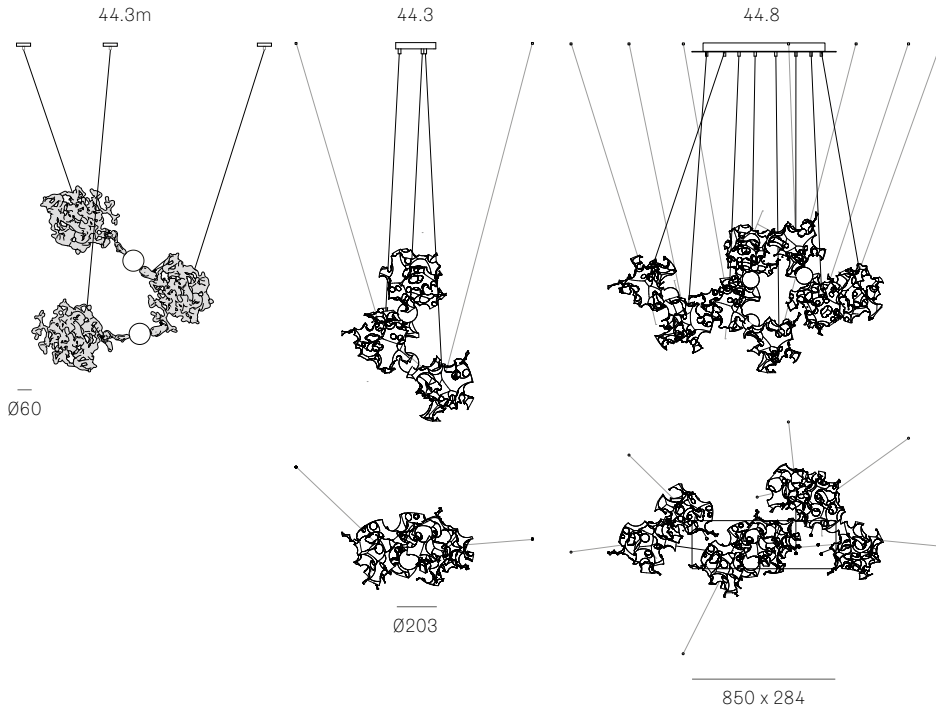

up to 3000  
standard


up to  
30500  
custom

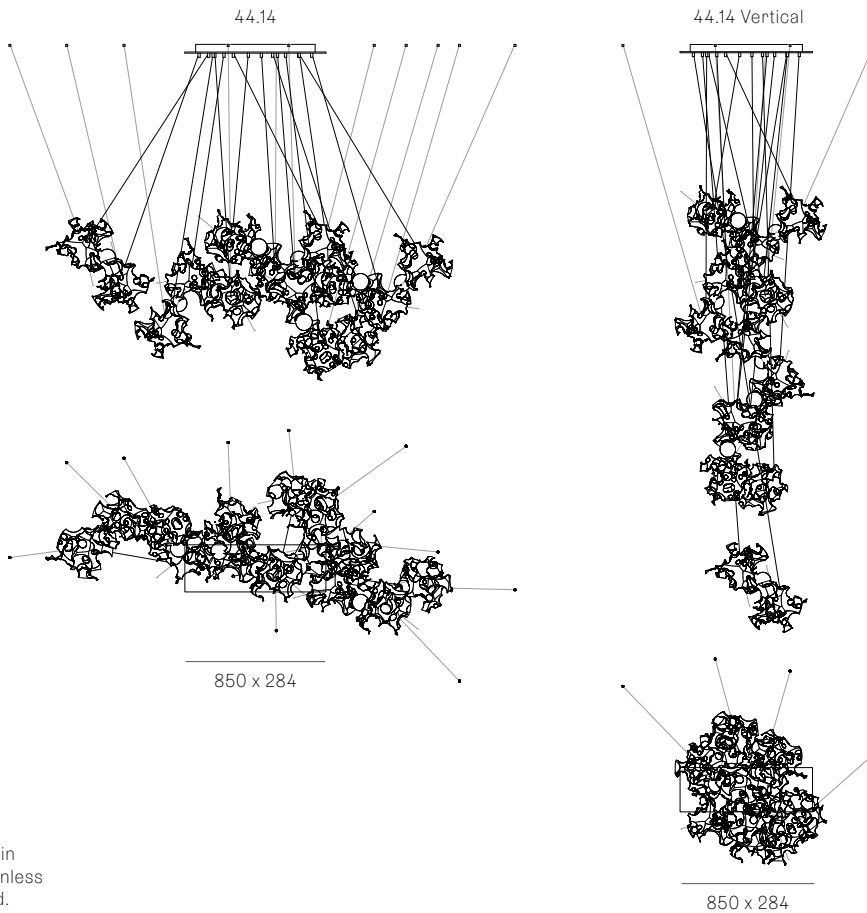


up to 3000  
standard

up to  
30500  
custom

All dimensions are in millimeters (mm) unless otherwise specified.

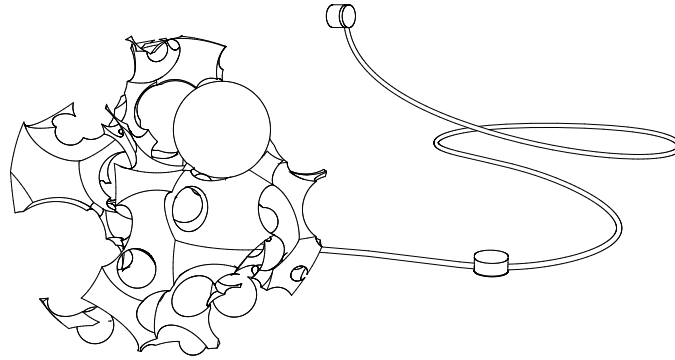

± 250 - 400mm



44t

Image shown above 44t

<b>Series</b>	44
<b>Pendant Colour</b>	Aluminum
<b>Lamp</b>	1.5W LED, 2500K, 130lm
<b>Plug Types</b>	Type A - 110V Type C - 230V Type G - 230V Type I - 230V
<b>Cable length</b>	2290mm black flexible cord
<b>Finish</b>	Aluminum
<b>Materials</b>	Cast aluminum, electrical components
<b>Power Supply</b>	Integral, dial control with build-in dimmer
<b>Dimming</b>	Built-in dimmer ONLY
<b>Environment</b>	Indoor, dry location. IP20
<b>Note</b>	Bocci recommends wearing gloves during the installation. The aluminum pendant may be sharp to handle.  Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
<b>Patent #</b>	US D776,856 EU 002840975-0001-0003


**Weight (kg)**

**44t**                      3


**PLUG TYPES**



Type A



Type C



Type G




Type I

**Certifications**




**XXXT**  
SPECIFICATION

- Pendant** One
- Material** Brass base and dial control
- Cable** Black flexible cord, 2290mm
- Plug Type** Type A - 110V  
Type C - 230V  
Type G - 230V  
Type I - 230V

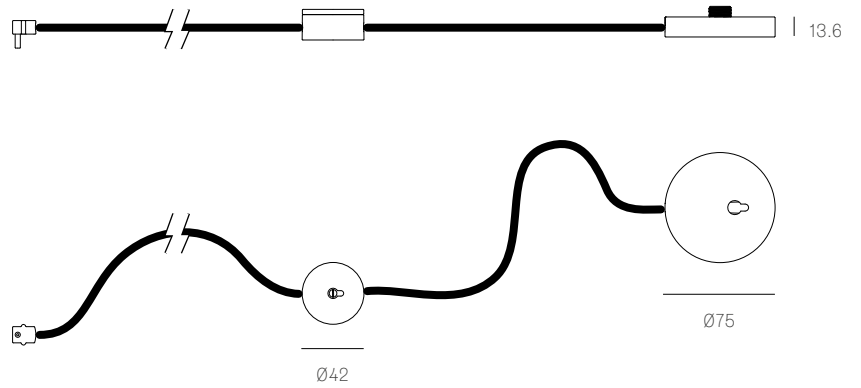

**44T**  
SPECIFICATION


- Pendant** One
- Material** Black base and dial control
- Cable** Black flexible cord, 2290mm
- Plug Type** Type A - 110V  
Type C - 230V  
Type G - 230V  
Type I - 230V

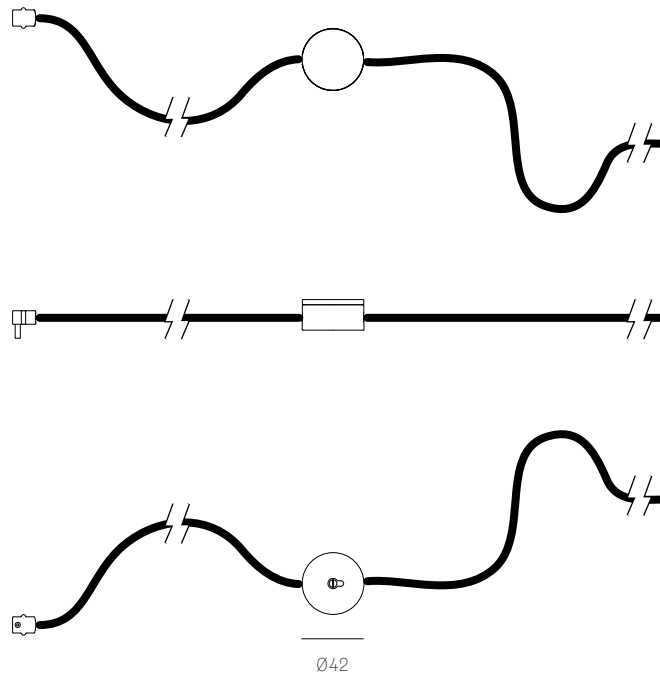

All dimensions are in millimeters (mm) unless otherwise specified.


**44.3M**  
SPECIFICATION

<b>Pendant</b>	Three
<b>Material</b>	Copper or white powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500
<b>Power Supply</b>	Remote




**44.3**  
SPECIFICATION

<b>Pendant</b>	Three
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral

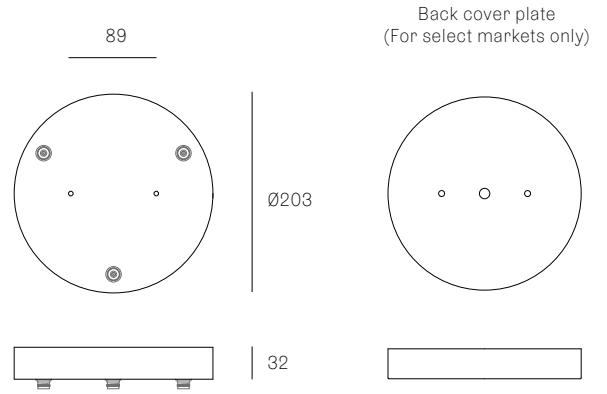


**44.8 RECTANGLE**  
SPECIFICATION

<b>Pendant</b>	Eight
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	704 x 138 x 16

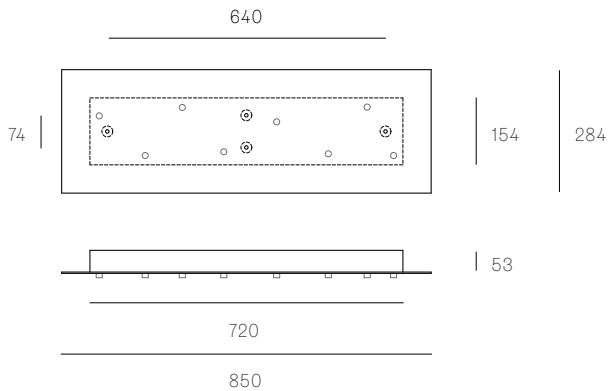

**44.14 RECTANGLE**  
SPECIFICATION

<b>Pendant</b>	Fourteen
<b>Material</b>	White powder coated stainless steel cover
<b>Cable</b>	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
<b>Power Supply</b>	Integral
<b>Wood Backing</b>	704 x 138 x 16

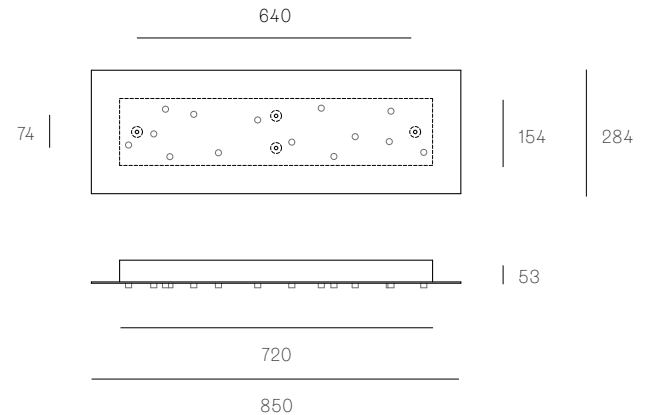

All dimensions are in millimeters (mm) unless otherwise specified.