




Image shown above 73.16V with rectangular canopy

Series	73V
Mounting	Ceiling mounted
Glass Colours	Clear, grey 1, purple 1, blue 1, opaque white 1, opaque green 1, opaque blue 1
Lamp	1.5W LED, 2500K, 130lm 10W Xenon, 2600K, 81lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 73.1V - 73.7V Non-adjustable Length: 73.11V - 73.28V
Canopy Finishes	73.1V - 73.7V: white, black or brushed nickel canopy 73.1mi/mo: white polyurethane canopy 73.11V - 73.28V: white canopy
Materials	Blown glass, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 73.1Vm/mo/mi. Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US D946,197 EU 006365441-0001-0004

Weight (kg)

	
Round	Rectangle
73.1V	73.11V
1.7	26
73.3V	73.16V
5	39
73.5V	73.20V
8	45
73.7V	73.28V
12	63
	
Square	
73.11V	26
73.16V	37
73.28V	63

Certifications




ADJUSTABLE LENGTH



up to 3000
standard
up to 30500
custom

NON-ADJUSTABLE LENGTH

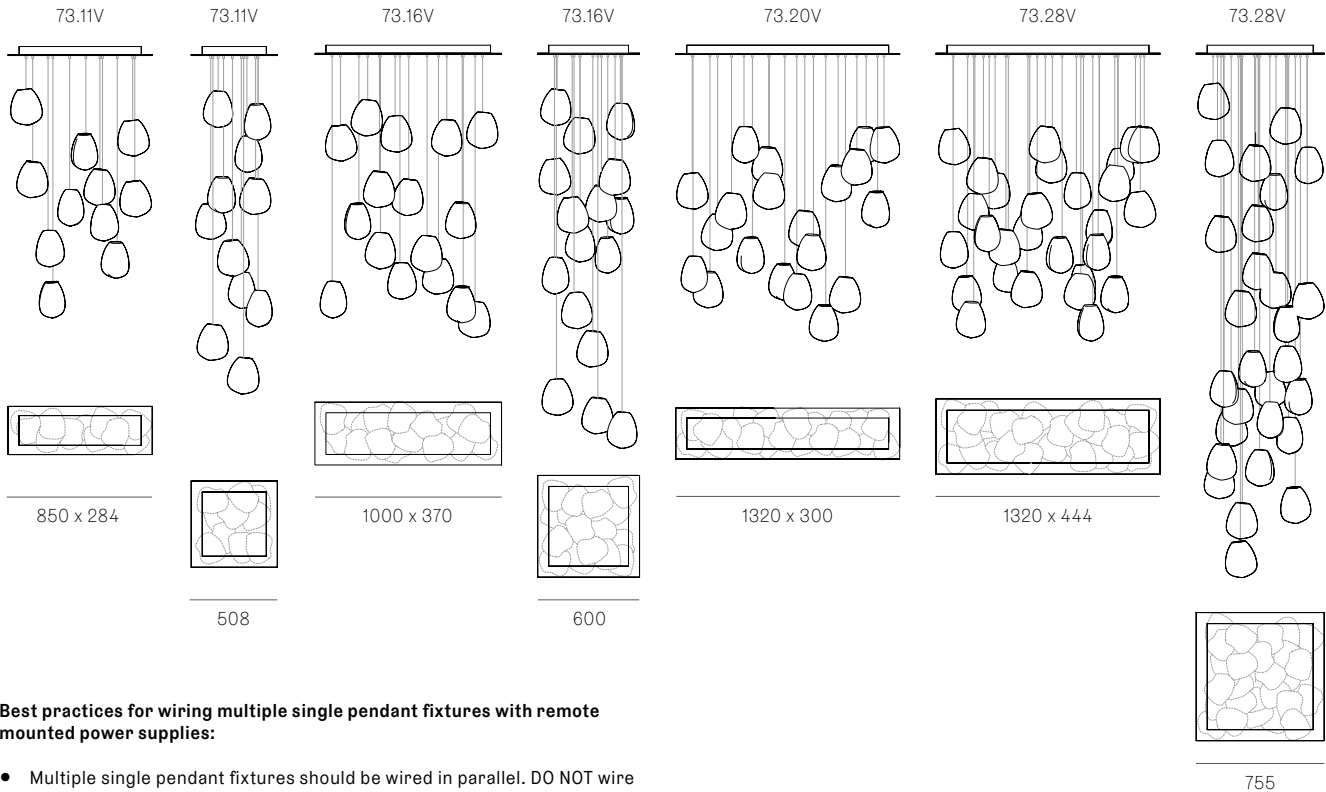

up to 3000
standard
up to
30500
custom

Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.





Image shown above 73.3V with round canopy

Series	73V
Mounting	Ceiling mounted
Glass Colours	Clear, grey 1, purple 1, blue 1, opaque white 1, opaque green 1, opaque blue 1
Lamp	1.5W LED, 2500K, 130lm 10W Xenon, 2600K, 81lm
Sculptural Cable	3000mm standard / up to 30500mm maximum Adjustable length: 73.1V - 73.7V Non-adjustable Length: 73.13V - 73.61V
Cable Finishes	Black or nickel
Canopy Finishes	73.1V - 73.7V: white, black or brushed nickel canopy 73.1mi/mo: white polyurethane canopy 73.13V - 73.61V: white canopy
Material	Blown glass, braided metal cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 73.1V/mo/mi. Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible. Pendant anchor kit included. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US D946,197 EU 006365441-0001-0004

Certifications

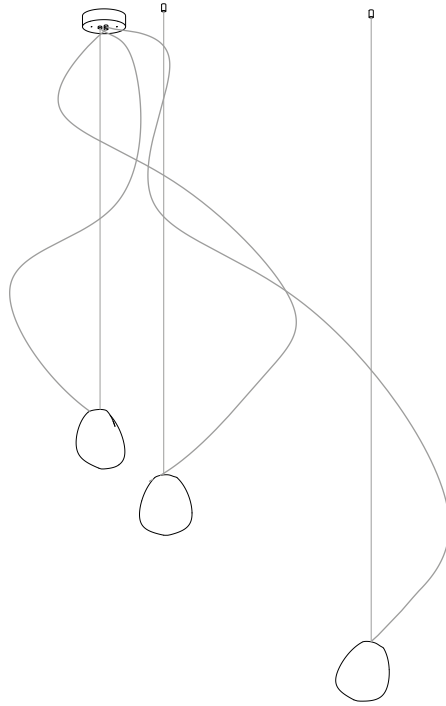

Weight (kg)




Round

73.1V	1.7
73.3V	5
73.7V	12
73.13	28.5
73.19V	37
73.37V	68
73.61V	111


Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel, DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

ADJUSTABLE LENGTH

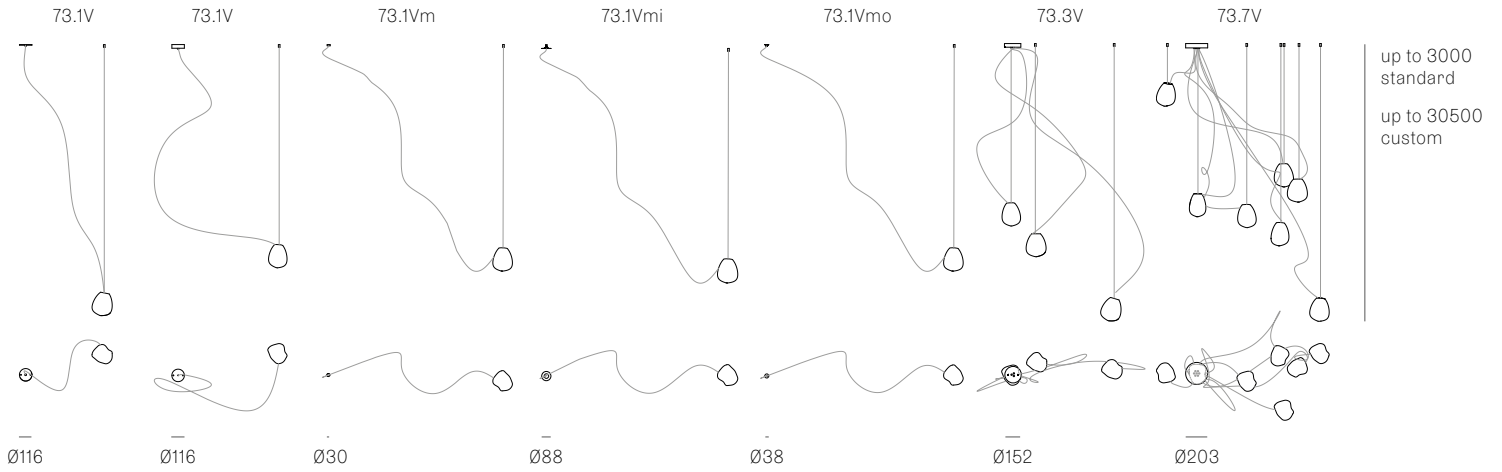


NON-ADJUSTABLE LENGTH

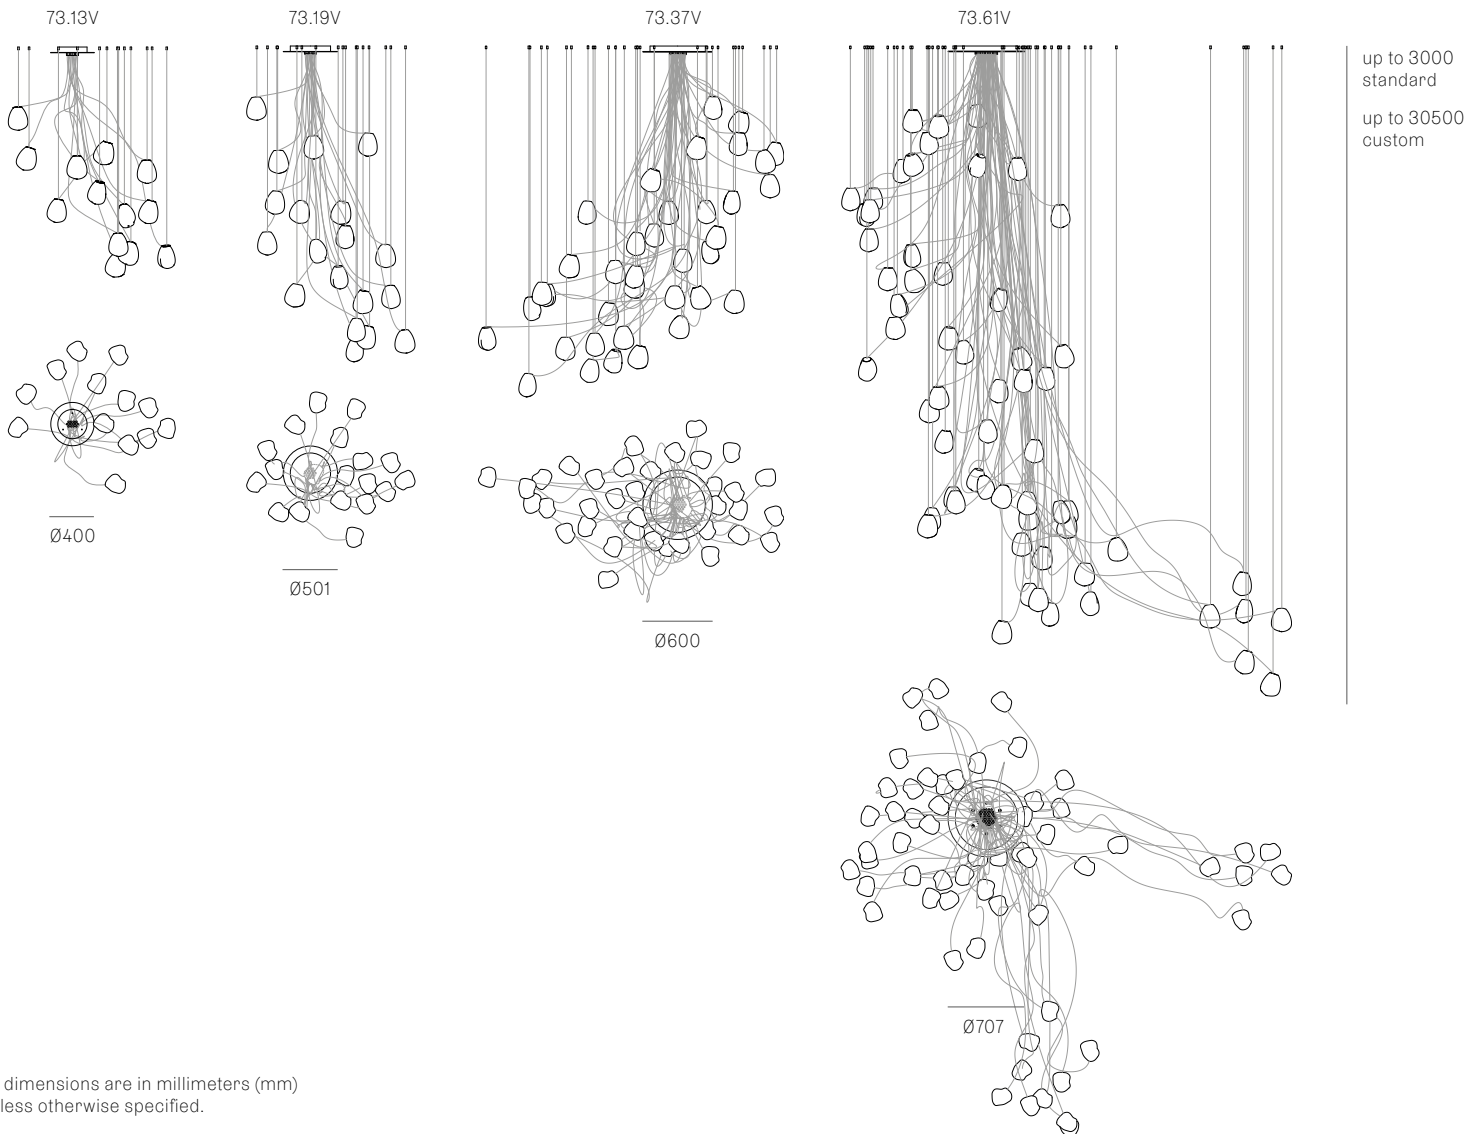

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.1
SPECIFICATION

Pendant	One
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral Remote for select markets only

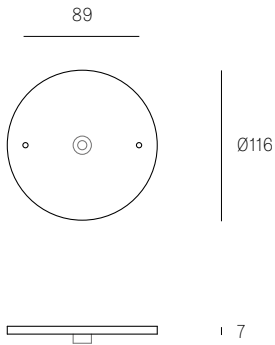


XXX.1 DEEP
SPECIFICATION

Pendant	One
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

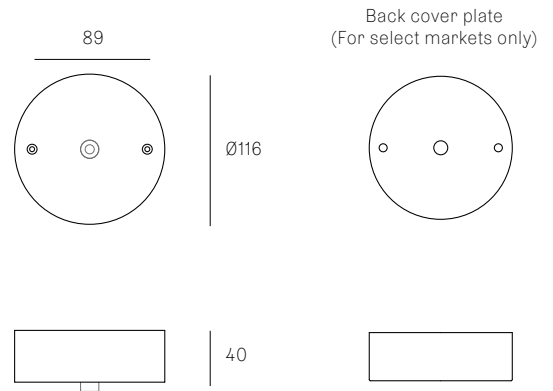


XXX.1M
SPECIFICATION

Pendant	One
Materials	Brushed nickel or white powder coated zinc cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote



XXX.1MI
SPECIFICATION


Pendant	One
Material	White polyurethane
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote



All dimensions are in millimeters (mm) unless otherwise specified.


XXX.1M0
SPECIFICATION

Pendant	One
Material	White polyurethane
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote




XXX.3
SPECIFICATION

Pendants	Three
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

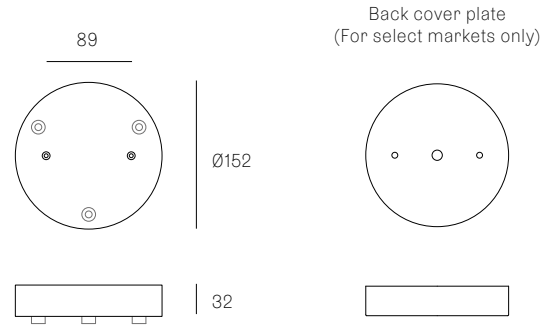


73.3
SPECIFICATION

Pendants	Three
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

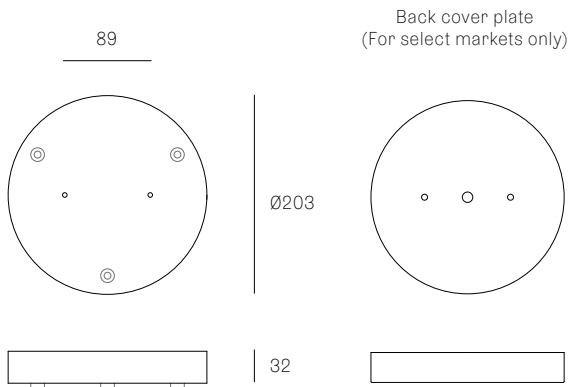

XXX.5
SPECIFICATION


Pendants	Five
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

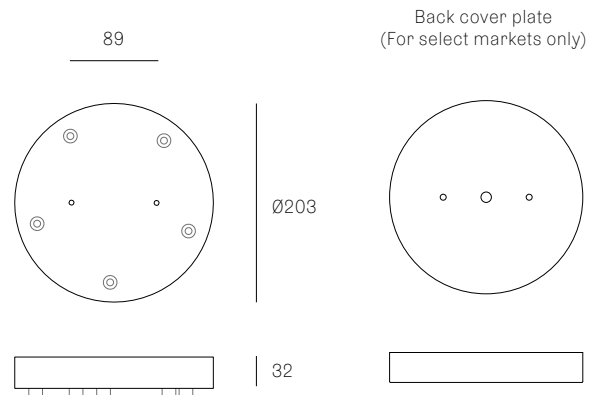

All dimensions are in millimeters (mm)
unless otherwise specified.

XXX.7
SPECIFICATION


Pendants	Seven
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

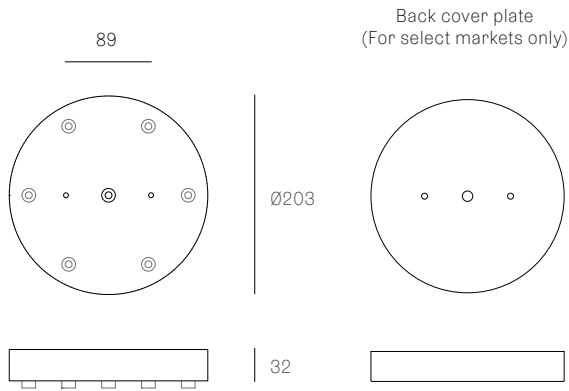

All dimensions are in millimeters (mm) unless otherwise specified.


38.8V / 73.8 RECTANGLE
SPECIFICATION

Pendants	Eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 138 x 16

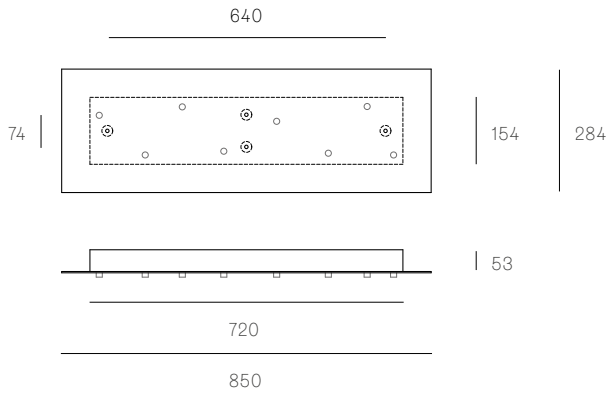


38.8V / 73.8 ROUND
SPECIFICATION

Pendants	Eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	∅362 x 16

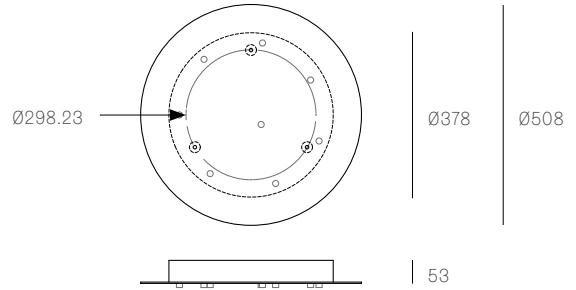


XXX.9 RECTANGLE
SPECIFICATION

Pendants	Nine
Material	White powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1108 x 132 x 16

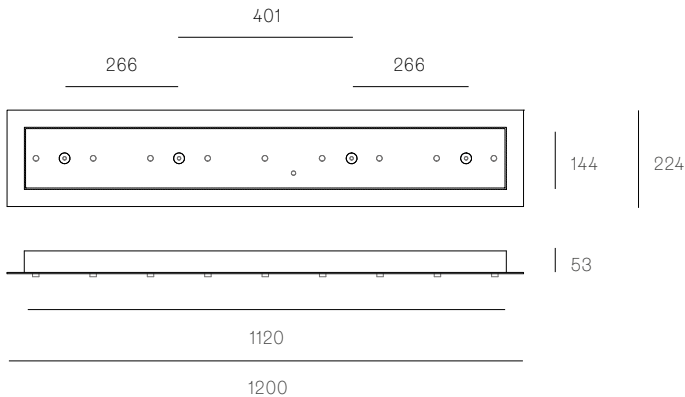

XXX.11 RECTANGLE
SPECIFICATION


Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 138 x 16

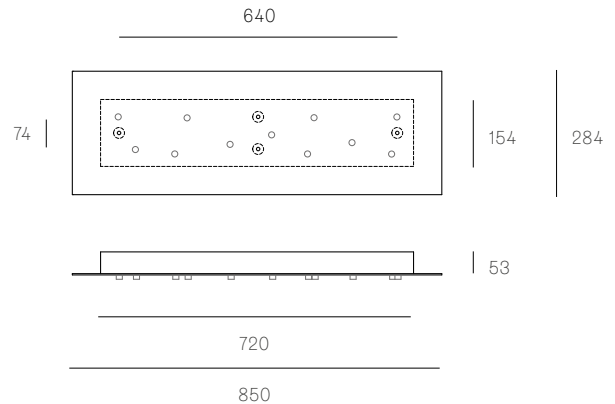

All dimensions are in millimeters (mm) unless otherwise specified.


38.11V / 73.11 RECTANGLE
SPECIFICATION

Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	854 x 224 x 16

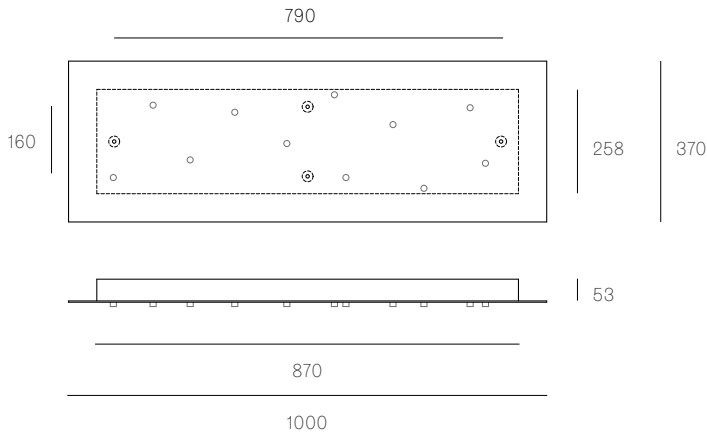


XXX.11 ROUND
SPECIFICATION

Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø362 x 16

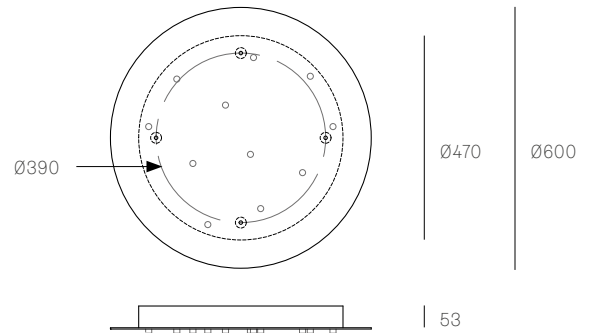


XXX.11 SQUARE
SPECIFICATION

Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	362 x 362 x 16

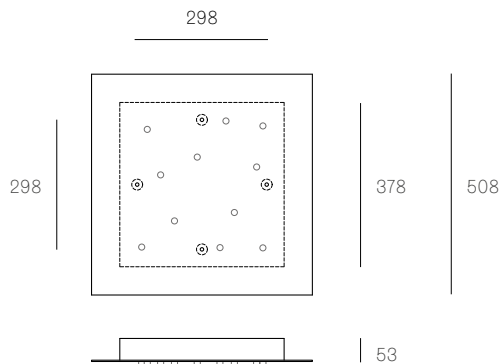

XXX.14 RECTANGLE
SPECIFICATION


Pendants	Fourteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 138 x 16

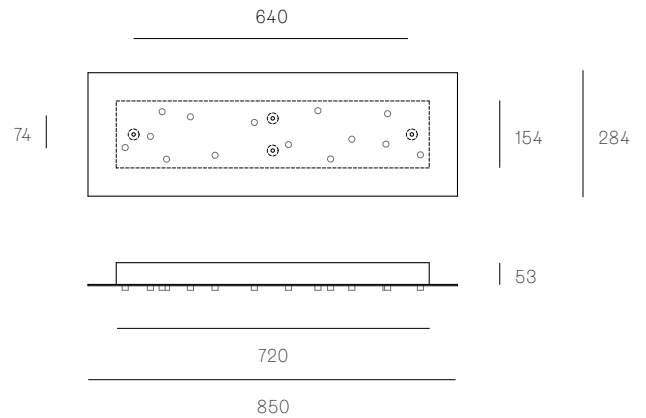

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.14 ROUND
SPECIFICATION

Pendants	Fourteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø362 x 16

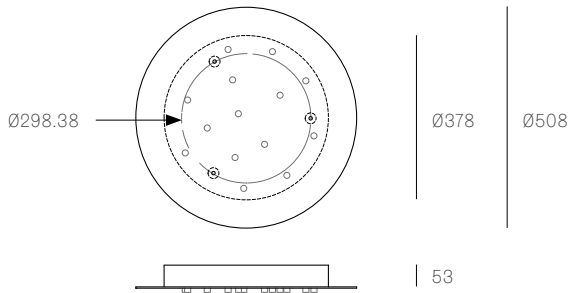


XXX.16 RECTANGLE
SPECIFICATION

Pendants	Sixteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	954 x 224 x 16

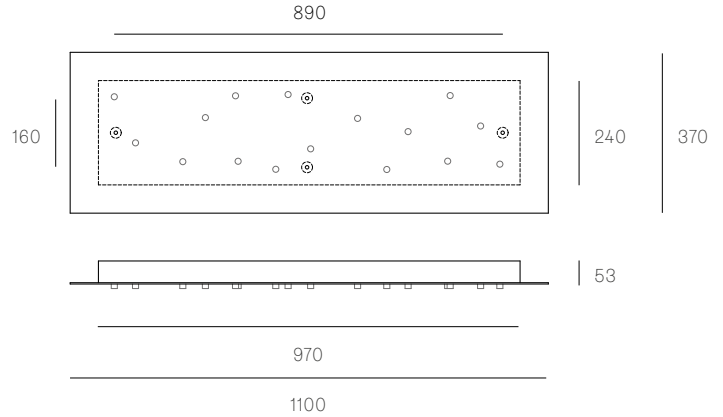


XXX.16 SQUARE
SPECIFICATION

Pendants	Sixteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	454 x 454 x 16

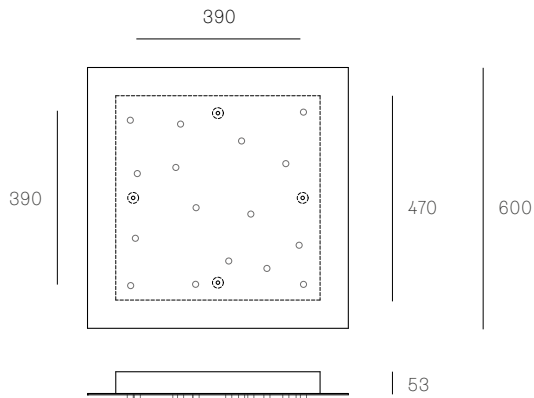

XXX.20 RECTANGLE
SPECIFICATION


Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1174 x 154 x 16

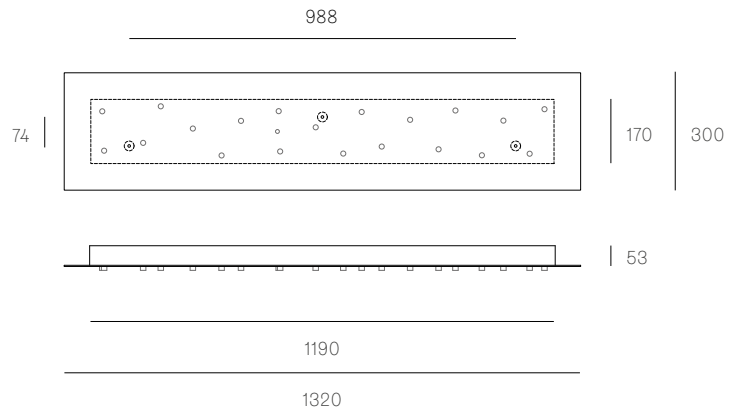

All dimensions are in millimeters (mm) unless otherwise specified.


73.20 RECTANGLE
SPECIFICATION

Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1174 x 299 x 16

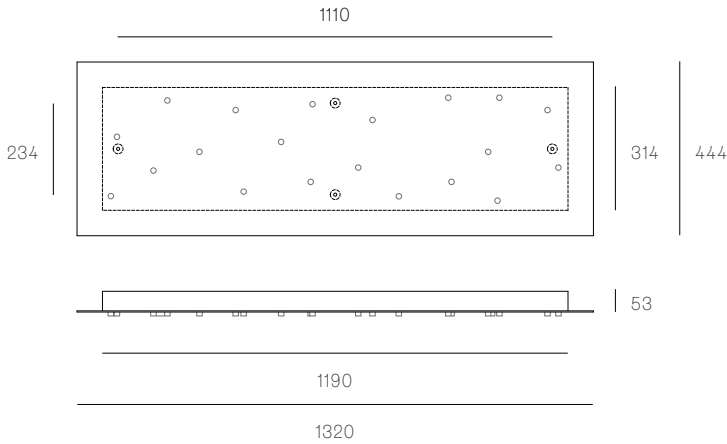


XX.20 ROUND
SPECIFICATION

Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø609 x 16

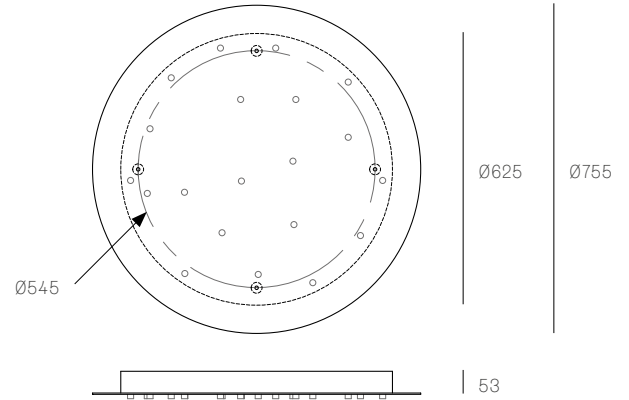


73.20 SQUARE
SPECIFICATION

Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

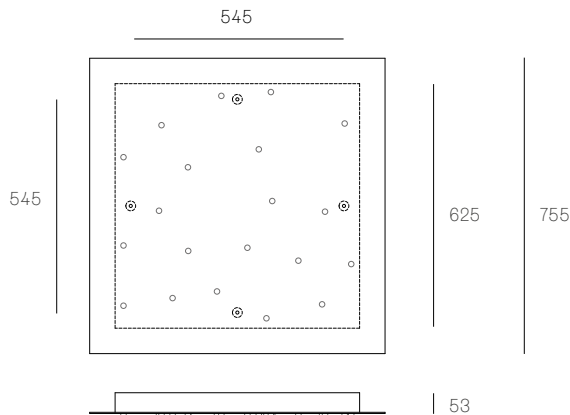

XXX.21 RECTANGLE
SPECIFICATION


Pendants	Twenty-one
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 135 x 16

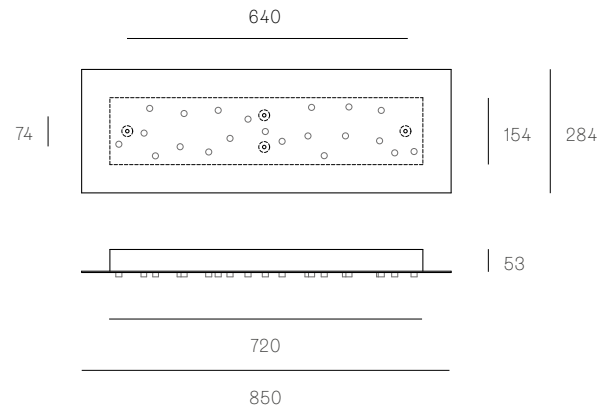

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.26 RECTANGLE
SPECIFICATION

Pendants	Twenty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	854 x 189 x 16

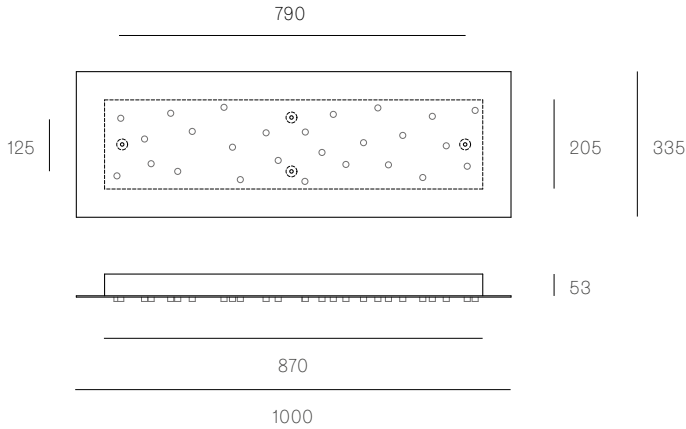


XXX.26 ROUND
SPECIFICATION

Pendants	Twenty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø454 x 16

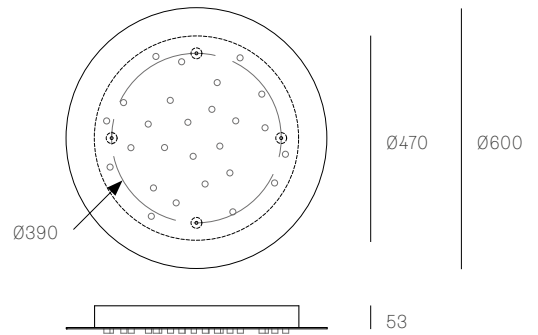


XXX.26 SQUARE
SPECIFICATION

Pendants	Twenty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	454 x 454 x 16

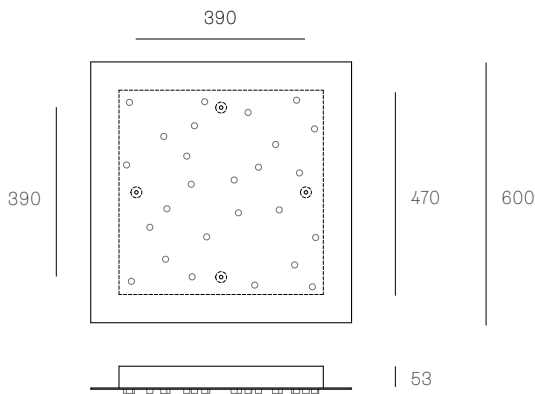

XXX.28 RECTANGLE
SPECIFICATION


Pendants	Twenty-eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1174 x 298 x 16

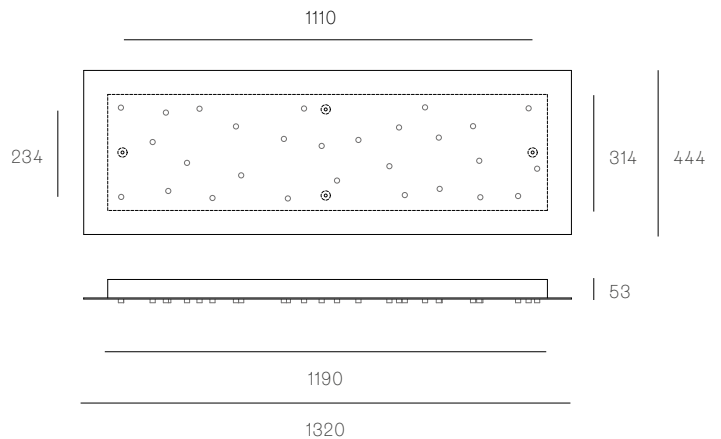

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.28 SQUARE
SPECIFICATION

Pendants	Twenty-eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

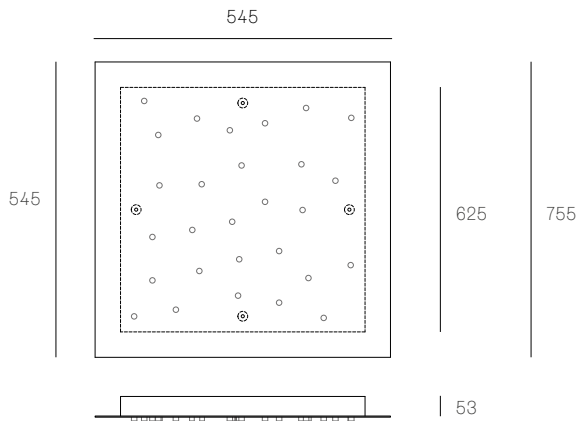


XXX.36 RECTANGLE
SPECIFICATION

Pendants	Thirty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	954 x 224 x 16

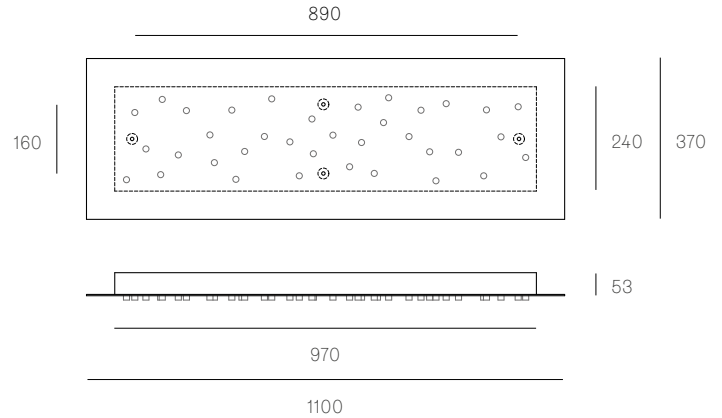


XXX.36 ROUND
SPECIFICATION

Pendants	Thirty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø609 x 16

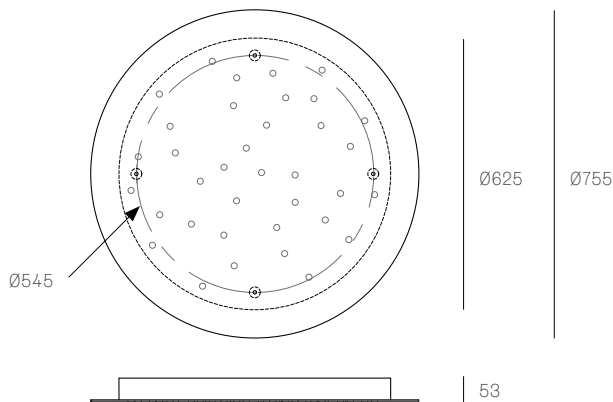

XXX.36 SQUARE
SPECIFICATION


Pendants	Thirty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

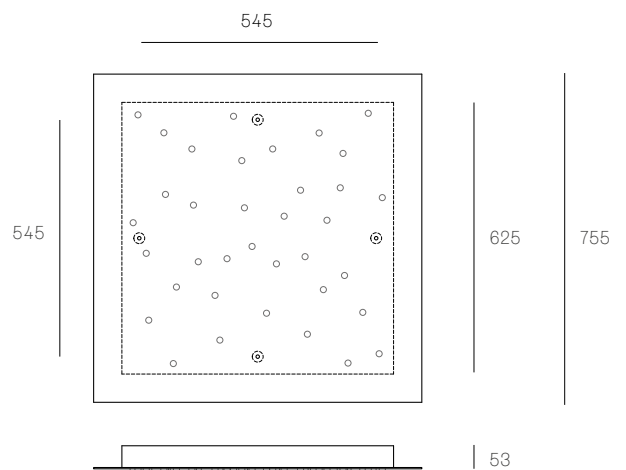

All dimensions are in millimeters (mm) unless otherwise specified.

XXX.50 SQUARE
SPECIFICATION


Pendants	Fifty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

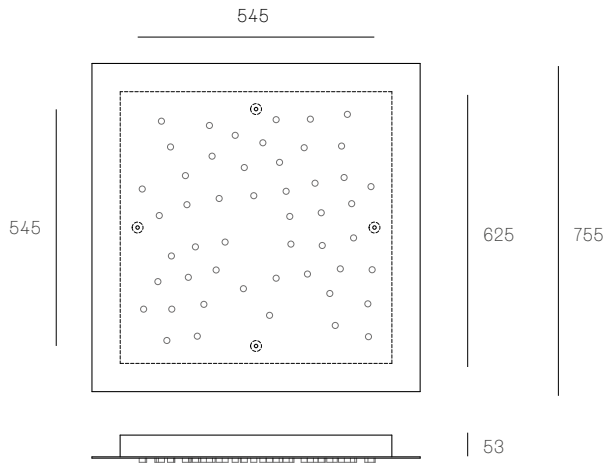

All dimensions are in millimeters (mm)
unless otherwise specified.


XXX.1
SPECIFICATION

Pendant	One
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral Remote for select markets only




XXX.1 DEEP
SPECIFICATION

Pendant	One
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

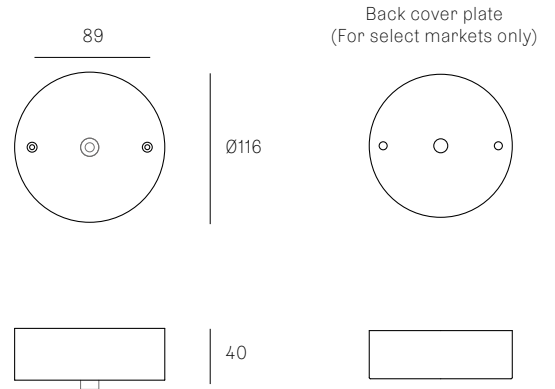


XXX.1M
SPECIFICATION

Pendant	One
Materials	Brushed nickel or white powder coated zinc cover
Cable	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote



XXX.1MI
SPECIFICATION


Pendant	One
Material	White polyurethane
Cable	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote



All dimensions are in millimeters (mm) unless otherwise specified.


XXX.1M0
SPECIFICATION

Pendant	One
Material	White polyurethane
Cable	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote




XXX.3
SPECIFICATION

Pendants	Three
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

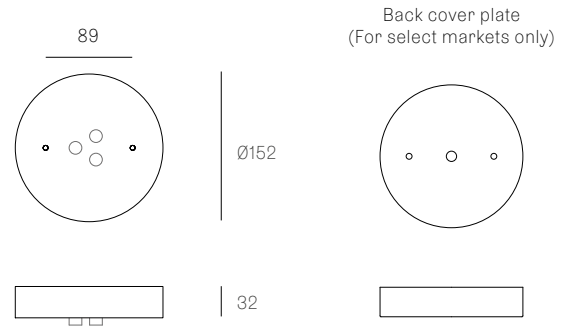

XXX.7
SPECIFICATION


Pendants	Seven
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Sculptural cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

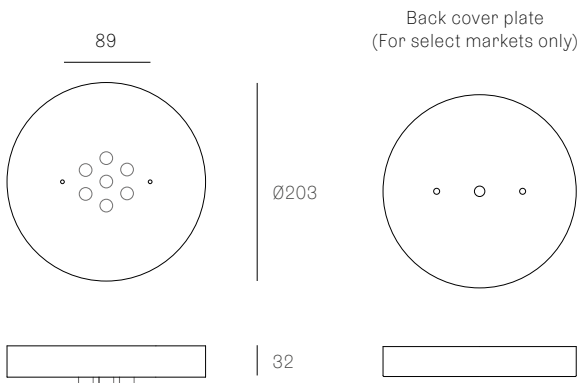

All dimensions are in millimeters (mm)
unless otherwise specified.


XXX.13
SPECIFICATION

Pendants	Thirteen
Material	White powder coated stainless steel cover
Cable	Sculptural cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø250 x 16

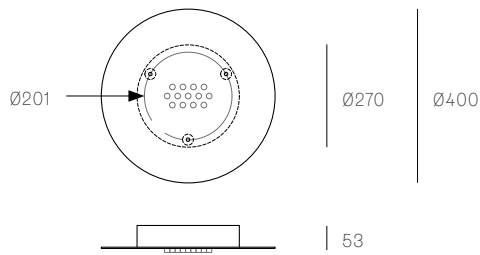


XXX.19
SPECIFICATION

Pendants	Nineteen
Material	White powder coated stainless steel cover
Cable	Sculptural cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø355 x 16

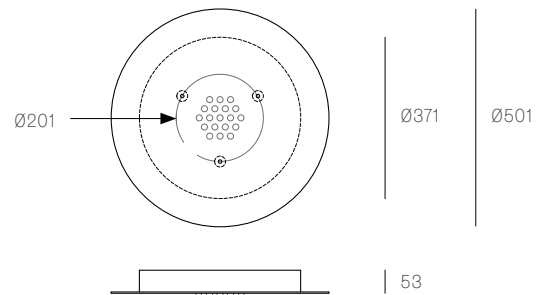


XXX.37
SPECIFICATION

Pendants	Thirty-seven
Material	White powder coated stainless steel cover
Cable	Sculptural cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø454 x 16

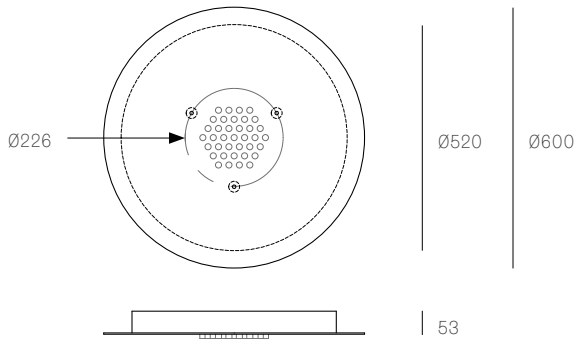

XXX.61
SPECIFICATION

Pendants	Sixty-one
Material	White powder coated stainless steel cover
Cable	Sculptural cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø561 x 16

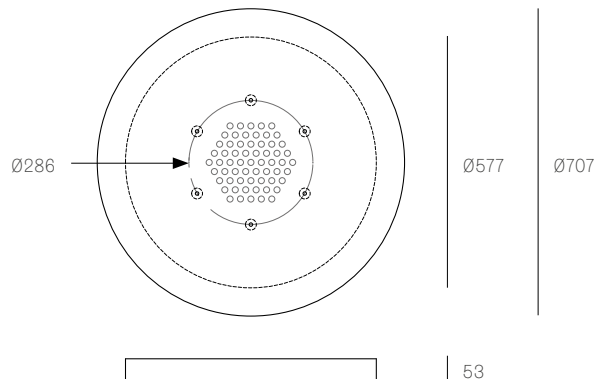

All dimensions are in millimeters (mm) unless otherwise specified.