

Image shown above 28.6 Ceiling Mounted

Series 28, 38V, 57, 73, 84, 84V

Mounting Ceiling mounted

Glass Colours 28: Clear, colour pendants
38V: Clear
57: Grey, white, light mirror, dark mirror
73: Clear, grey 1, grey 2, grey 3
84: Clear/copper
84V: Clear/copper

Lamp 1.5W LED, 2500K, 130lm

Stem Lengths 900mm, 1800mm, 2700mm, 3700mm long stem

Extenders Additional extender available in 153mm, 305mm, 914mm, 1524mm

Finishes Brass or black powder coated stem
Brass or matte black canopy

Materials Blown glass, brass stem, electrical components

Power Supply Integral, except for XXX.12 stem
Bocci recommends remote mounting power supplies for ease of long-term maintenance.

Environment Indoor, dry location. IP20

Note The brass used in our Stem Series is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment.

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.


Patent # 28: US D687,740
EU 001695834-001 to 004
38V: EU 002071019-001
57: US D796732
EU 002268581-0001 to 0006
73: US D762,323 S
EU 002633230-0001 - 0003
84: EU 003611144-0001 to 0004

Certifications



Weight (kg)

	XXX.3 (900mm)	XXX.3 (1800mm)	XXX.6 (1800mm)	XXX.9 (2700mm)	XXX.12 (3700mm)
28	4.7	5.7	9.4	15.1	18.8
38V	7.1	8.2	14.3	22.5	28.6
57	5.2	6.3	10.5	16.7	21
73	6.2	8.9	15.7	25.5	36.8
84	6.5	7.5	12.9	20.4	25.9
84V	7.4	8.4	14.8	23.3	29.7

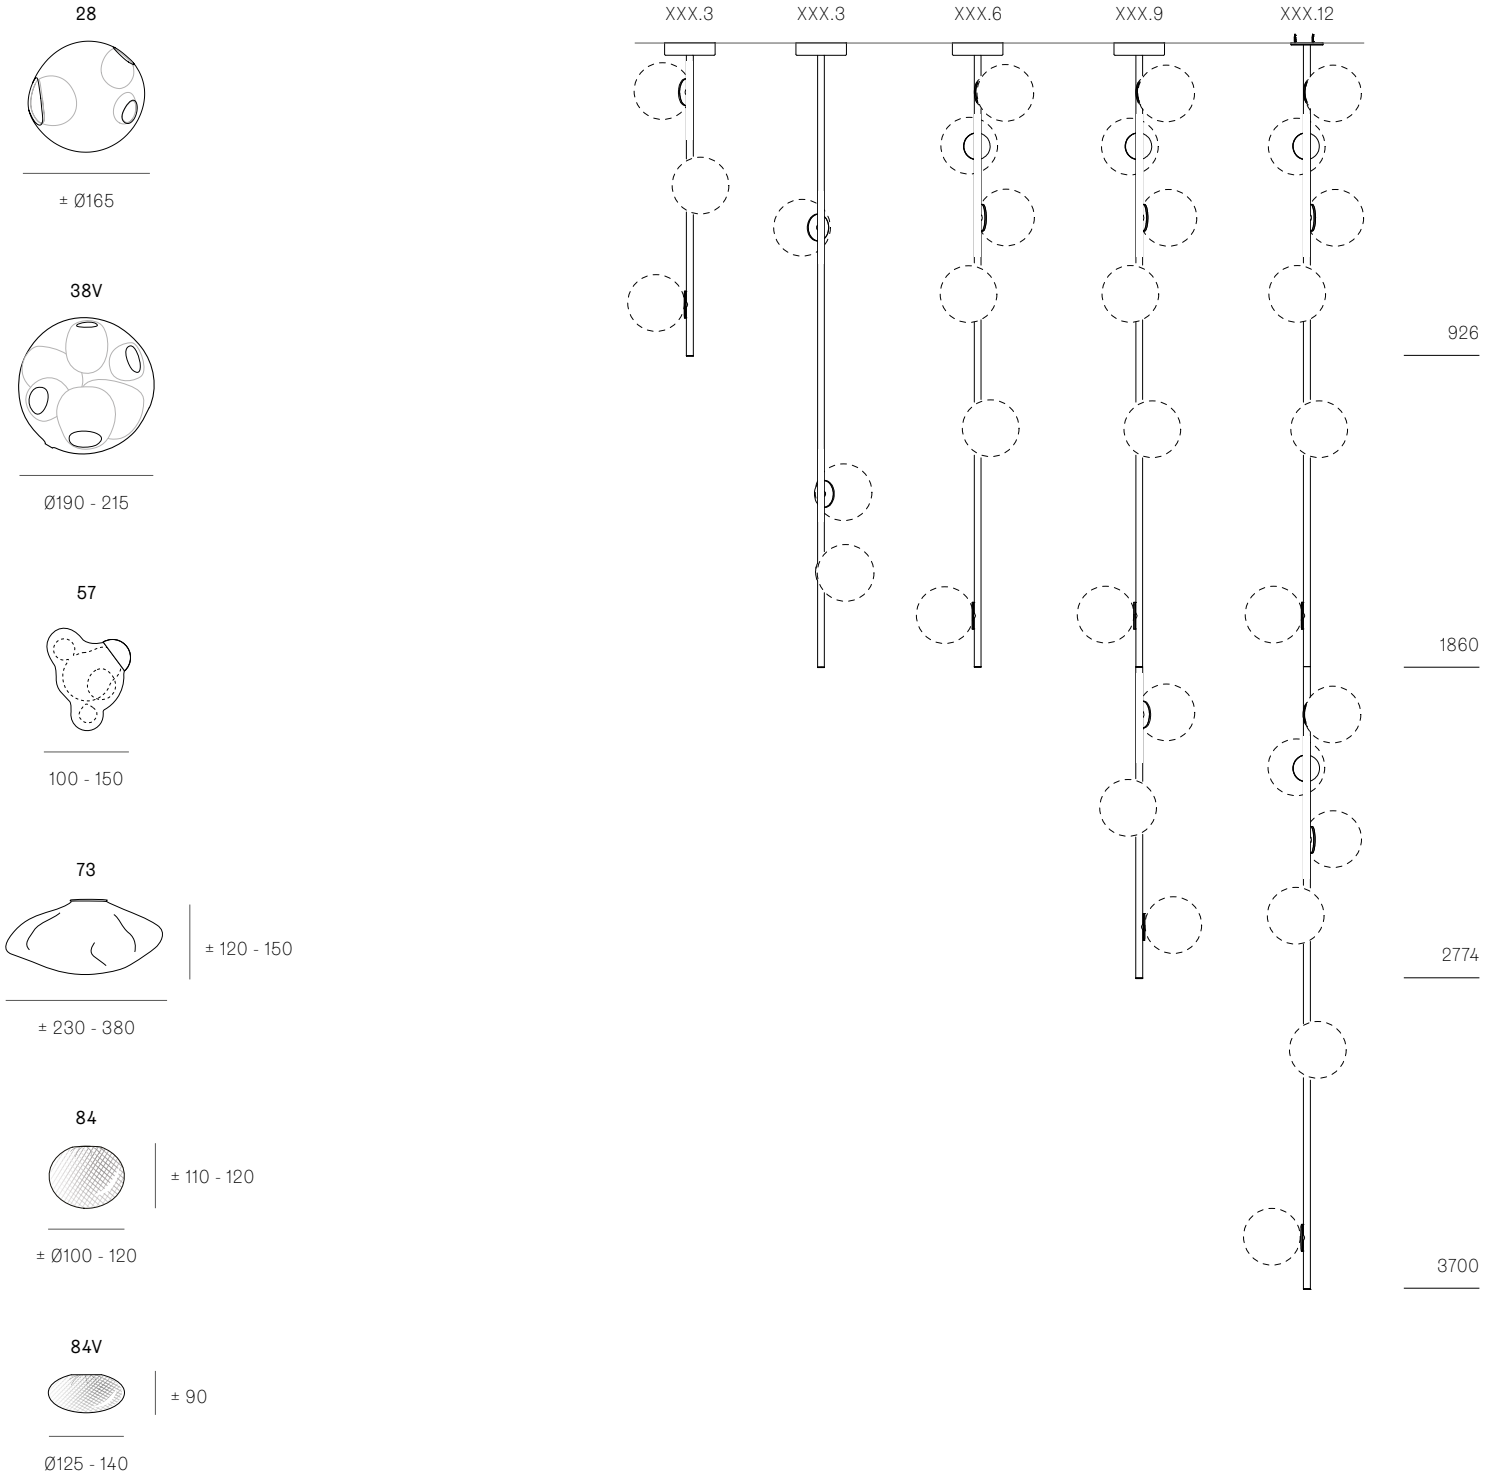

All dimensions are in millimeters (mm) unless otherwise specified.

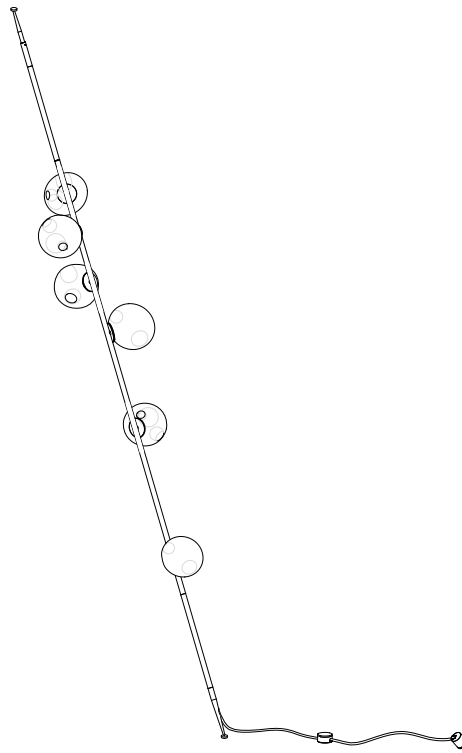


Image shown above 28.6 Column


Series	28, 38V, 57, 73, 84, 84V
Glass Colours	28: Clear, colour pendants 38V: Clear 57: Grey, white, light mirror, dark mirror 73: Clear, grey 1, grey 2, grey 3 84: Clear/copper 84V: Clear/copper
Lamp	1.5W LED, 2500K, 130lm
Plug Types	Type A - 110V Type C - 230V Type G - 230V Type I - 230V
Pole Lengths	2400mm, 2700mm, 3000mm
Extenders	Additional extender available in 153mm, 305mm
Cable Length	2290mm black flexible cord
Finishes	Brass or black powder coated stem Brass dial control
Materials	Blown glass, brass stem, electrical components
Power Supply	Integral, dial control with build-in dimmer
Environment	Indoor, dry location. IP20
Note	The brass used in our Stem Series is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

Patent #	28: US D687,740 EU 001695834-001 to 004 38V: EU 002071019-001 57: US D796732 EU 002268581-0001 to 0006 73: US D762,323 S EU 002633230-0001 - 0003 84: EU 003611144-0001 to 0004
-----------------	--




Weight (kg)		XXX.3	XXX.6
	28	7	11
	38V	10	16
	57	8	12
	73	10	17
	84	9	14
	84V	10	16

28



± Ø165

38V




Ø190 - 215

57



100 - 150

73



± 120 - 150

± 230 - 380

84



± 110 - 120


± Ø100 - 120

84V



± 90


Ø125 - 140

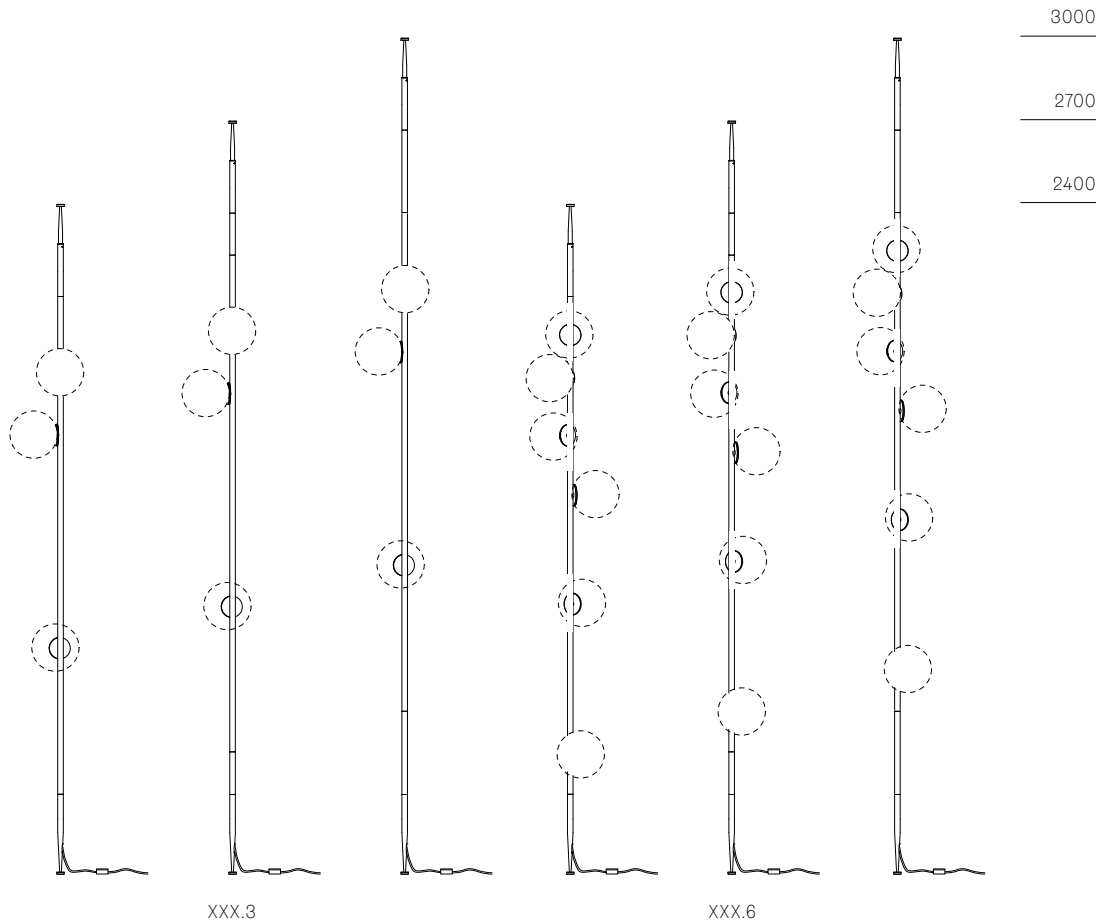


PLUG TYPES



Type A



Type C



Type G





Type I

All dimensions are in millimeters (mm) unless otherwise specified.

This diagram is meant to illustrate the extender combinations for the columnar stem fixtures.

Maximum 2 extenders per end.

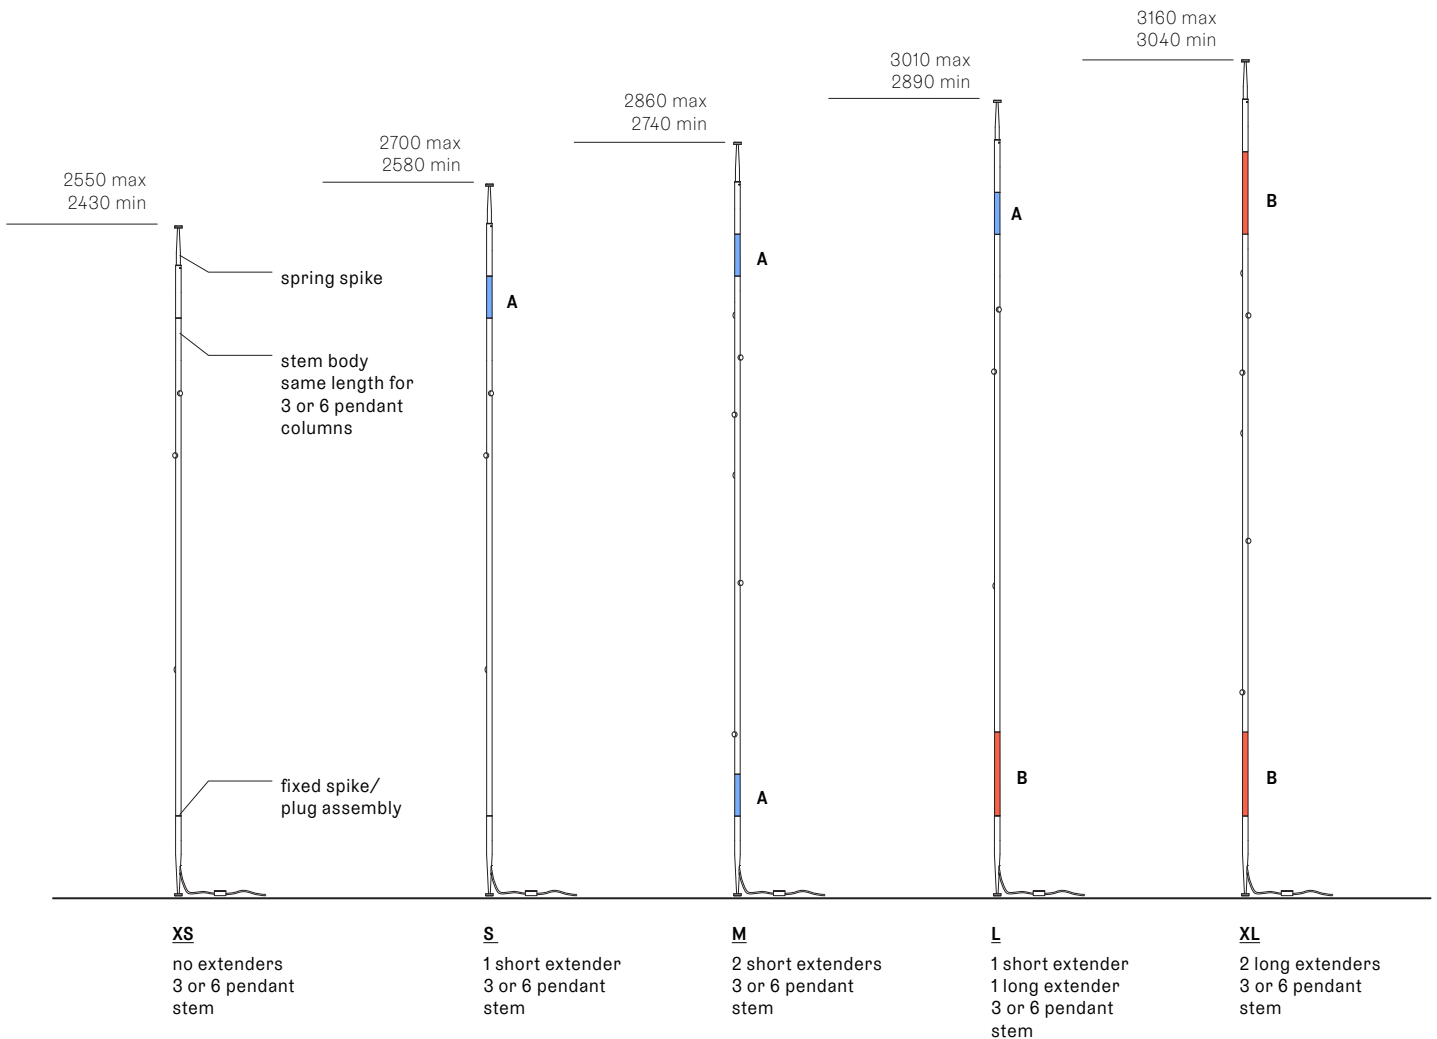

All dimensions are in millimeters (mm) unless otherwise specified.

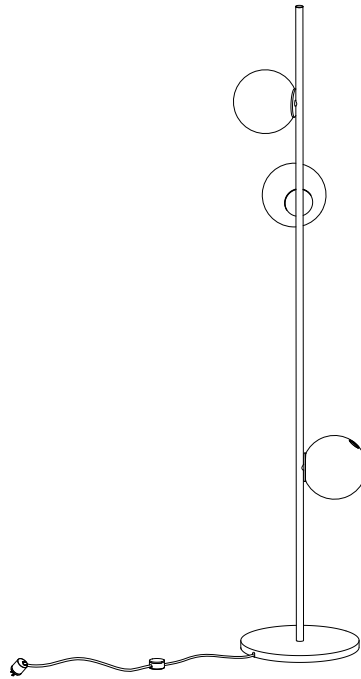


Image shown above 28.6 Floor


Series	28, 38V, 57, 73, 84, 84V
Glass Colours	28: Clear, colour pendants 38V: Clear 57: Grey, white, light mirror, dark mirror 73: Clear, grey 1, grey 2, grey 3 84: Clear/copper 84V: Clear/copper
Lamp	1.5W LED, 2500K, 130lm
Plug Types	Type A - 110V Type C - 230V Type G - 230V Type I - 230V
Stem Lengths	900mm, 1800mm long stem
Base	Ø330mm
Cable Length	2290mm black flexible cord
Finishes	Brass or black powder coated stem Unlacquered brass or black powder coated base Brass dial control
Materials	Blown glass, brass stem, electrical components
Power Supply	Integral, dial control with build-in dimmer
Environment	Indoor, dry location. IP20
Note	The brass used in our Stem Series is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

Patent #	28: US D687,740 EU 001695834-001 to 004 38V: EU 002071019-001 57: US D796732 EU 002268581-0001 to 0006 73: US D762,323 S EU 002633230-0001 - 0003 84: EU 003611144-0001 to 0004
-----------------	--




Weight (kg)			
	XXX.3 (900mm)	XXX.3 (1800mm)	XXX.6 (1800mm)
28	9.8	10.8	14.5
38V	12.2	13.2	19.4
57	10.3	11.3	15.6
73	11.3	12.3	17.5
84	11.5	12.6	18
84V	12.5	13.5	19.9

28




± Ø165

38V



Ø190 - 215

57



100 - 150

73



± 120 - 150

± 230 - 380

84



± 110 - 120


± Ø100 - 120

84V



± 90

Ø125 - 140

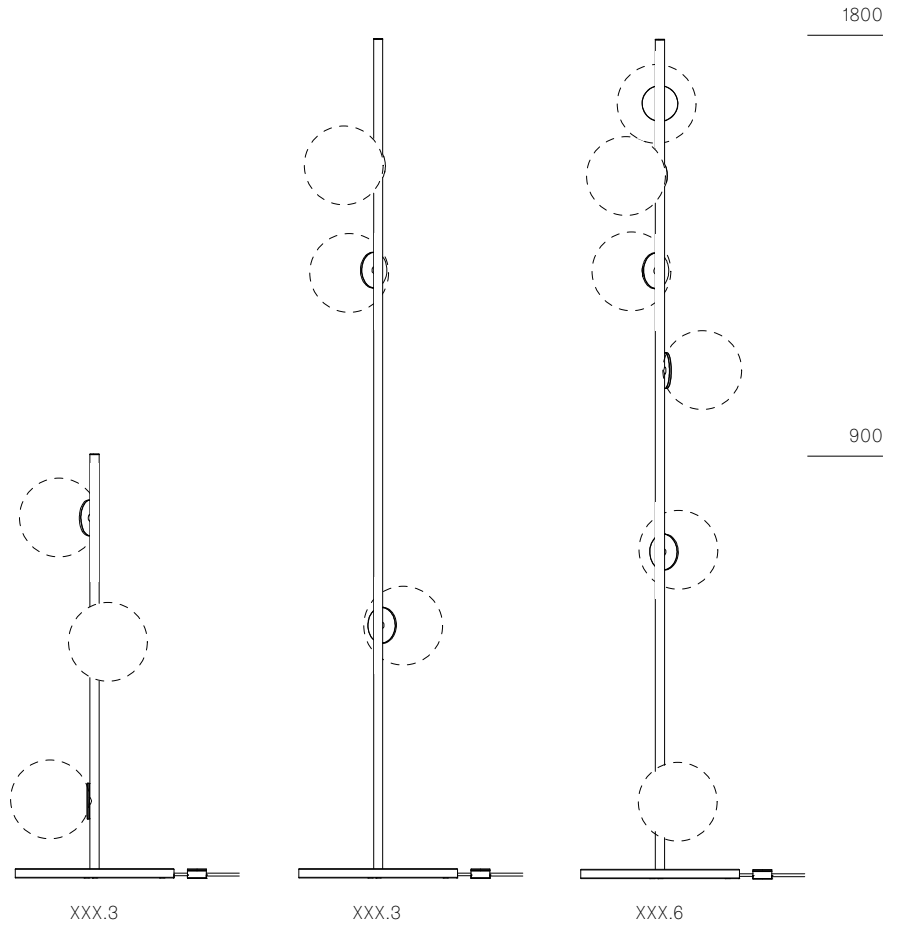


PLUG TYPES



Type A



Type C



Type G



Type I

All dimensions are in millimeters (mm) unless otherwise specified.

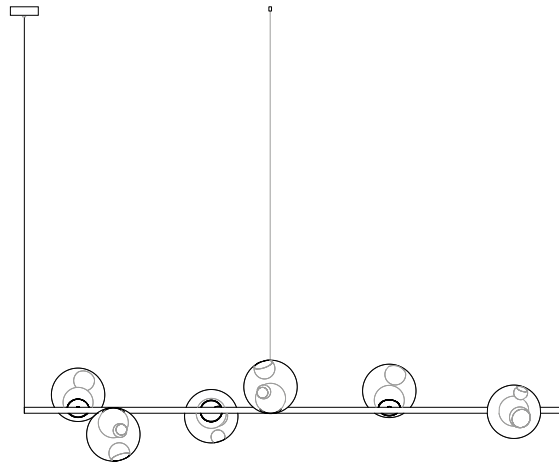


Image shown above 28.6 Horizontal Suspended

Series	28, 38V, 57, 73, 84, 84V
Mounting	Suspended
Glass Colours	28: Clear, colour pendants 38V: Clear 57: Grey, white, light mirror, dark mirror 73: Clear, grey 1, grey 2, grey 3 84: Clear/copper 84V: Clear/copper
Lamp	1.5W LED, 2500K, 130lm
Stem Lengths	900mm, 1800mm long stem
Cable Lengths	3m, 6m, 15m
Finishes	Brass or black powder coated stem Matte black or white canopy
Materials	Blown glass, brass stem, electrical components
Power Supply	Integral Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP20
Note	The brass used in our Stem Series is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.









Patent #	28: US D687,740 EU 001695834-001 to 004 38V: EU 002071019-001 57: US D796732 EU 002268581-0001 to 0006 73: US D762,323 S EU 002633230-0001 - 0003 84: EU 003611144-0001 to 0004
-----------------	--

Certifications



Weight (kg)

	XXX.3 (900mm)	XXX.3 (1800mm)	XXX.6 (1800mm)	XXX.6 vertical (1800mm)
28	4.7	5.7	9.4	8.2
38V	7.1	8.2	14.3	-
57	5.2	6.3	10.5	-
73	6.2	8.9	15.7	-
84	6.5	7.5	12.9	-
84V	7.4	8.4	14.8	-

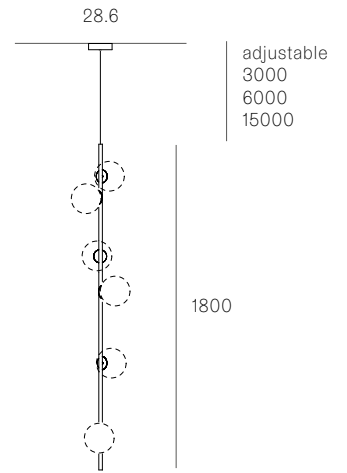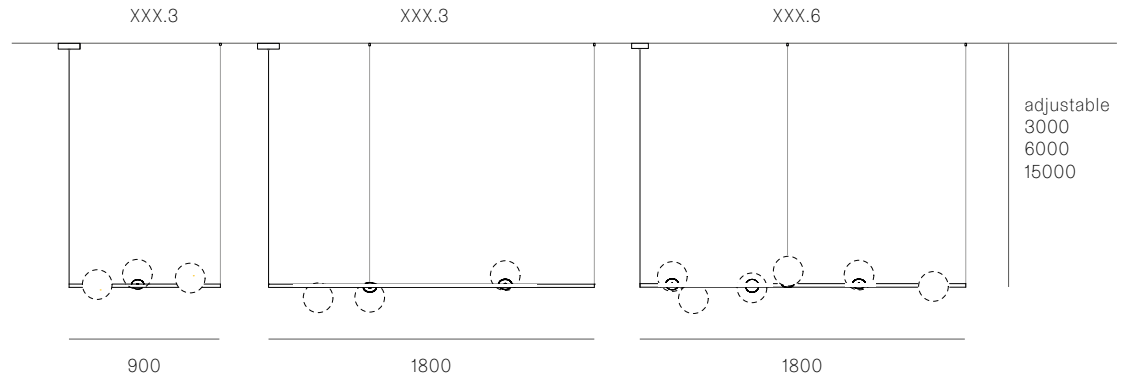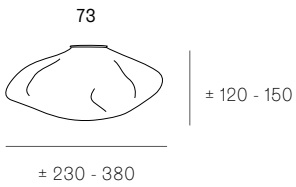

All dimensions are in millimeters (mm) unless otherwise specified.

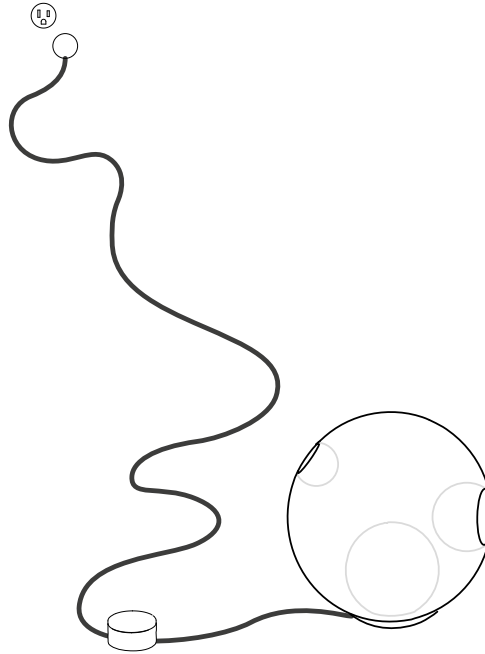


Image shown above 28t

Series 28, 38V, 57, 73, 84, 84V, 100, 118

Glass Colours 28: Clear, colour pendants
 38V: Clear
 57: Grey, white, light mirror, dark mirror
 73: Clear, grey 1, grey 2, grey 3
 84/84Vt: White/copper
 100: Frosted clear, frosted grey
 118: White

Lamp 1.5W LED, 2500K, 130lm
 84/84V, 1.5W LED, 3500K, 130lm

Plug Types Type A - 110V
 Type C - 230V
 Type G - 230V
 Type I - 230V

Base Ø75mm

Cable length 2290mm black flexible cord

Finish Unlacquered brass base and dial control

Materials Glass, brass, electrical components

Power Supply Integral, dial control with build-in dimmer
 Input 100-240V, 0.5A 50-60Hz
 Output 12V
 Ta 25°C

Dimming Built-in dimmer ONLY

Environment Indoor, dry location. IP30

Note The brass used in our Table Light is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

Patent # 28: US D687,740
 EU 001695834-001 to 004
 38V: EU 002071019-001
 57: US D796732
 EU 002268581-0001 to 0006
 73: US D762,323 S
 EU 002633230-0001 - 0003
 84: EU 003611144-0001 to 0004
 100: US Patent pending
 EU 008526131-0001
 118: Worldwide patents pending


Certifications




Weight (kg)

28t	1	84t	2
38Vt	2.5	84Vt	2
57t	2	100t	4
73t	2.7	118t	3.6


PLUG TYPES




Type A



Type C




Type G



Type I


TABLE LIGHT

± Ø165

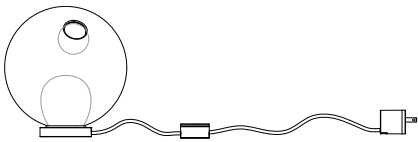


28t

Ø190 - 215

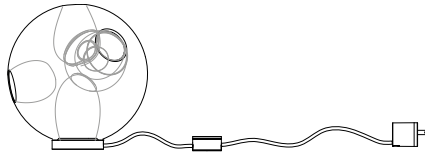


38Vt

100 - 150




57t

± 230 - 380




73t

± Ø100 - 120




84t

± Ø135



84Vt

± 190



100t

± Ø140 - 160mm



118t

All dimensions are in millimeters (mm) unless otherwise specified.





Image shown 84Vs (left), 84Vsp (center), 84Vs Brass (right)


Series	84V
Mounting	Wall mounted
Glass Colour	White/copper
Lamp	1.5W LED, 2500K, 130lm 1.5W LED, 3500K, 160lm 10W Xenon, 2600K, 81lm (84Vs & 84Vsp ONLY)
Canopy Finishes	84Vs & 84Vsp: White canopy 84Vs Brass: Brass
Materials	Blown glass, electrical components, steel canopy. Brass canopy for 84s/84Vs Brass.
Power Supply	84Vs & 84Vs Brass: Remote mounted 84Vsp: Integral Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	84Vs/sp: Indoor/outdoor, wet location. IP55 84Vs Brass: Indoor, dry location. IP30
Note	Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US Patent pending EU 003611144-0001 to 0004

Certifications

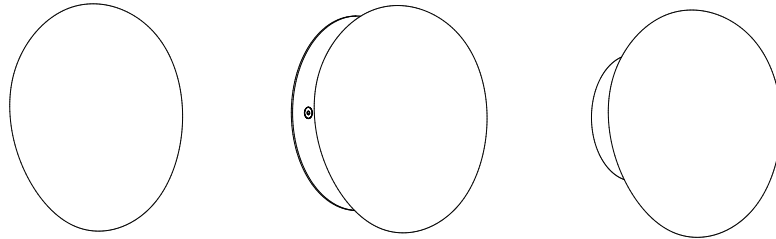


Weight (kg)

84Vs	2
84Vsp	2
84Vs Brass	2.5

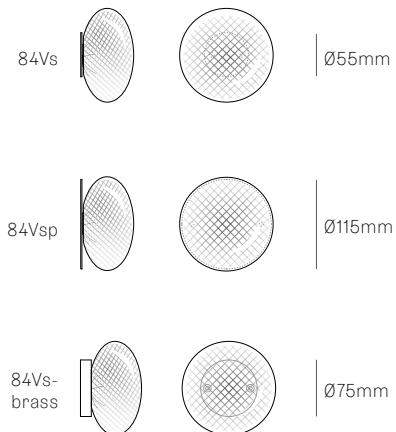


XXXT
SPECIFICATION

- Pendant** One
- Material** Brass base and dial control
- Cable** Black flexible cord, 2290mm
- Plug Type** Type A - 110V
Type C - 230V
Type G - 230V
Type I - 230V

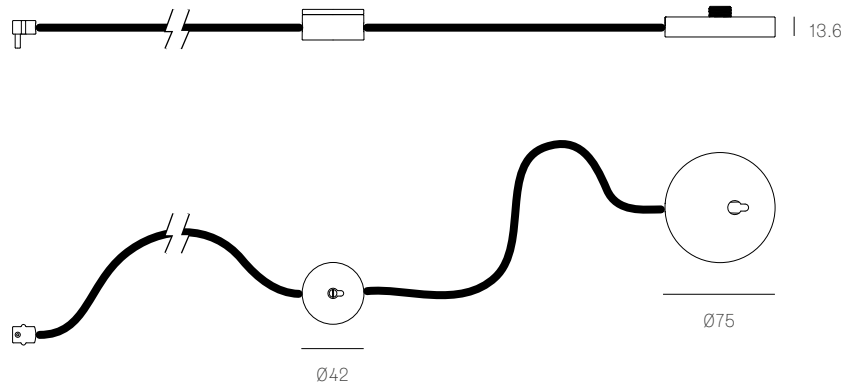

44T
SPECIFICATION


- Pendant** One
- Material** Black base and dial control
- Cable** Black flexible cord, 2290mm
- Plug Type** Type A - 110V
Type C - 230V
Type G - 230V
Type I - 230V

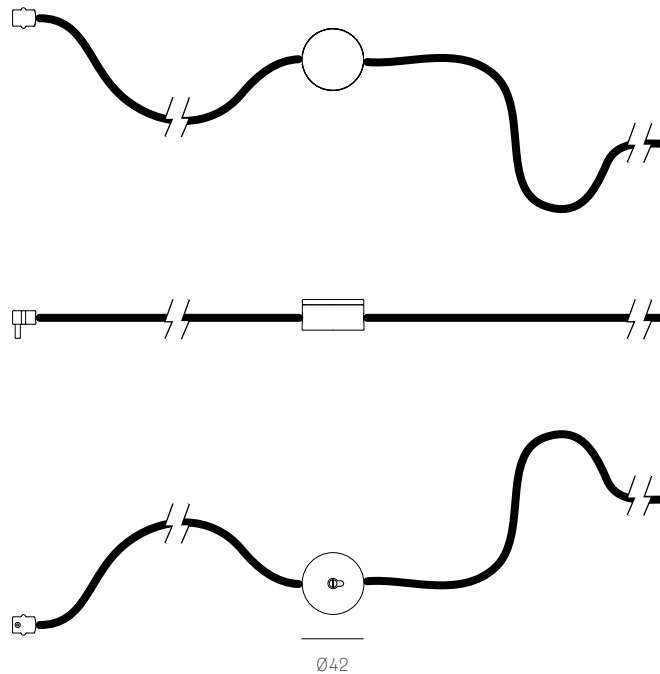

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.3 - XXX.9 CEILING MOUNTED SPECIFICATION

Materials Brass or black stainless steel cover
Power Supply Integral

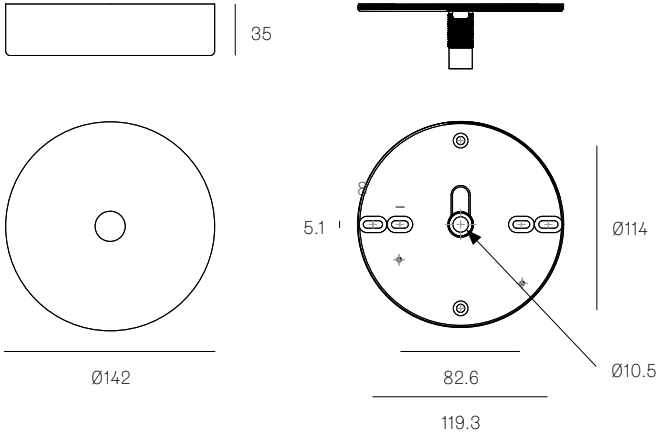


XXX.12 CEILING MOUNTED SPECIFICATION

Materials Brass, black, or white powder coated stainless steel cover
Power Supply Remote

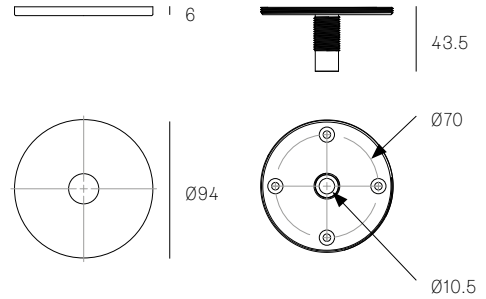


XXX.3 - XXX.6 CABLE SUSPENDED SPECIFICATION

Materials Black or white powder coated stainless steel cover
Coaxial Cable Adjustable. 3000mm, 6000mm, or 15000mm
Power Supply Integral

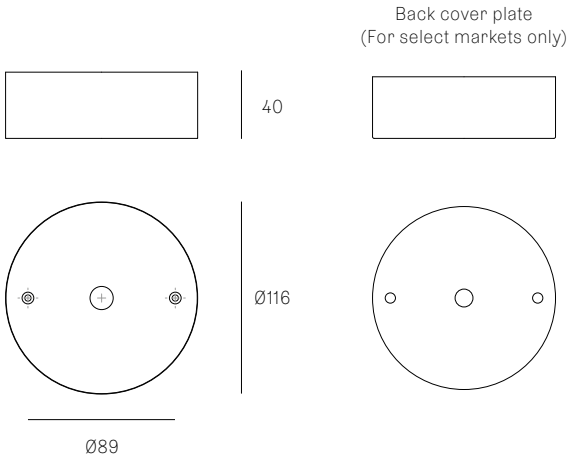

XXX.3 - XXX.6 FLOOR SPECIFICATION


Materials Brass or black powder coated base
Cable Black flexible cord, 2290mm
Plug Type Type A - 110V
 Type C - 230V
 Type G - 230V
 Type I - 230V

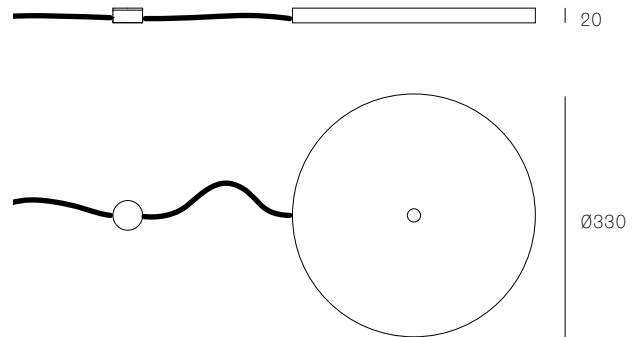

All dimensions are in millimeters (mm) unless otherwise specified.


XXXS
SPECIFICATION

Pendant One
Material White powder coated stainless steel cover
Power Supply Remote




XXXSP
SPECIFICATION

Pendant One
Material White powder coated stainless steel cover
Power Supply Integral
 Remote for select markets only

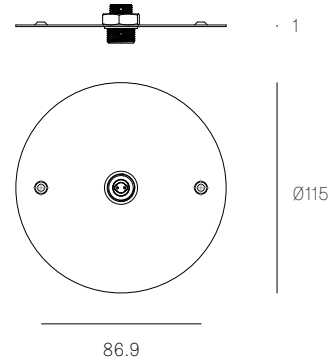


76S
SPECIFICATION

Pendant One
Material White powder coated stainless steel cover
Power Supply Remote

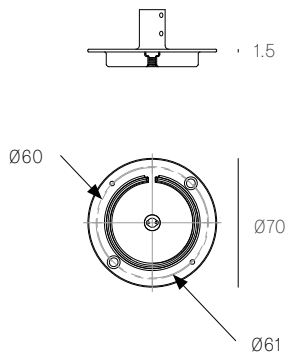

76SP
SPECIFICATION


Pendant One
Material White powder coated stainless steel cover
Power Supply Integral
 Remote for select markets only

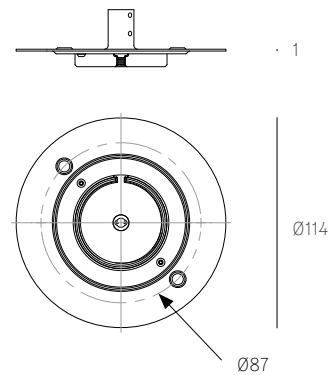

All dimensions are in millimeters (mm) unless otherwise specified.

XXXS BRASS
SPECIFICATION

Pendant	One
Material	Brass base
Power Supply	Remote



All dimensions are in millimeters (mm)
unless otherwise specified.