

± Ø100 - 120mm

Image shown above 84.14 with round canopy

Series	84
Mounting	Ceiling mounted
Glass Colour	Clear
Lamp	1.5W LED, 2500K, 130lm 1.5W LED, 3500K, 160lm 10W Xenon, 2600K, 81lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 84.1 - 84.9 Non-adjustable Length: 84.11 - 84.61
Canopy Finishes	84.1 - 84.7: white, black or brushed nickel canopy 84.1mi/mo: white polyurethane canopy 84.9 - 84.61: white canopy
Materials	Blown glass, copper mesh, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 84.1m/mo/mi Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US Patent pending EU 003611144-0001 to 0004
Certifications	

Weight (kg)



Round



Square


84.1	2	84.11	36.6
84.3	6.5	84.26	69.5
84.5	10.7	84.36	113.4
84.7	15.2		
84.13	29.6		
84.14	40.2		
84.26	67.7		
84.36	91.4		
84.19	45.8	84.9	28.2
84.37	84.8	84.11	36.6
84.61	139	84.14	39.5
		84.20	67.7
		84.26	80
		84.36	91.8



Rectangle




ADJUSTABLE LENGTH

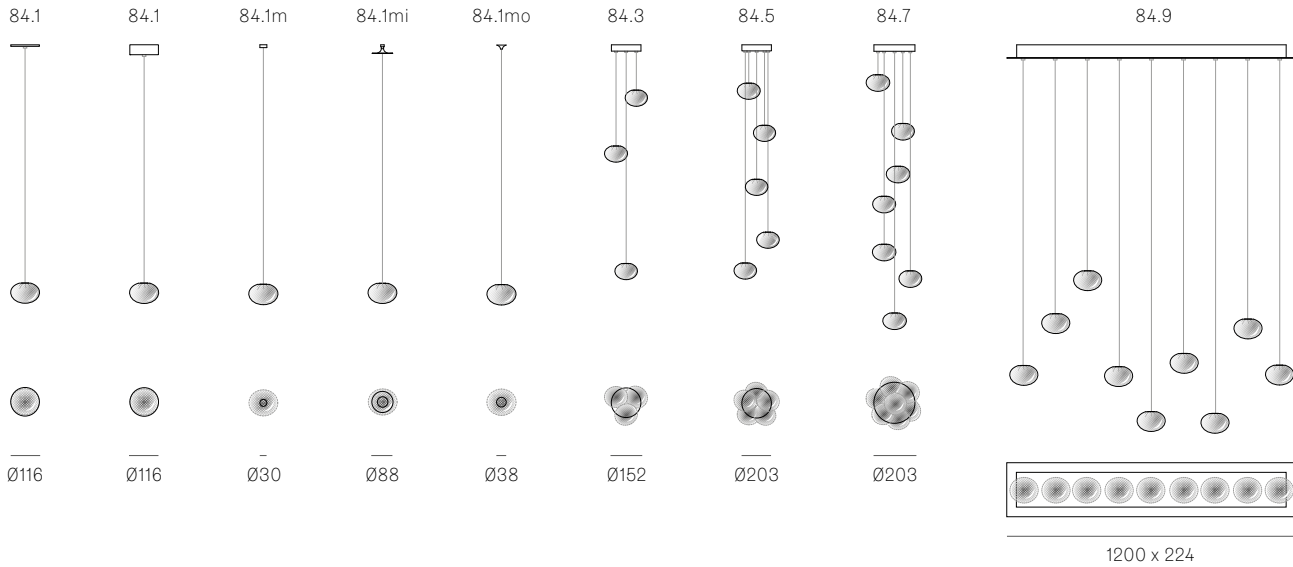

up to 3000 standard
up to 30500 custom

NON-ADJUSTABLE LENGTH

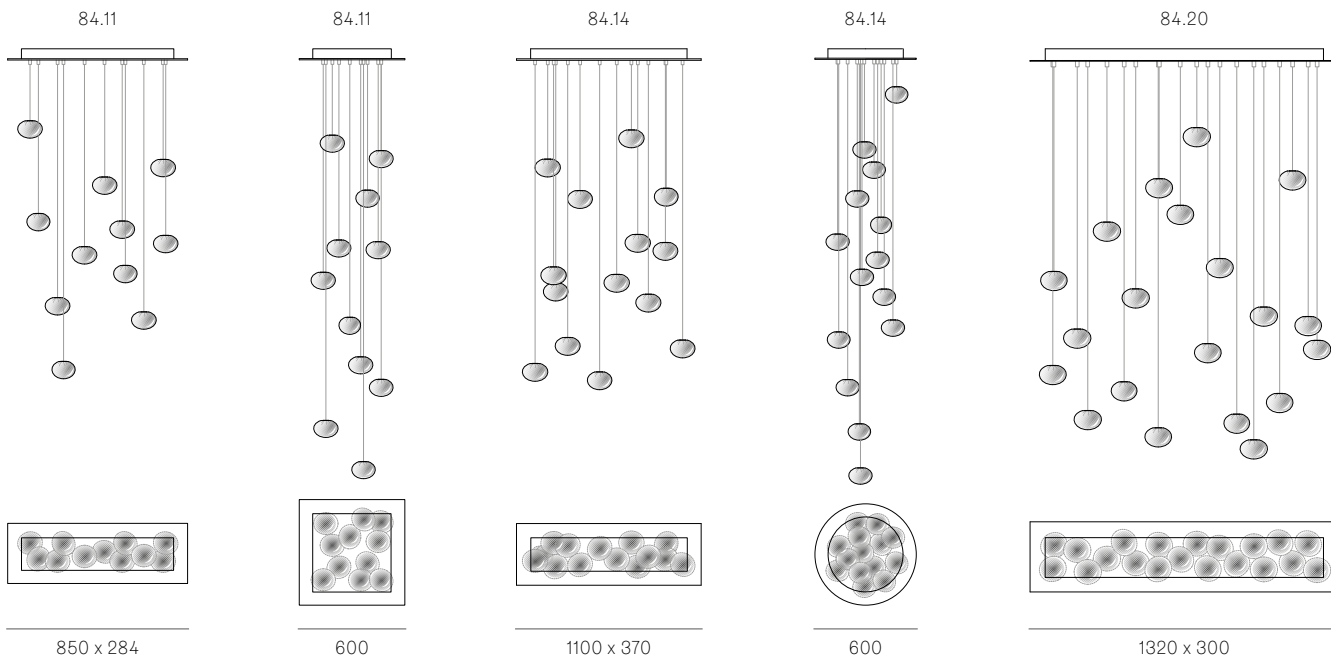


up to 3000 standard
up to 30500 custom

Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.

NON-ADJUSTABLE LENGTH

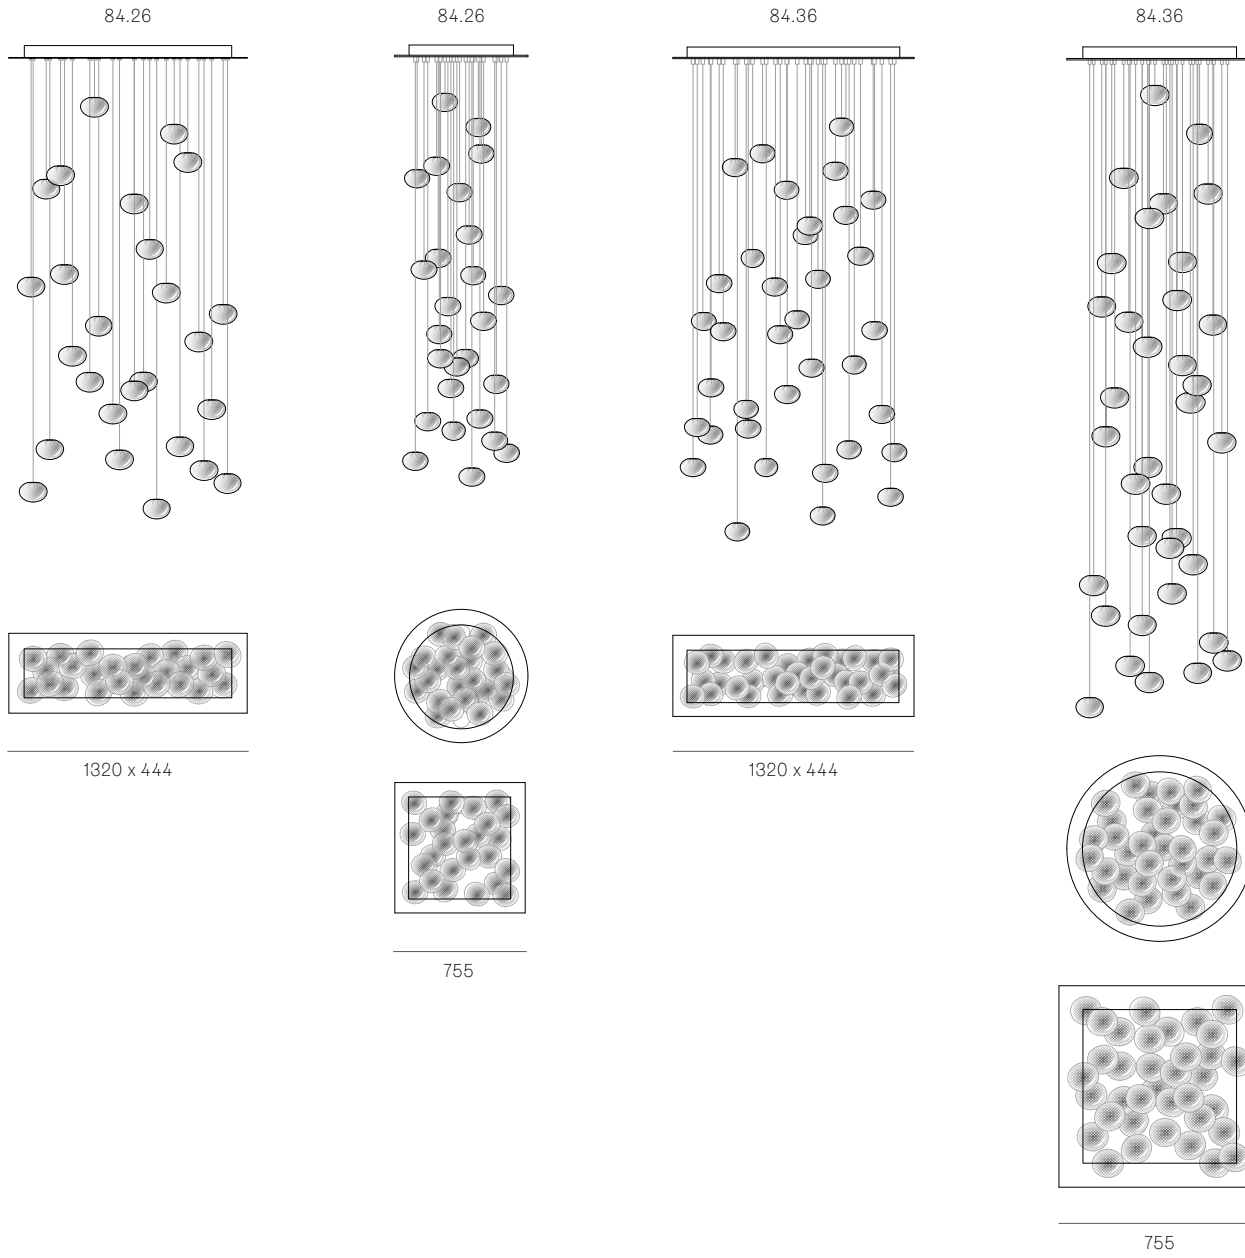

up to 3000
standard
up to 30500
custom

All dimensions are in millimeters (mm) unless otherwise specified.

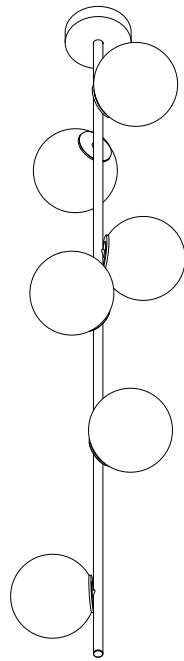


Image shown above 28.6 Ceiling Mounted

Series	28, 38V, 57, 73, 84, 84V
Mounting	Ceiling mounted
Glass Colours	28: Clear, colour pendants 38V: Clear 57: Grey, white, light mirror, dark mirror 73: Clear, grey 1, grey 2, grey 3 84: Clear/copper 84V: Clear/copper
Lamp	1.5W LED, 2500K, 130lm
Stem Lengths	900mm, 1800mm, 2700mm, 3700mm long stem
Extenders	Additional extender available in 153mm, 305mm, 914mm, 1524mm
Finishes	Brass or black powder coated stem Brass or matte black canopy
Materials	Blown glass, brass stem, electrical components
Power Supply	Integral, except for XXX.12 stem Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP20
Note	The brass used in our Stem Series is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment.

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.


Patent #	28: US D687,740 EU 001695834-001 to 004 38V: EU 002071019-001 57: US D796732 EU 002268581-0001 to 0006 73: US D762,323 S EU 002633230-0001 - 0003 84: EU 003611144-0001 to 0004
-----------------	--

Certifications



Weight (kg)

	XXX.3 (900mm)	XXX.3 (1800mm)	XXX.6 (1800mm)	XXX.9 (2700mm)	XXX.12 (3700mm)
28	4.7	5.7	9.4	15.1	18.8
38V	7.1	8.2	14.3	22.5	28.6
57	5.2	6.3	10.5	16.7	21
73	6.2	8.9	15.7	25.5	36.8
84	6.5	7.5	12.9	20.4	25.9
84V	7.4	8.4	14.8	23.3	29.7

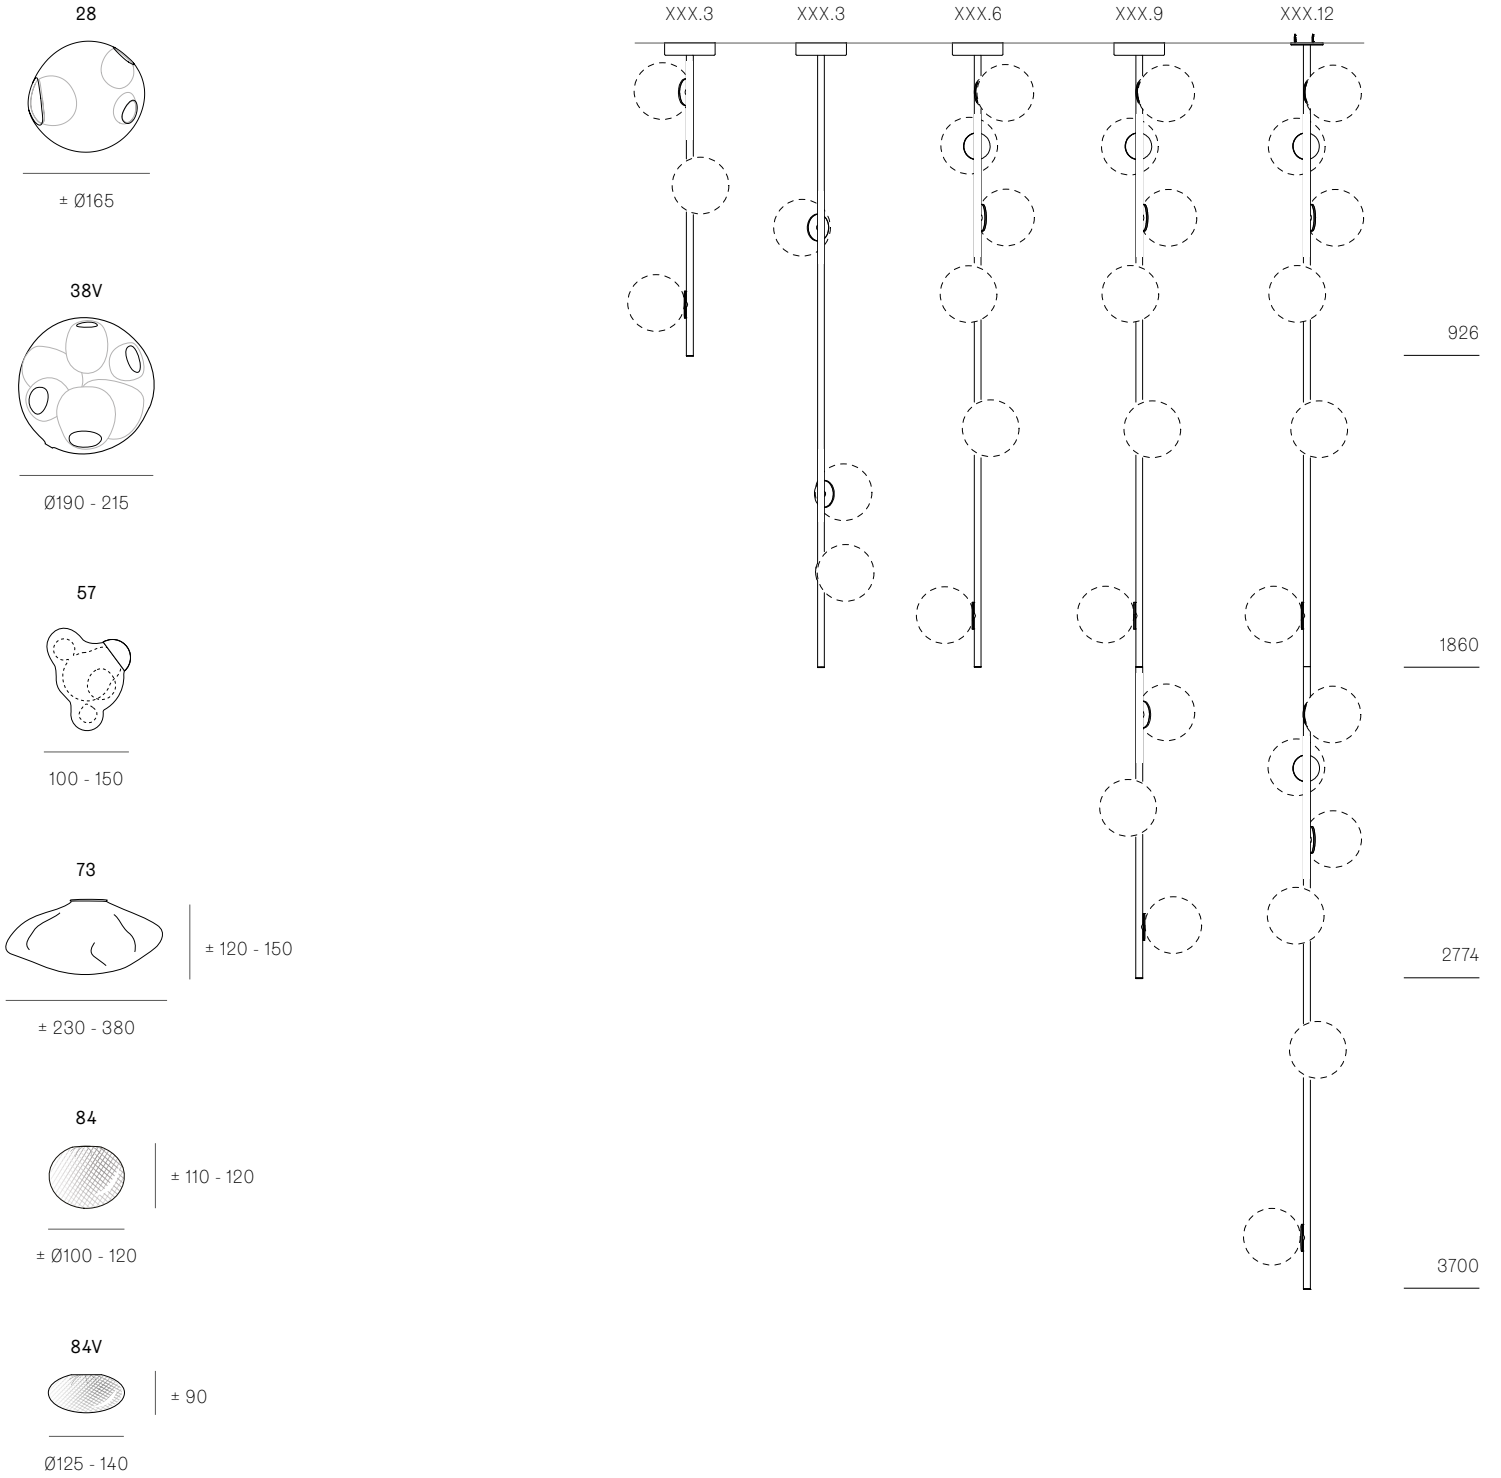

All dimensions are in millimeters (mm) unless otherwise specified.

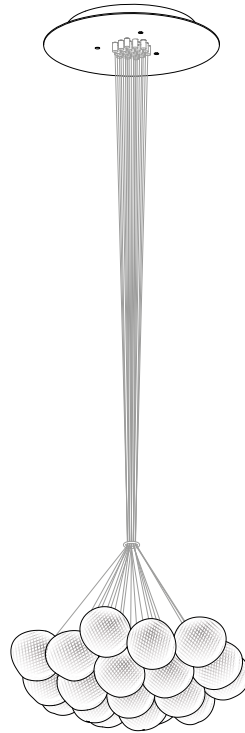


Image shown above 84.19 with round canopy

± Ø100 - 120mm

Series	84
Mounting	Ceiling mounted
Glass Colour	White/copper
Lamp	1.5W LED, 2500K, 130lm 1.5W LED, 3500K, 160lm 10W Xenon, 2600K, 81lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 84.3 - 84.7 Non-adjustable Length: 84.13 - 84.61
Canopy Finishes	84.3 - 84.7: white, black or brushed nickel canopy 84.13 - 84.61: white canopy
Materials	Blown glass, copper mesh, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US Patent pending EU 003611144-0001 to 0004

Weight (kg)



Round

84.3	6.5
84.7	15.2
84.13	29.6
84.19	45.8
84.37	84.8
84.61	139


Certifications




ADJUSTABLE LENGTH

NON-ADJUSTABLE LENGTH


84.3 Cluster




84.7 Cluster




84.13 Cluster

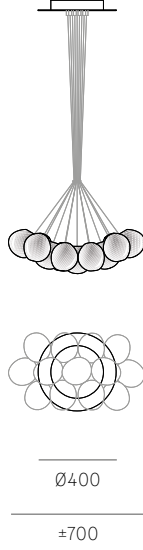


84.19 Cluster

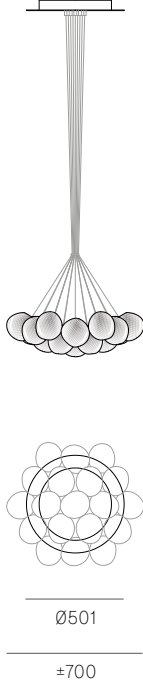

84.37 Cluster

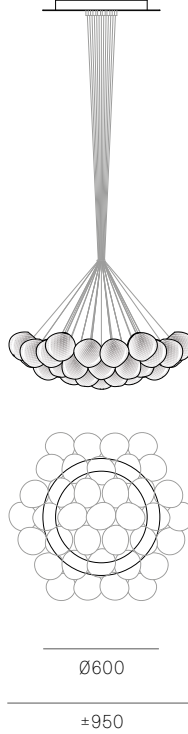

84.61 Cluster

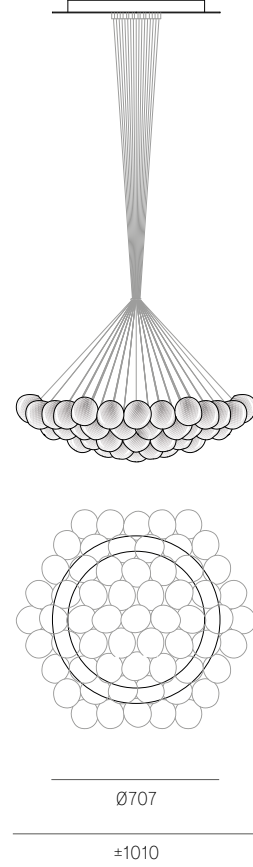


up to 3000 standard
up to 30500 custom

All dimensions are in millimeters (mm) unless otherwise specified.


ADJUSTABLE LENGTH

NON-ADJUSTABLE LENGTH


84.3
Cluster




84.7
Cluster




84.13
Cluster




84.19
Cluster

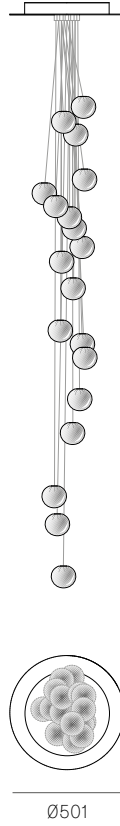

84.37
Cluster

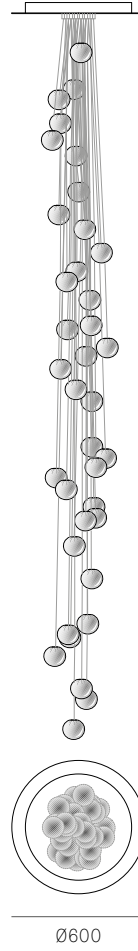

84.61
Cluster

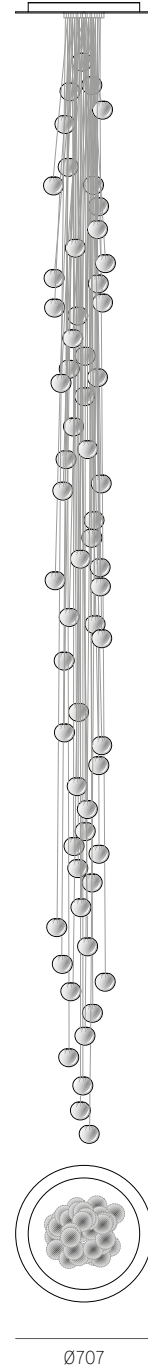

up to 3000
standard
up to 30500
custom

All dimensions are in millimeters (mm)
unless otherwise specified.

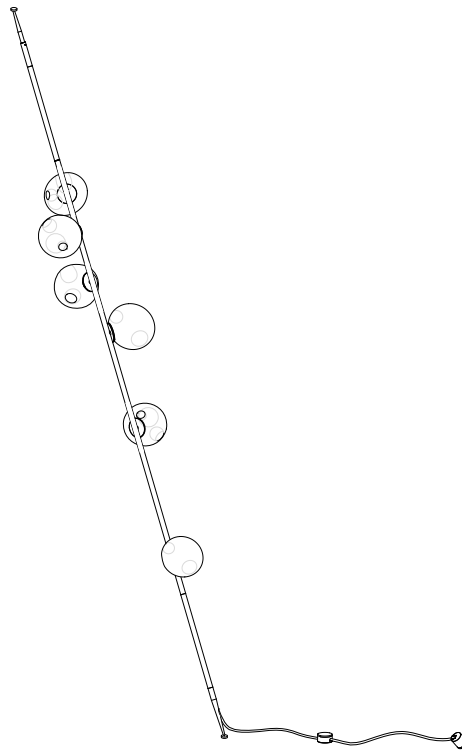


Image shown above 28.6 Column

Series 28, 38V, 57, 73, 84, 84V

Glass Colours 28: Clear, colour pendants
38V: Clear
57: Grey, white, light mirror, dark mirror
73: Clear, grey 1, grey 2, grey 3
84: Clear/copper
84V: Clear/copper

Lamp 1.5W LED, 2500K, 130lm

Plug Types Type A - 110V
Type C - 230V
Type G - 230V
Type I - 230V

Pole Lengths 2400mm, 2700mm, 3000mm

Extenders Additional extender available in 153mm, 305mm

Cable Length 2290mm black flexible cord

Finishes Brass or black powder coated stem
Brass dial control

Materials Blown glass, brass stem, electrical components

Power Supply Integral, dial control with build-in dimmer

Environment Indoor, dry location. IP20

Note The brass used in our Stem Series is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment.

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.


Patent # 28: US D687,740
EU 001695834-001 to 004
38V: EU 002071019-001
57: US D796732
EU 002268581-0001 to 0006
73: US D762,323 S
EU 002633230-0001 - 0003
84: EU 003611144-0001 to 0004

Certifications

Weight (kg)


	XXX.3	XXX.6
28	7	11
38V	10	16
57	8	12
73	10	17
84	9	14
84V	10	16

28




± Ø165

38V



Ø190 - 215

57



100 - 150

73



± 120 - 150

± 230 - 380

84



± 110 - 120


± Ø100 - 120

84V



± 90


Ø125 - 140

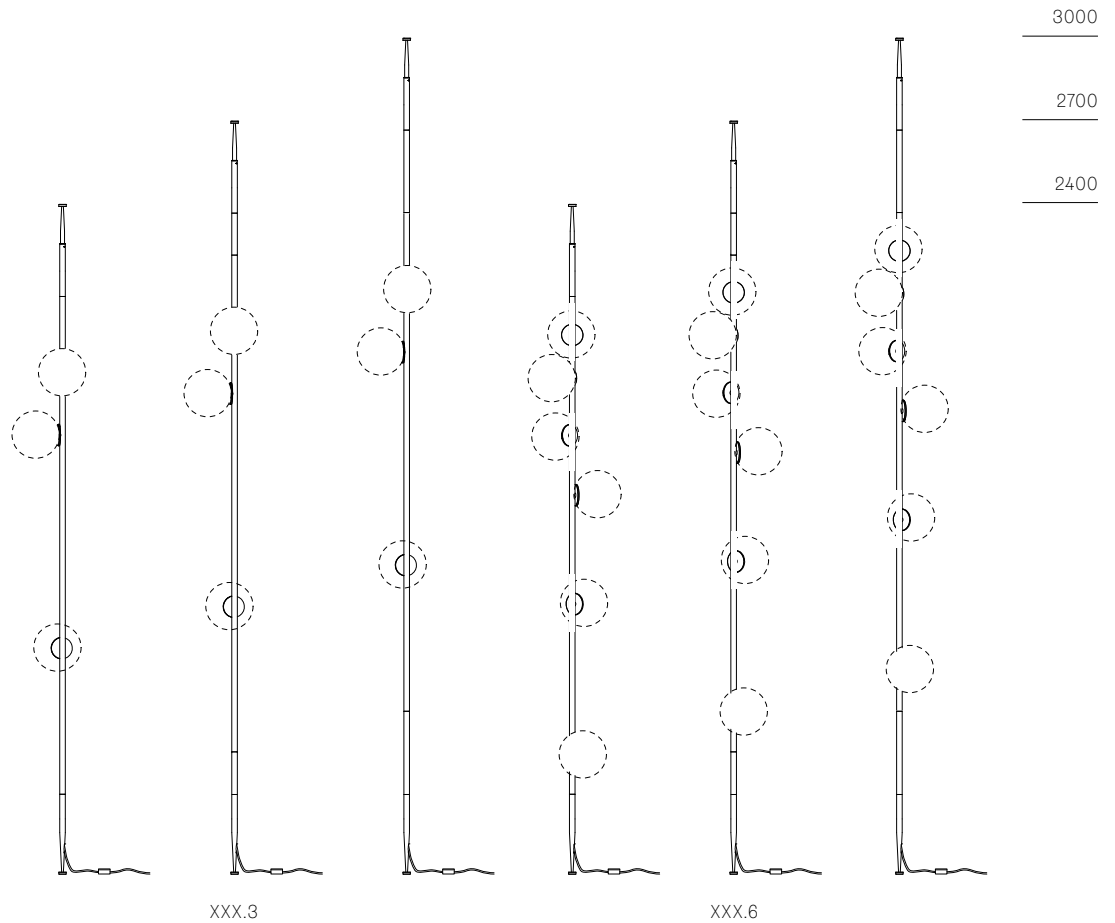


PLUG TYPES



Type A



Type C



Type G





Type I

All dimensions are in millimeters (mm) unless otherwise specified.

This diagram is meant to illustrate the extender combinations for the columnar stem fixtures.

Maximum 2 extenders per end.

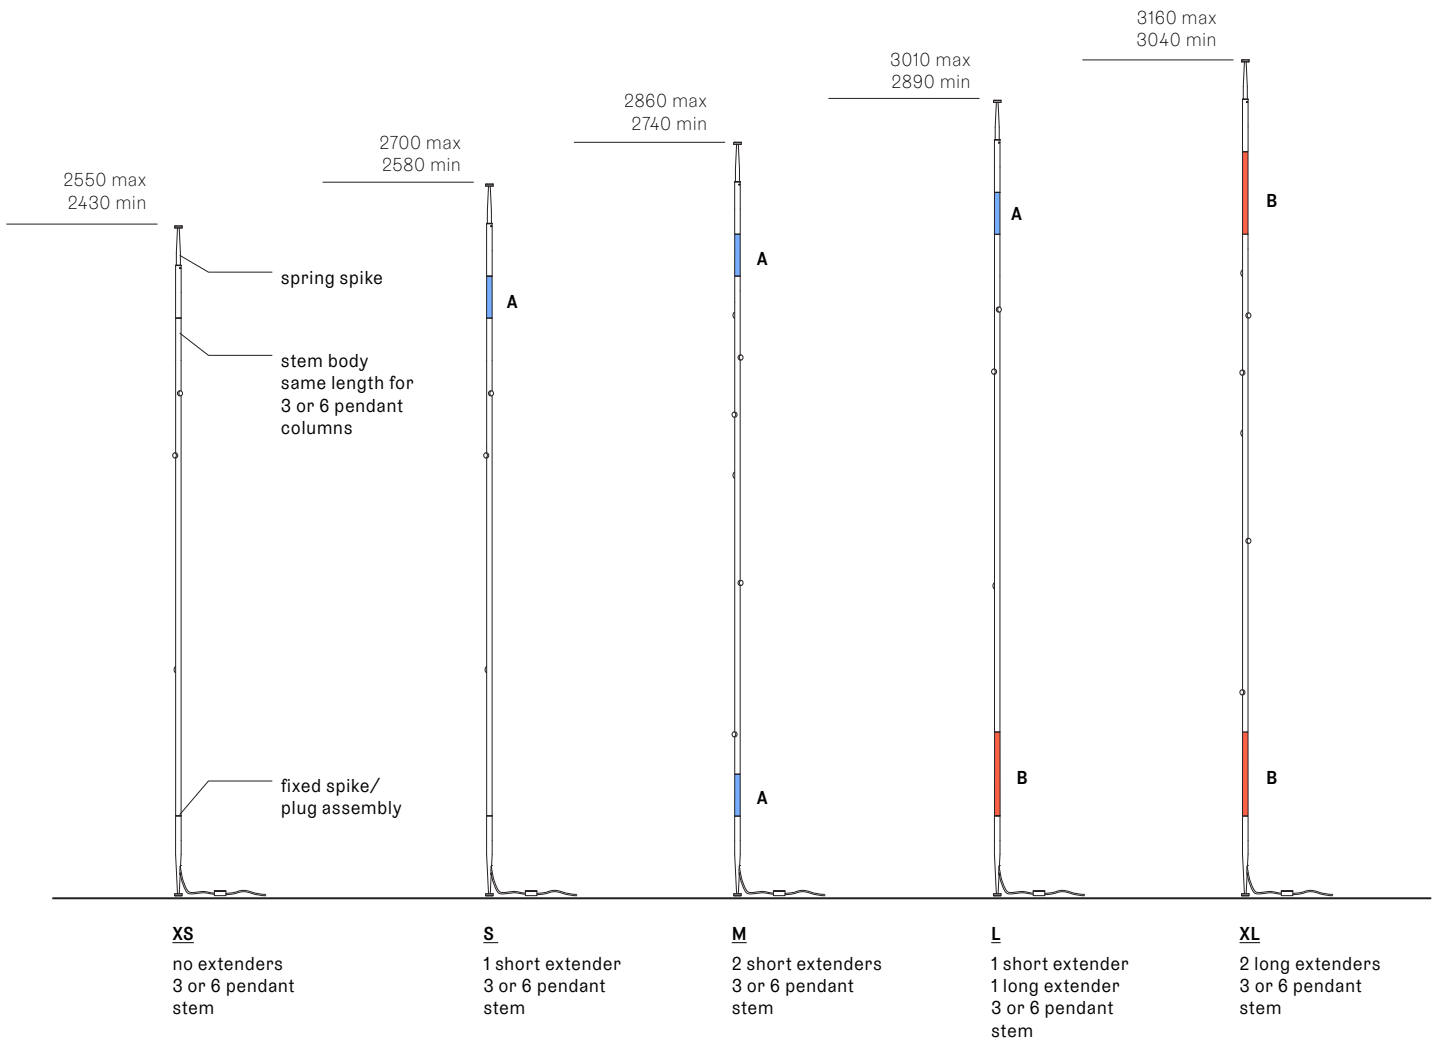

All dimensions are in millimeters (mm) unless otherwise specified.

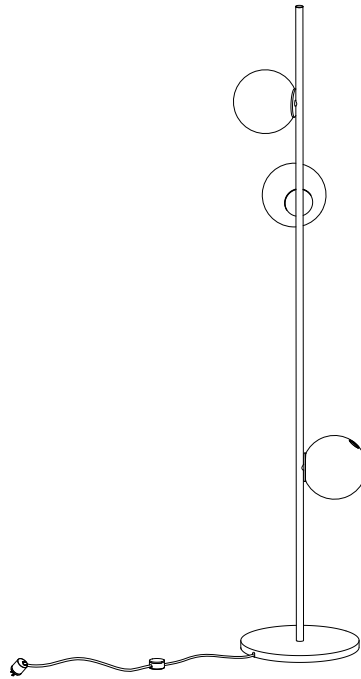


Image shown above 28.6 Floor


Series	28, 38V, 57, 73, 84, 84V
Glass Colours	28: Clear, colour pendants 38V: Clear 57: Grey, white, light mirror, dark mirror 73: Clear, grey 1, grey 2, grey 3 84: Clear/copper 84V: Clear/copper
Lamp	1.5W LED, 2500K, 130lm
Plug Types	Type A - 110V Type C - 230V Type G - 230V Type I - 230V
Stem Lengths	900mm, 1800mm long stem
Base	Ø330mm
Cable Length	2290mm black flexible cord
Finishes	Brass or black powder coated stem Unlacquered brass or black powder coated base Brass dial control
Materials	Blown glass, brass stem, electrical components
Power Supply	Integral, dial control with build-in dimmer
Environment	Indoor, dry location. IP20
Note	The brass used in our Stem Series is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

Patent #	28: US D687,740 EU 001695834-001 to 004 38V: EU 002071019-001 57: US D796732 EU 002268581-0001 to 0006 73: US D762,323 S EU 002633230-0001 - 0003 84: EU 003611144-0001 to 0004
-----------------	--




Weight (kg)		XXX.3 (900mm)	XXX.3 (1800mm)	XXX.6 (1800mm)
	28	9.8	10.8	14.5
	38V	12.2	13.2	19.4
	57	10.3	11.3	15.6
	73	11.3	12.3	17.5
	84	11.5	12.6	18
	84V	12.5	13.5	19.9

28




± Ø165

38V




Ø190 - 215

57



100 - 150

73



± 120 - 150

± 230 - 380

84



± 110 - 120


± Ø100 - 120

84V



± 90


Ø125 - 140

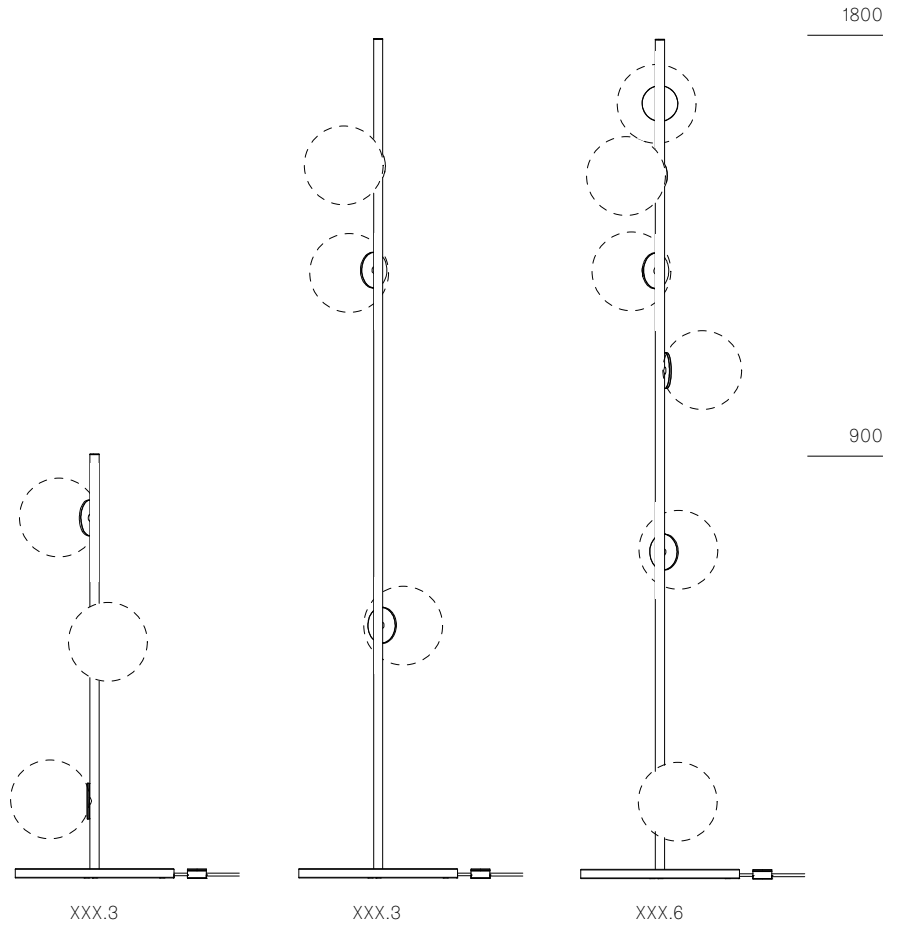


PLUG TYPES



Type A



Type C



Type G



Type I

All dimensions are in millimeters (mm) unless otherwise specified.

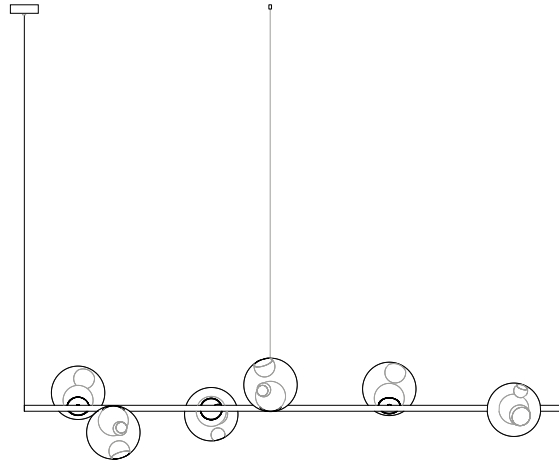


Image shown above 28.6 Horizontal Suspended

Series 28, 38V, 57, 73, 84, 84V

Mounting Suspended

Glass Colours 28: Clear, colour pendants
38V: Clear
57: Grey, white, light mirror, dark mirror
73: Clear, grey 1, grey 2, grey 3
84: Clear/copper
84V: Clear/copper

Lamp 1.5W LED, 2500K, 130lm

Stem Lengths 900mm, 1800mm long stem

Cable Lengths 3m, 6m, 15m

Finishes Brass or black powder coated stem
Matte black or white canopy

Materials Blown glass, brass stem, electrical components

Power Supply Integral
Bocci recommends remote mounting power supplies for ease of long-term maintenance.

Environment Indoor, dry location. IP20

Note The brass used in our Stem Series is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment.









Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

Patent # 28: US D687,740
EU 001695834-001 to 004
38V: EU 002071019-001
57: US D796732
EU 002268581-0001 to 0006
73: US D762,323 S
EU 002633230-0001 - 0003
84: EU 003611144-0001 to 0004



Weight (kg)

	XXX.3 (900mm)	XXX.3 (1800mm)	XXX.6 (1800mm)	XXX.6 vertical (1800mm)
28	4.7	5.7	9.4	8.2
38V	7.1	8.2	14.3	-
57	5.2	6.3	10.5	-
73	6.2	8.9	15.7	-
84	6.5	7.5	12.9	-
84V	7.4	8.4	14.8	-

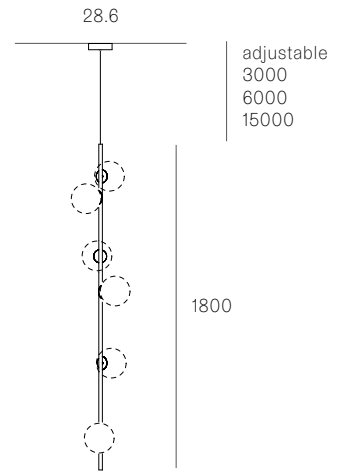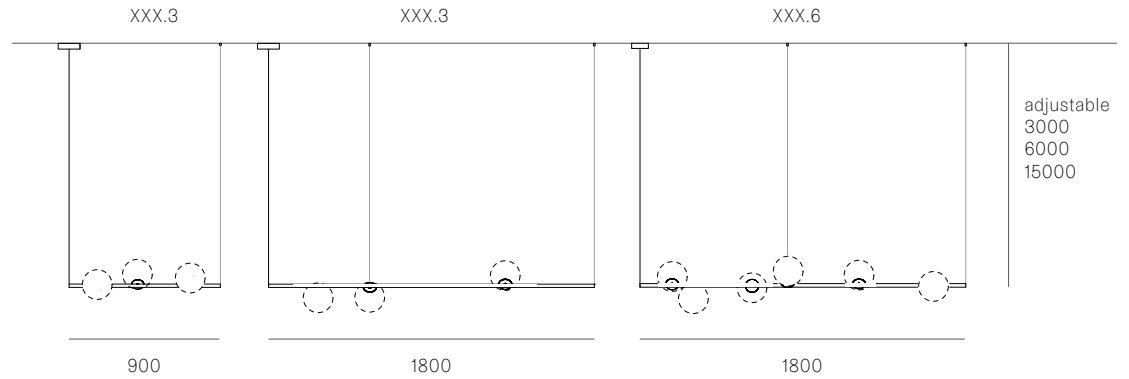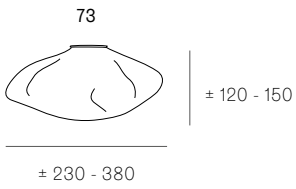

All dimensions are in millimeters (mm) unless otherwise specified.

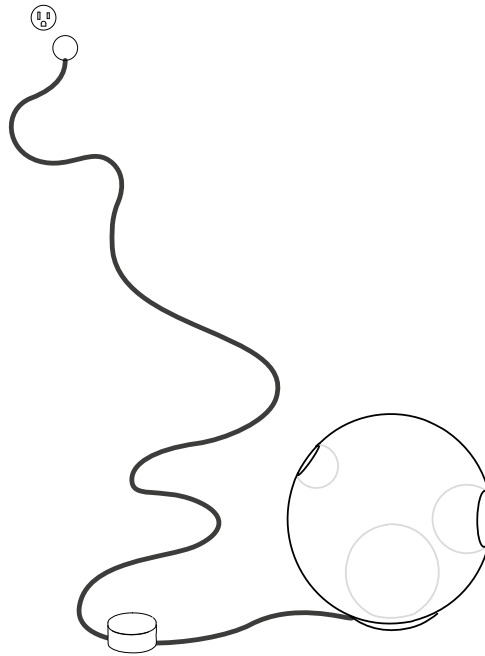


Image shown above 28t

Series 28, 38V, 57, 73, 84, 84V, 100, 118

Glass Colours 28: Clear, colour pendants
 38V: Clear
 57: Grey, white, light mirror, dark mirror
 73: Clear, grey 1, grey 2, grey 3
 84/84Vt: White/copper
 100: Frosted clear, frosted grey
 118: White

Lamp 1.5W LED, 2500K, 130lm
 84/84V, 1.5W LED, 3500K, 130lm

Plug Types Type A - 110V
 Type C - 230V
 Type G - 230V
 Type I - 230V

Base Ø75mm

Cable length 2290mm black flexible cord

Finish Unlacquered brass base and dial control

Materials Glass, brass, electrical components

Power Supply Integral, dial control with build-in dimmer
 Input 100-240V, 0.5A 50-60Hz
 Output 12V
 Ta 25°C

Dimming Built-in dimmer ONLY

Environment Indoor, dry location. IP30

Note The brass used in our Table Light is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.


Patent # 28: US D687,740
 EU 001695834-001 to 004
 38V: EU 002071019-001
 57: US D796732
 EU 002268581-0001 to 0006
 73: US D762,323 S
 EU 002633230-0001 - 0003
 84: EU 003611144-0001 to 0004
 100: US Patent pending
 EU 008526131-0001
 118: Worldwide patents pending

Certifications




Weight (kg)


28t	1	84t	2
38Vt	2.5	84Vt	2
57t	2	100t	4
73t	2.7	118t	3.6

PLUG TYPES


Type A



Type C




Type G



Type I


TABLE LIGHT

± Ø165

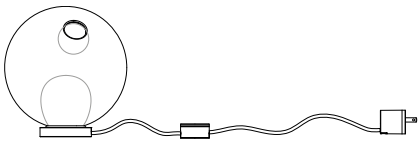


28t

Ø190 - 215

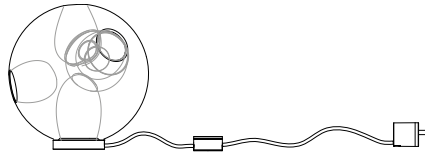


38Vt

100 - 150




57t

± 230 - 380




73t

± Ø100 - 120




84t

± Ø135



84Vt

± 190



100t

± Ø140 - 160mm



118t

All dimensions are in millimeters (mm)
unless otherwise specified.





Image shown 84s (left), 84sp (center), 84s Brass (right)


Series	84
Mounting	Wall mounted
Glass Colour	White/copper
Lamp	1.5W LED, 2500K, 130lm 1.5W LED, 3500K, 160lm 10W Xenon, 2600K, 81lm (84s & 84sp ONLY)
Canopy Finishes	84s & 84sp: White canopy 84s Brass: Brass
Materials	Blown glass, electrical components, steel canopy. Brass canopy for 84s Brass.
Power Supply	84s & 84s Brass: Remote mounted 84sp: Integral Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	84s/sp: Indoor/outdoor, wet location. IP55 84s Brass: Indoor, dry location. IP30
Note	Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US Patent pending EU 003611144-0001 to 0004

Certifications

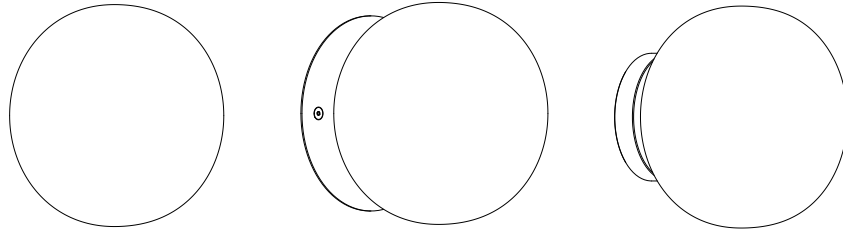


Weight (kg)

84s	2
84sp	2
84s Brass	2.5

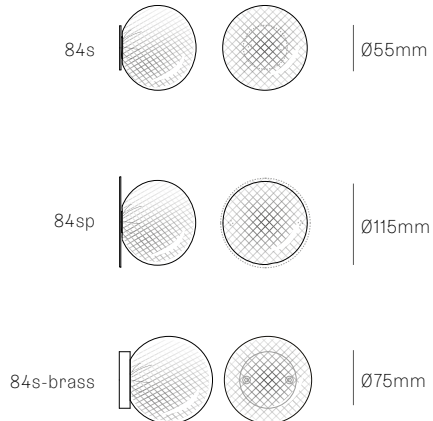


XXX.1
SPECIFICATION

Pendant	One
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral Remote for select markets only




XXX.1 DEEP
SPECIFICATION

Pendant	One
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

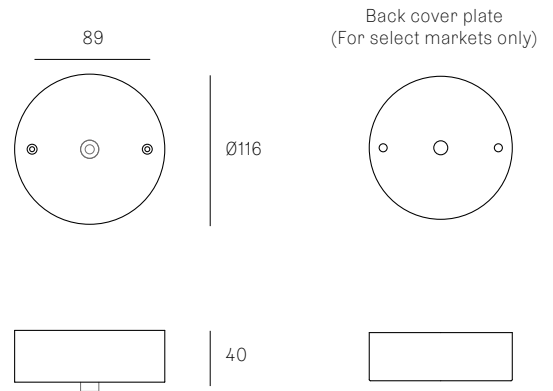


XXX.1M
SPECIFICATION

Pendant	One
Materials	Brushed nickel or white powder coated zinc cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote



XXX.1MI
SPECIFICATION


Pendant	One
Material	White polyurethane
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote



All dimensions are in millimeters (mm) unless otherwise specified.


XXX.1M0
SPECIFICATION

Pendant	One
Material	White polyurethane
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote




XXX.3
SPECIFICATION

Pendants	Three
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

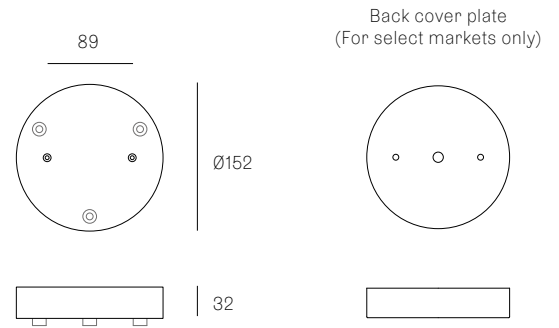


73.3
SPECIFICATION

Pendants	Three
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

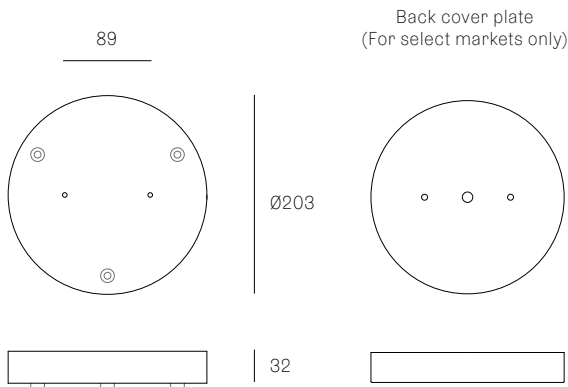

XXX.5
SPECIFICATION


Pendants	Five
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

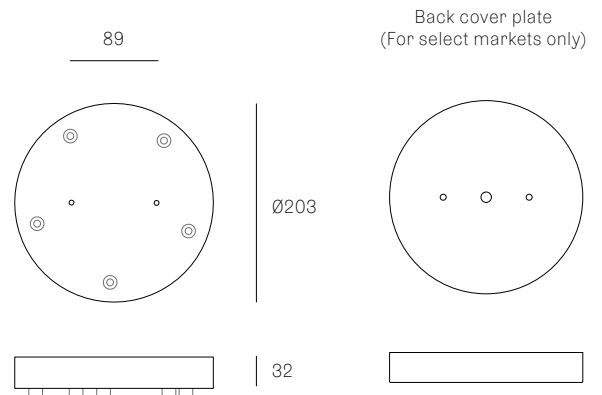

All dimensions are in millimeters (mm) unless otherwise specified.

XXX.7
SPECIFICATION


Pendants	Seven
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

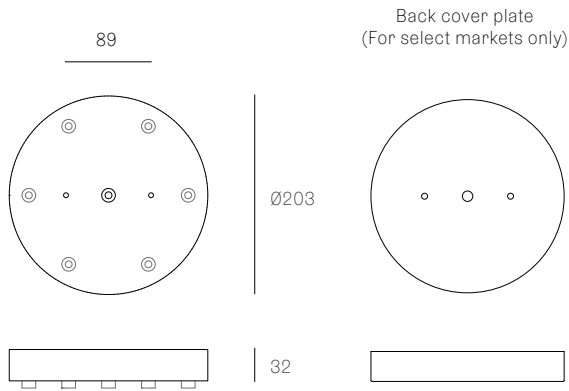

All dimensions are in millimeters (mm) unless otherwise specified.


38.8V / 73.8 RECTANGLE
SPECIFICATION

Pendants	Eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 138 x 16

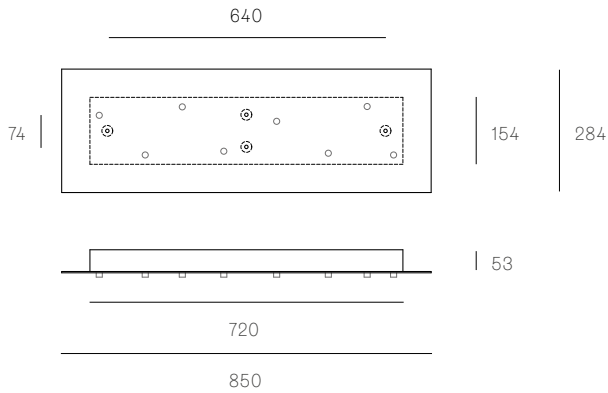


38.8V / 73.8 ROUND
SPECIFICATION

Pendants	Eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	∅362 x 16

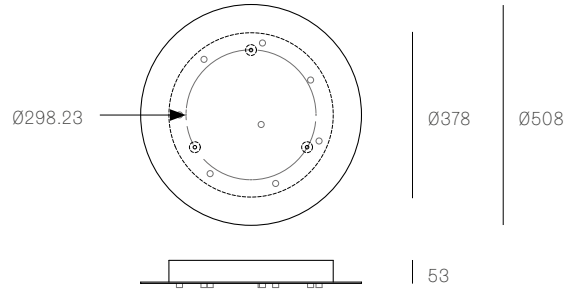


XXX.9 RECTANGLE
SPECIFICATION

Pendants	Nine
Material	White powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1108 x 132 x 16

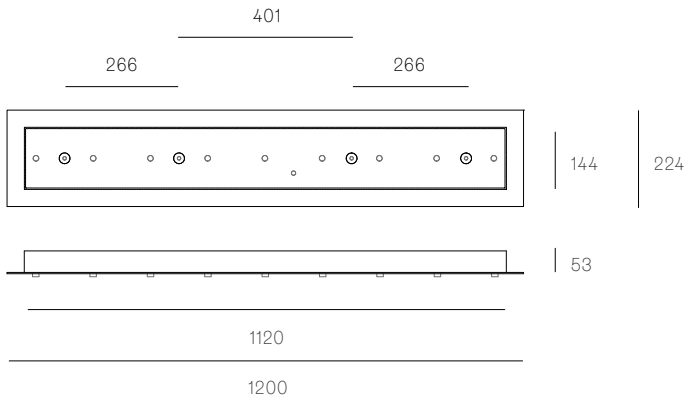

XXX.11 RECTANGLE
SPECIFICATION


Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 138 x 16

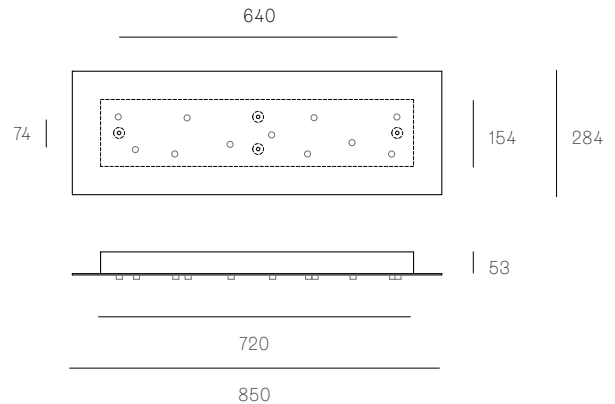

All dimensions are in millimeters (mm) unless otherwise specified.


38.11V / 73.11 RECTANGLE
SPECIFICATION

Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	854 x 224 x 16

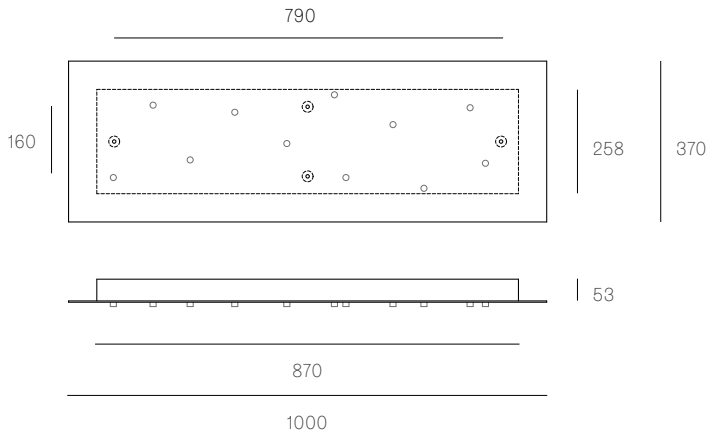


XXX.11 ROUND
SPECIFICATION

Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø362 x 16

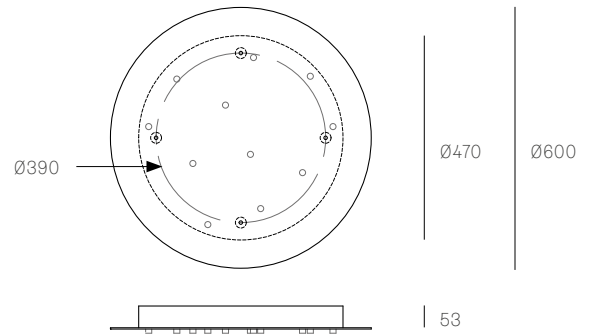


XXX.11 SQUARE
SPECIFICATION

Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	362 x 362 x 16

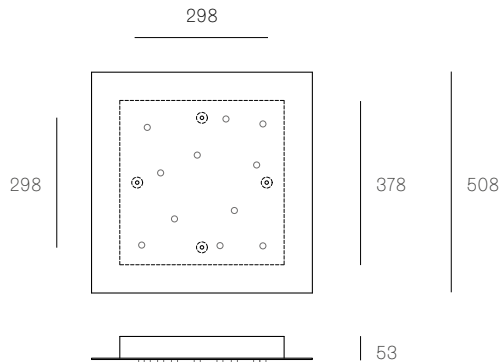

XXX.14 RECTANGLE
SPECIFICATION


Pendants	Fourteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 138 x 16

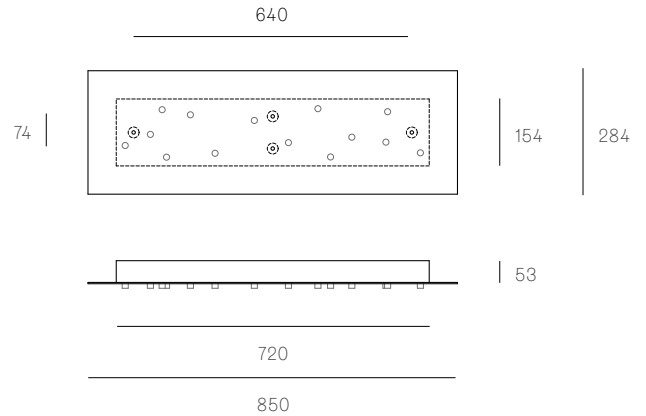

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.14 ROUND
SPECIFICATION

Pendants	Fourteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø362 x 16

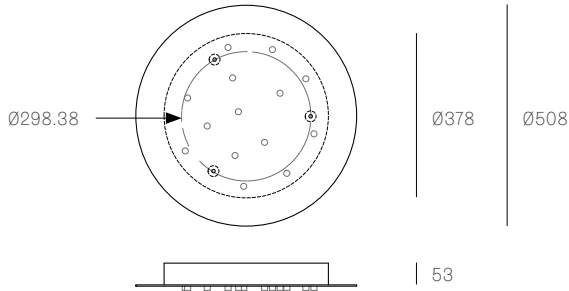


XXX.16 RECTANGLE
SPECIFICATION

Pendants	Sixteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	954 x 224 x 16

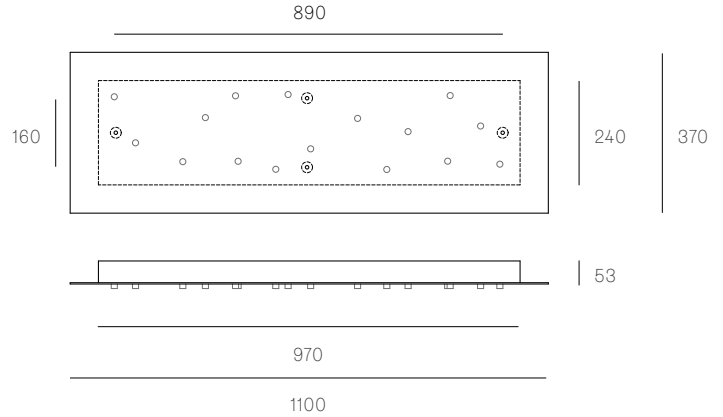


XXX.16 SQUARE
SPECIFICATION

Pendants	Sixteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	454 x 454 x 16

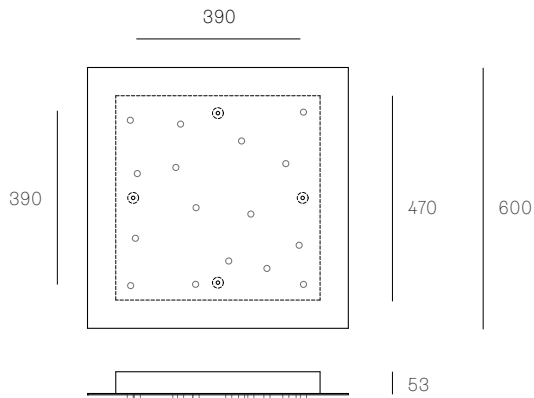

XXX.20 RECTANGLE
SPECIFICATION


Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1174 x 154 x 16

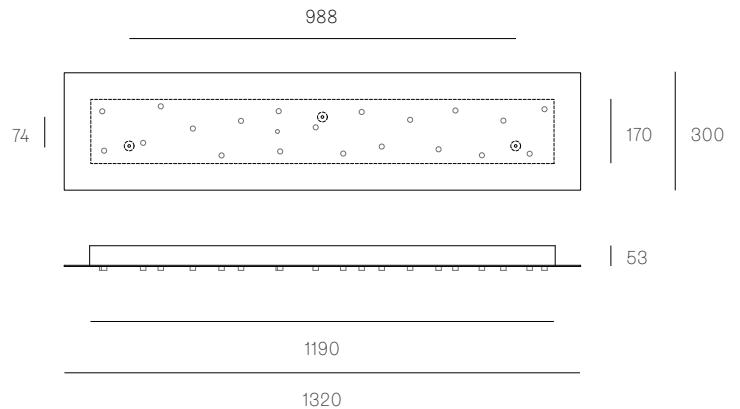

All dimensions are in millimeters (mm) unless otherwise specified.


73.20 RECTANGLE
SPECIFICATION

Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1174 x 299 x 16

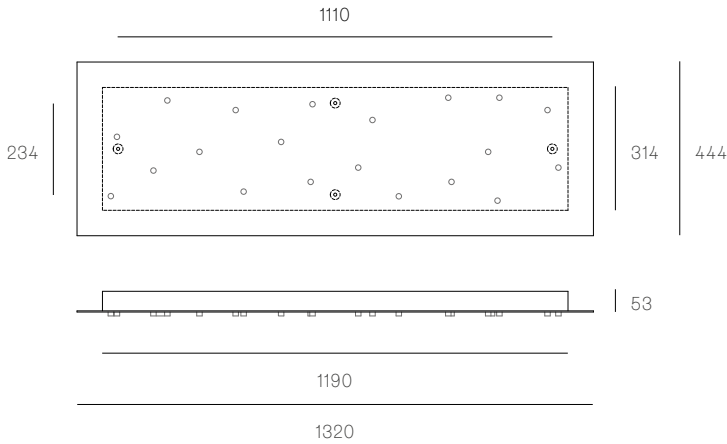


XX.20 ROUND
SPECIFICATION

Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø609 x 16

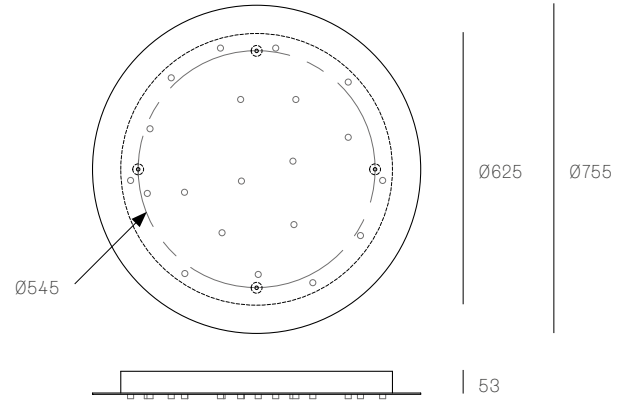


73.20 SQUARE
SPECIFICATION

Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

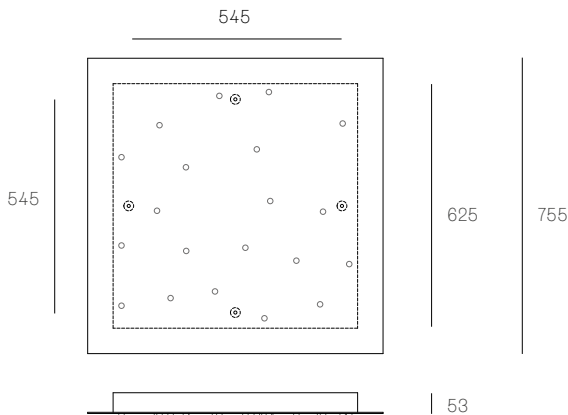

XXX.21 RECTANGLE
SPECIFICATION


Pendants	Twenty-one
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 135 x 16

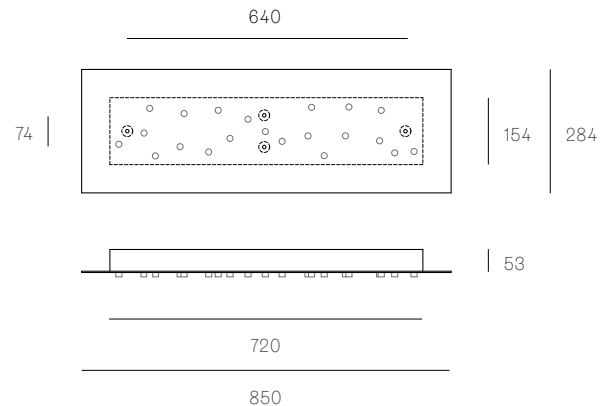

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.26 RECTANGLE
SPECIFICATION

Pendants	Twenty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	854 x 189 x 16

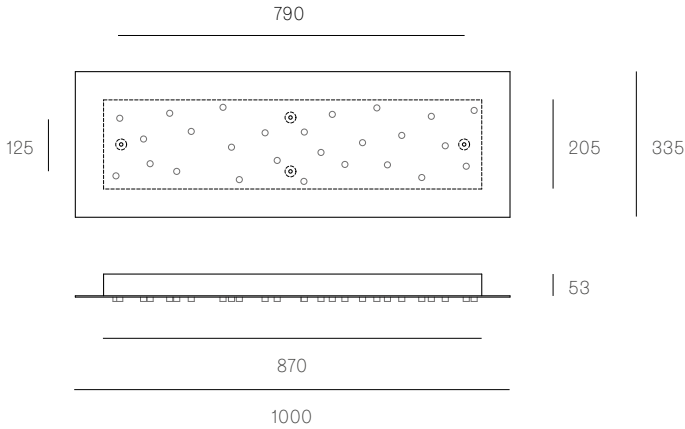


XXX.26 ROUND
SPECIFICATION

Pendants	Twenty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø454 x 16

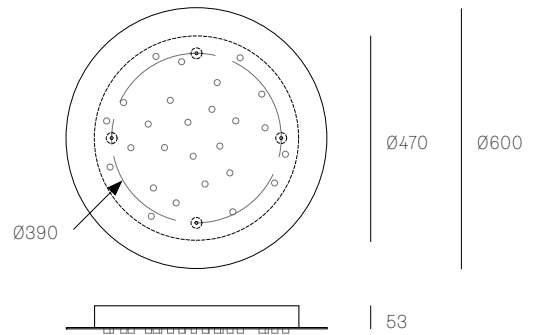


XXX.26 SQUARE
SPECIFICATION

Pendants	Twenty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	454 x 454 x 16

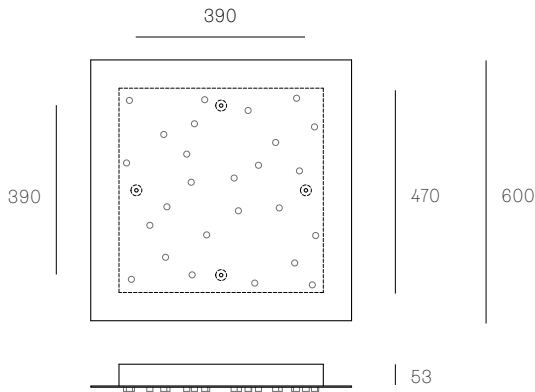

XXX.28 RECTANGLE
SPECIFICATION


Pendants	Twenty-eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1174 x 298 x 16

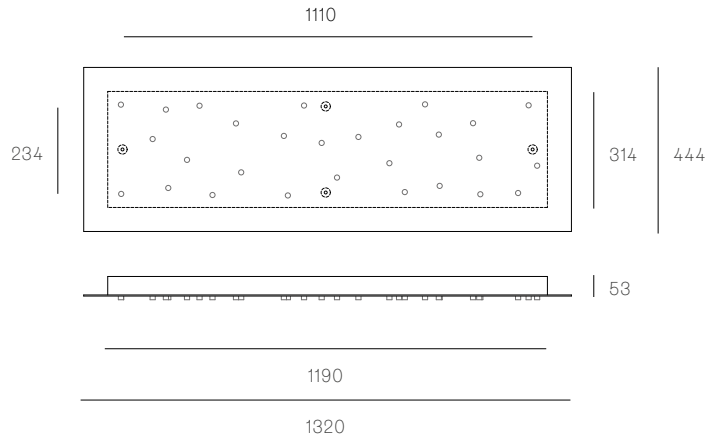

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.28 SQUARE
SPECIFICATION

Pendants	Twenty-eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

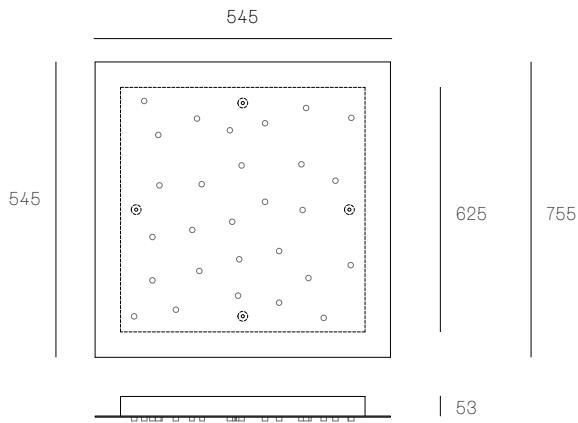


XXX.36 RECTANGLE
SPECIFICATION

Pendants	Thirty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	954 x 224 x 16

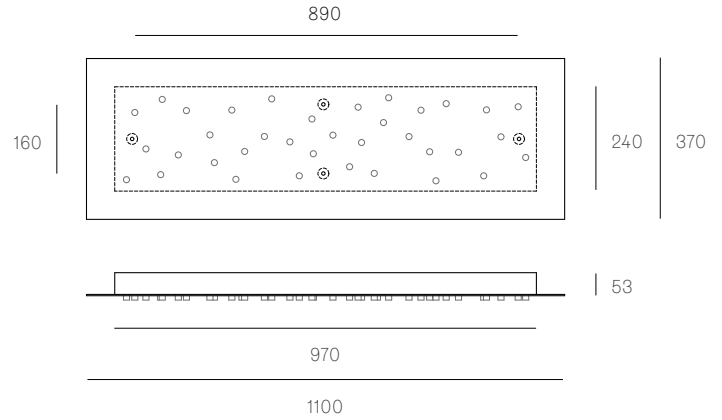


XXX.36 ROUND
SPECIFICATION

Pendants	Thirty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø609 x 16

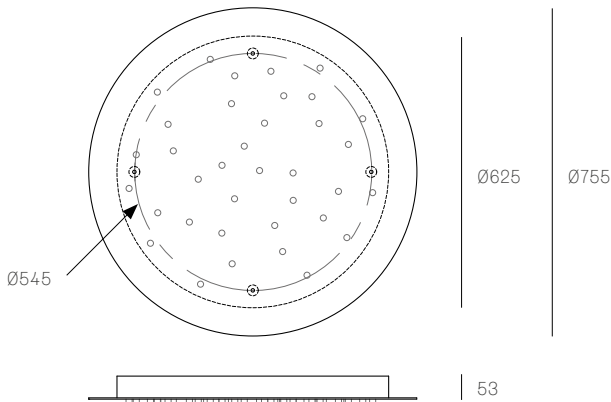

XXX.36 SQUARE
SPECIFICATION


Pendants	Thirty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

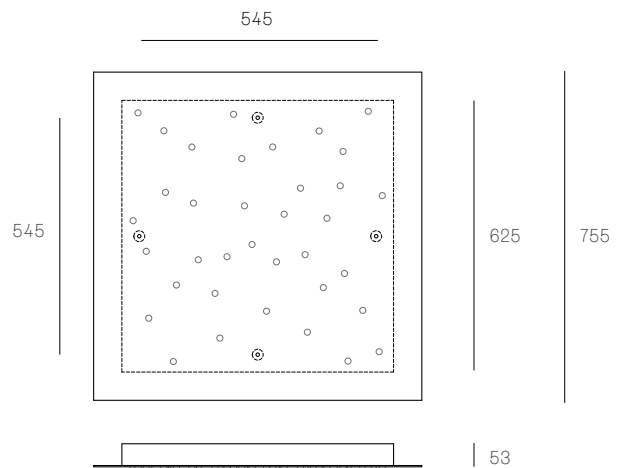

All dimensions are in millimeters (mm) unless otherwise specified.

XXX.50 SQUARE
SPECIFICATION


Pendants	Fifty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

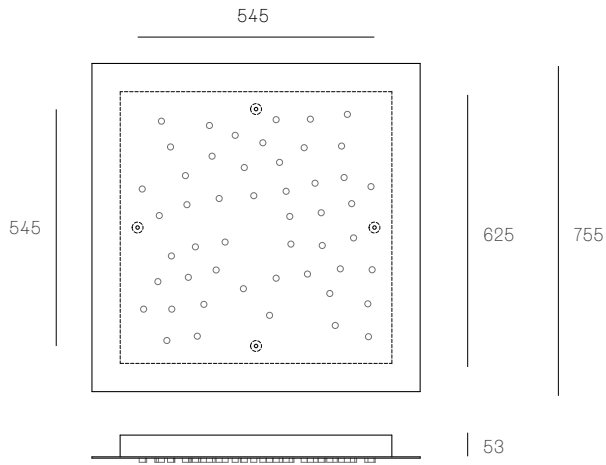

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.3 CLUSTER
SPECIFICATION

Pendants	Three
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

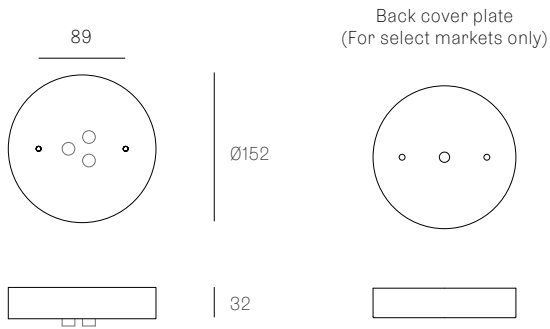

XXX.7 CLUSTER
SPECIFICATION


Pendants	Seven
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

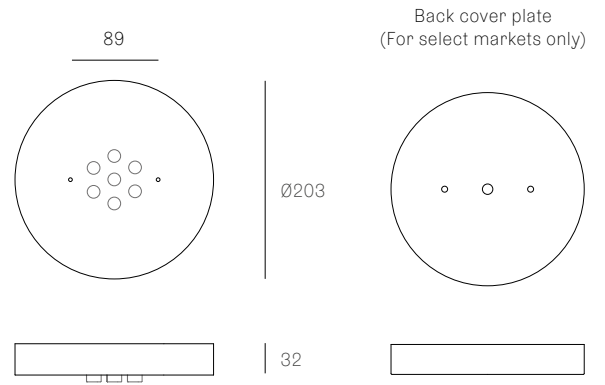

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.13 CLUSTER
SPECIFICATION

Pendants	Thirteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø250 x 16

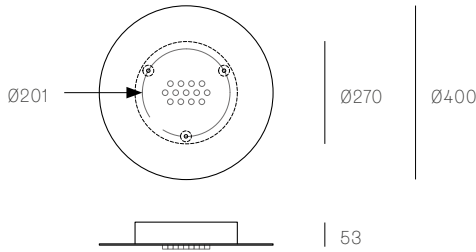


XXX.19 CLUSTER
SPECIFICATION

Pendants	Nineteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø355 x 16

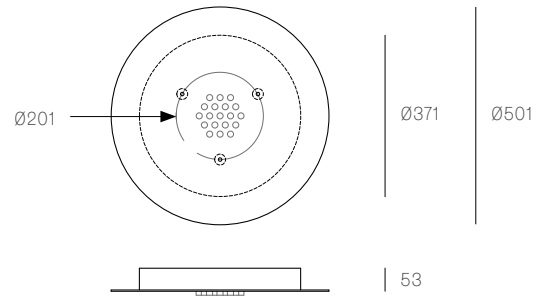


XXX.37 CLUSTER
SPECIFICATION

Pendants	Thirty-seven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø454 x 16

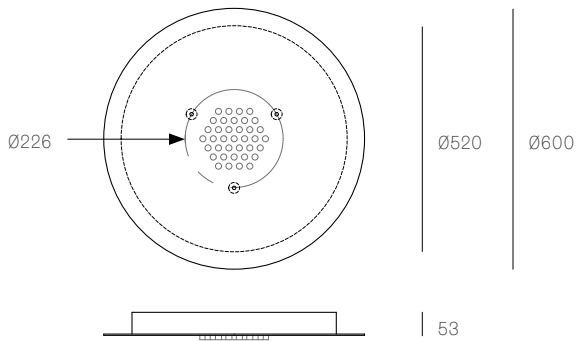

XXX.61 CLUSTER
SPECIFICATION


Pendants	Sixty-one
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø561 x 16

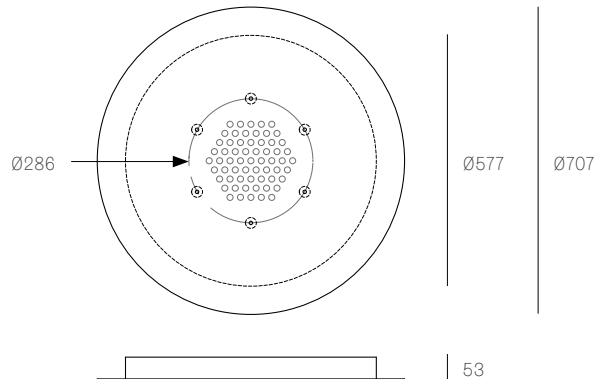

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.3 - XXX.9 CEILING MOUNTED SPECIFICATION

Materials Brass or black stainless steel cover
Power Supply Integral

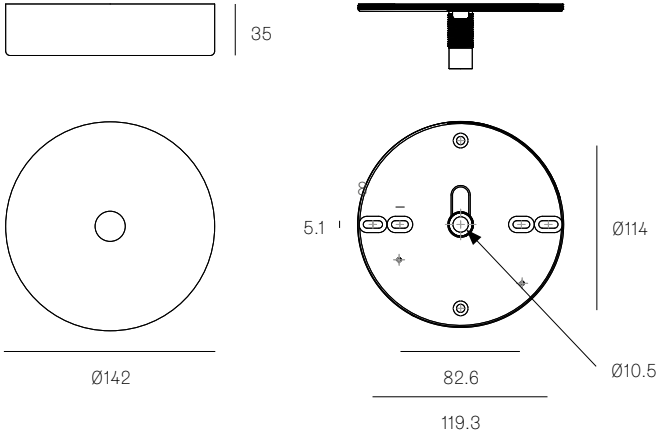


XXX.12 CEILING MOUNTED SPECIFICATION

Materials Brass, black, or white powder coated stainless steel cover
Power Supply Remote

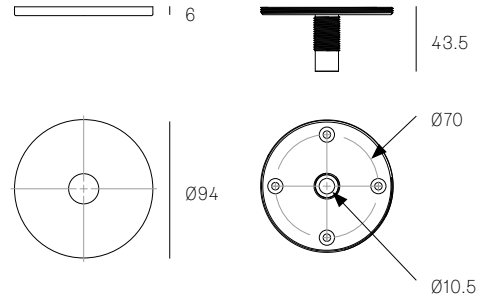


XXX.3 - XXX.6 CABLE SUSPENDED SPECIFICATION

Materials Black or white powder coated stainless steel cover
Coaxial Cable Adjustable. 3000mm, 6000mm, or 15000mm
Power Supply Integral

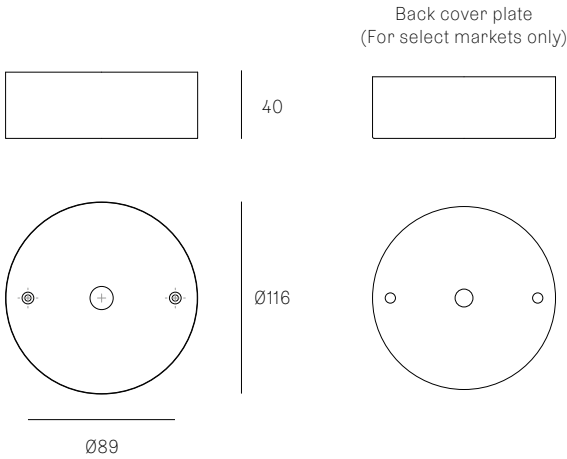

XXX.3 - XXX.6 FLOOR SPECIFICATION


Materials Brass or black powder coated base
Cable Black flexible cord, 2290mm
Plug Type Type A - 110V
 Type C - 230V
 Type G - 230V
 Type I - 230V

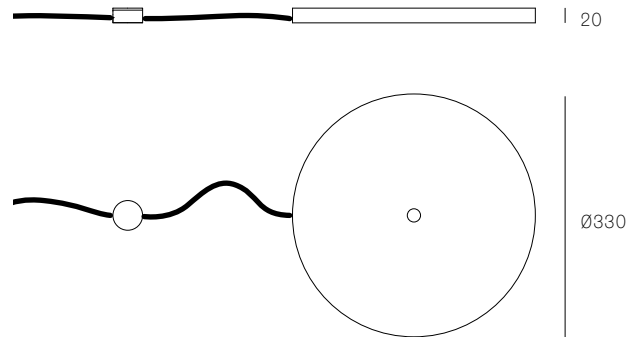

All dimensions are in millimeters (mm) unless otherwise specified.


XXXS
SPECIFICATION

Pendant One
Material White powder coated stainless steel cover
Power Supply Remote

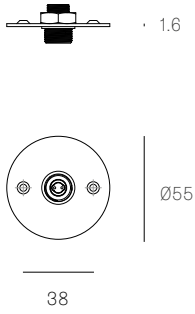


XXXSP
SPECIFICATION

Pendant One
Material White powder coated stainless steel cover
Power Supply Integral
 Remote for select markets only

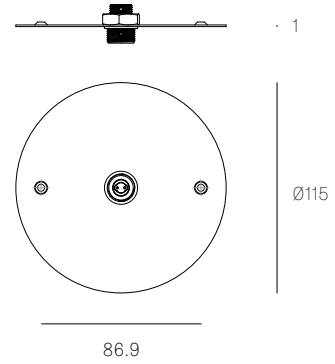


76S
SPECIFICATION

Pendant One
Material White powder coated stainless steel cover
Power Supply Remote

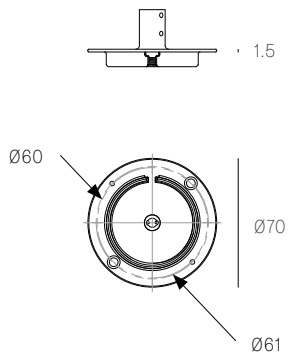

76SP
SPECIFICATION


Pendant One
Material White powder coated stainless steel cover
Power Supply Integral
 Remote for select markets only

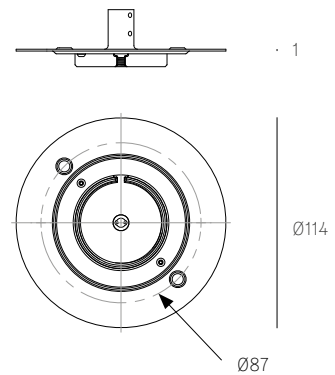

All dimensions are in millimeters (mm) unless otherwise specified.

XXXS BRASS
SPECIFICATION


Pendant	One
Material	Brass base
Power Supply	Remote



All dimensions are in millimeters (mm)
unless otherwise specified.


XXXT
SPECIFICATION

- Pendant** One
- Material** Brass base and dial control
- Cable** Black flexible cord, 2290mm
- Plug Type** Type A - 110V
Type C - 230V
Type G - 230V
Type I - 230V

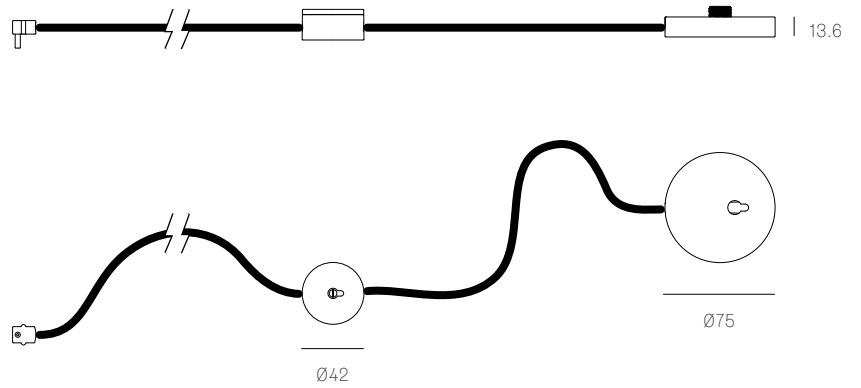

44T
SPECIFICATION

- Pendant** One
- Material** Black base and dial control
- Cable** Black flexible cord, 2290mm
- Plug Type** Type A - 110V
Type C - 230V
Type G - 230V
Type I - 230V

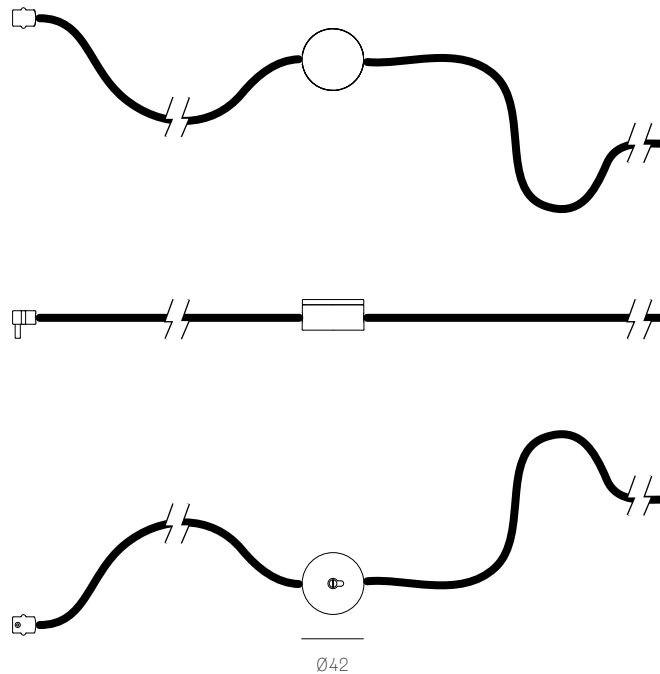

All dimensions are in millimeters (mm) unless otherwise specified.