



XXX.1
SPECIFICATION

Pendant	One
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral Remote for select markets only

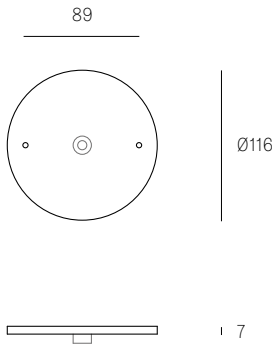


XXX.1 DEEP
SPECIFICATION

Pendant	One
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

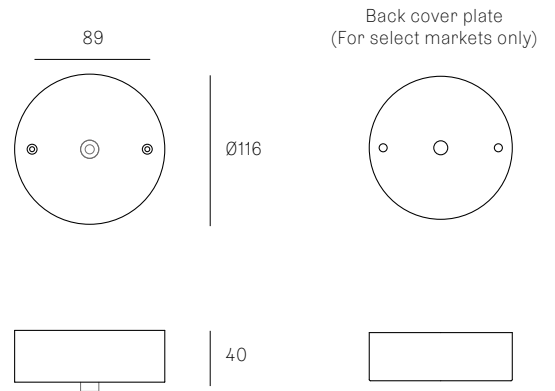


XXX.1M
SPECIFICATION

Pendant	One
Materials	Brushed nickel or white powder coated zinc cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote



XXX.1MI
SPECIFICATION


Pendant	One
Material	White polyurethane
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote



All dimensions are in millimeters (mm) unless otherwise specified.


XXX.1M0
SPECIFICATION

Pendant	One
Material	White polyurethane
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote




XXX.3
SPECIFICATION

Pendants	Three
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

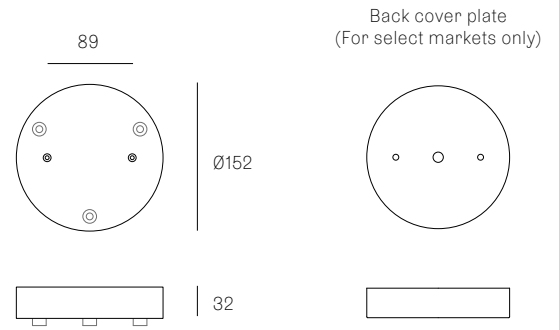


73.3
SPECIFICATION

Pendants	Three
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

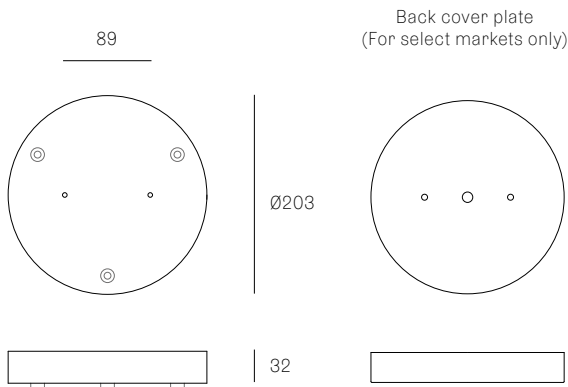

XXX.5
SPECIFICATION


Pendants	Five
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

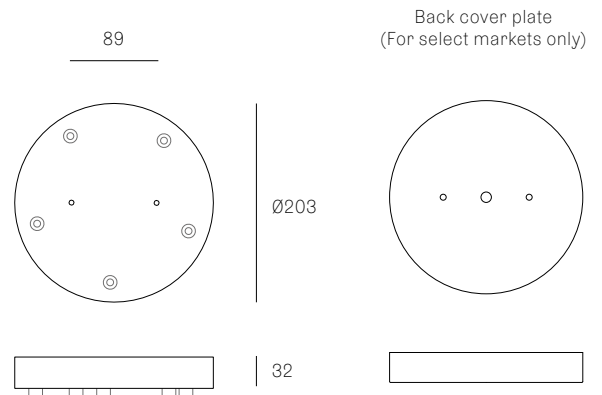

All dimensions are in millimeters (mm)
unless otherwise specified.

XXX.7
SPECIFICATION


Pendants	Seven
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

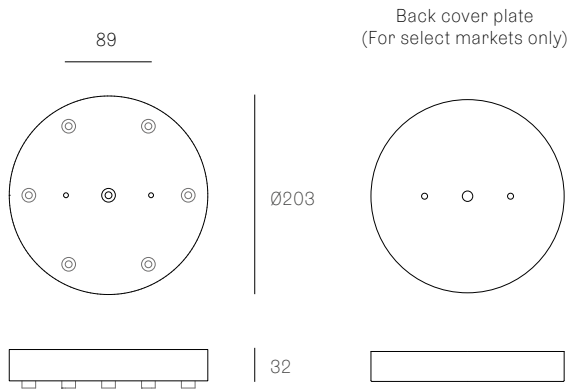

All dimensions are in millimeters (mm) unless otherwise specified.


38.8V / 73.8 RECTANGLE
SPECIFICATION

Pendants	Eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 138 x 16

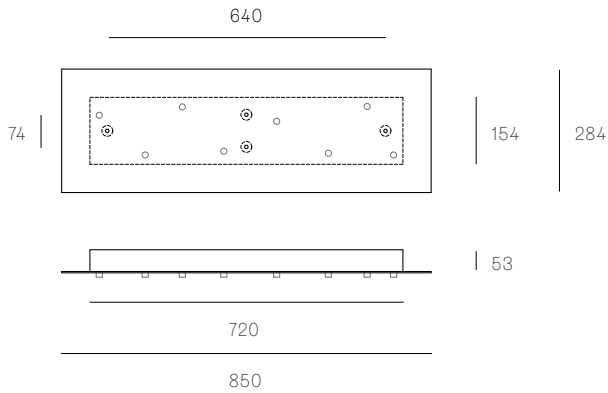


38.8V / 73.8 ROUND
SPECIFICATION

Pendants	Eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	∅362 x 16

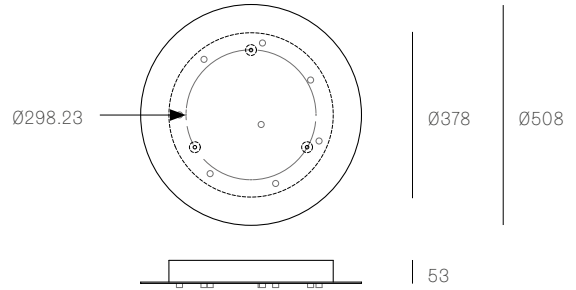


XXX.9 RECTANGLE
SPECIFICATION

Pendants	Nine
Material	White powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1108 x 132 x 16

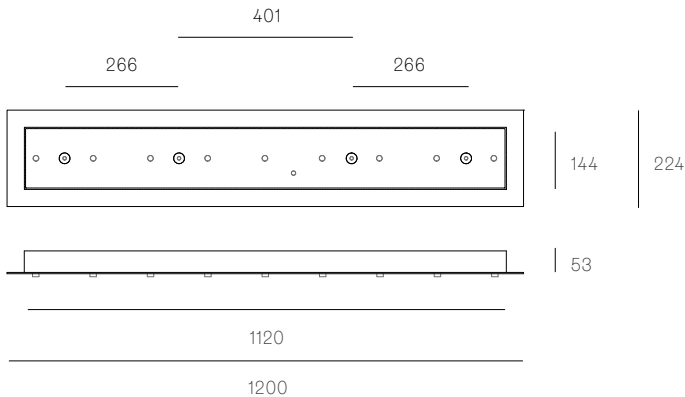

XXX.11 RECTANGLE
SPECIFICATION


Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 138 x 16

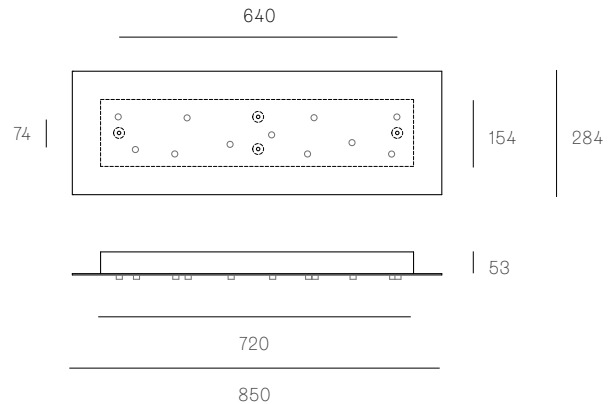

All dimensions are in millimeters (mm) unless otherwise specified.


38.11V / 73.11 RECTANGLE
SPECIFICATION

Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	854 x 224 x 16

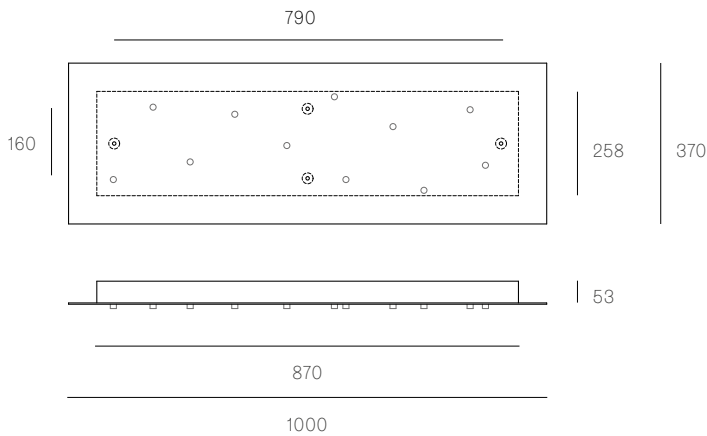


XXX.11 ROUND
SPECIFICATION

Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø362 x 16

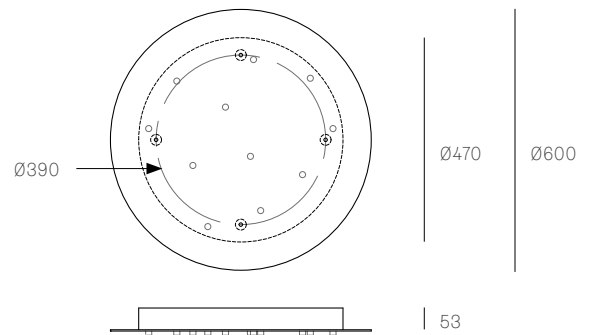


XXX.11 SQUARE
SPECIFICATION

Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	362 x 362 x 16

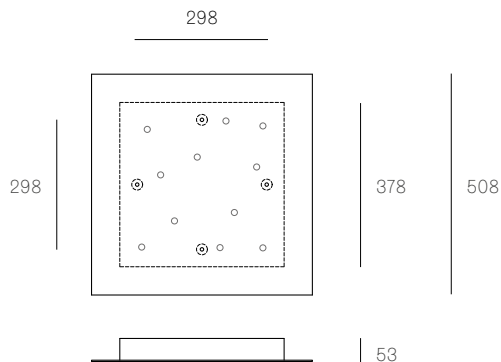

XXX.14 RECTANGLE
SPECIFICATION


Pendants	Fourteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 138 x 16

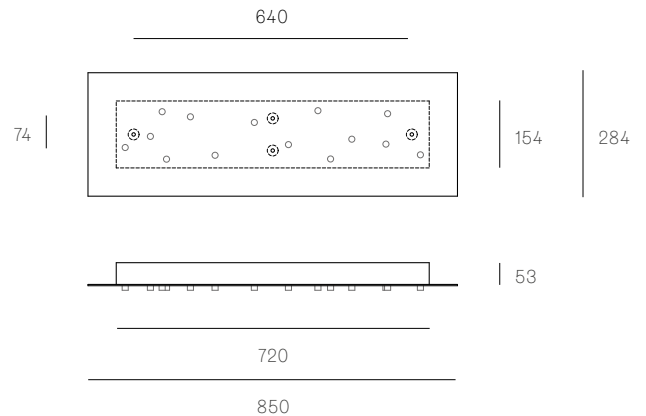

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.14 ROUND
SPECIFICATION

Pendants	Fourteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø362 x 16

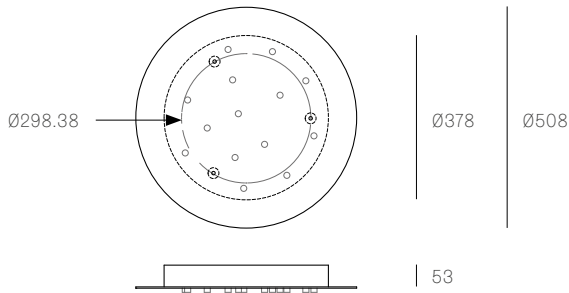


XXX.16 RECTANGLE
SPECIFICATION

Pendants	Sixteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	954 x 224 x 16

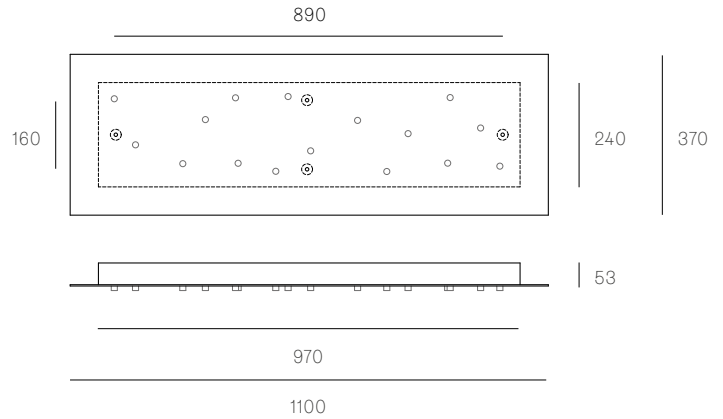


XXX.16 SQUARE
SPECIFICATION

Pendants	Sixteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	454 x 454 x 16

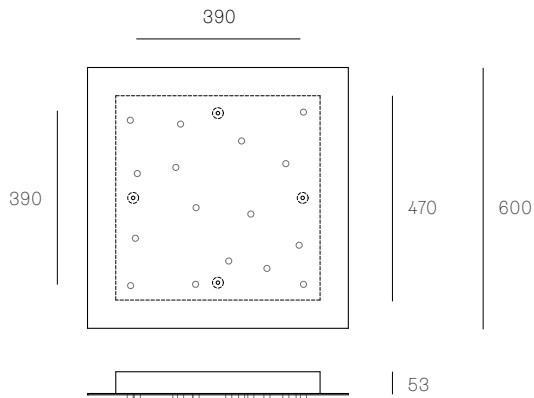

XXX.20 RECTANGLE
SPECIFICATION


Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1174 x 154 x 16

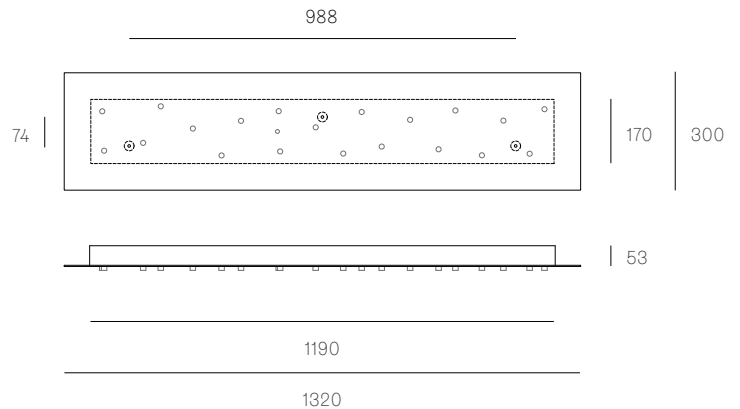

All dimensions are in millimeters (mm) unless otherwise specified.


73.20 RECTANGLE
SPECIFICATION

Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1174 x 299 x 16

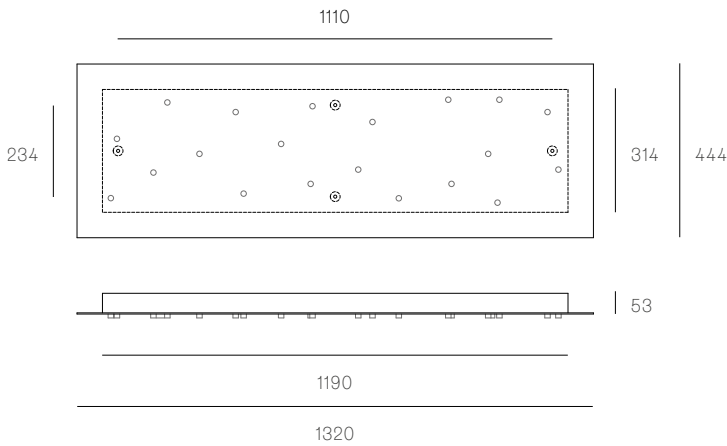


XX.20 ROUND
SPECIFICATION

Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø609 x 16

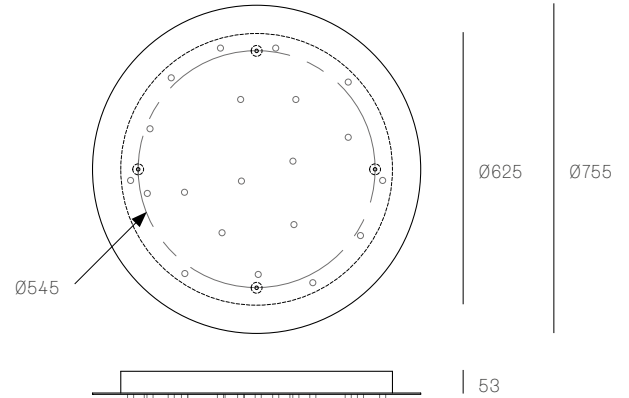


73.20 SQUARE
SPECIFICATION

Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

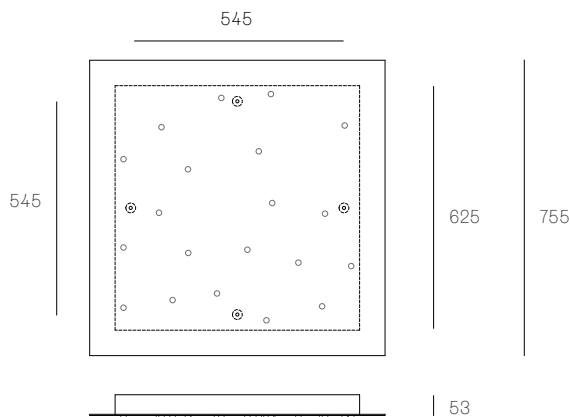

XXX.21 RECTANGLE
SPECIFICATION


Pendants	Twenty-one
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 135 x 16

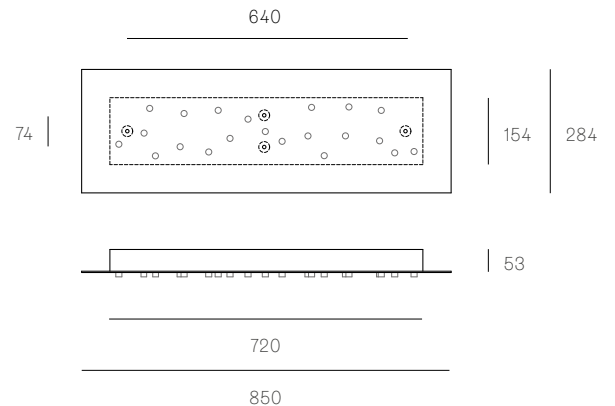

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.26 RECTANGLE
SPECIFICATION

Pendants	Twenty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	854 x 189 x 16

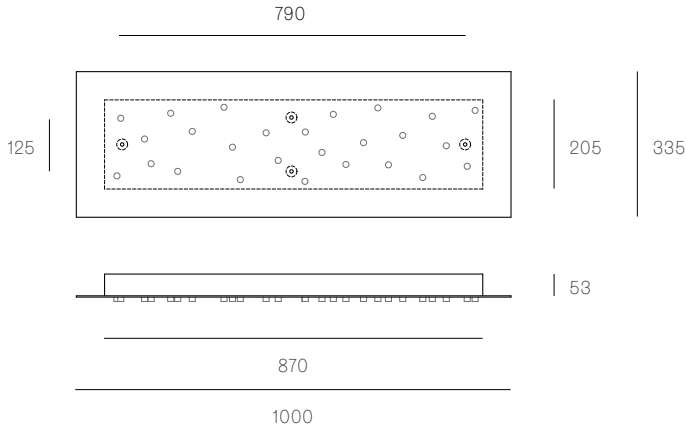


XXX.26 ROUND
SPECIFICATION

Pendants	Twenty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø454 x 16

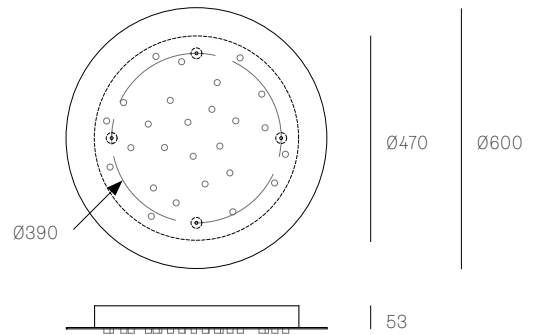


XXX.26 SQUARE
SPECIFICATION

Pendants	Twenty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	454 x 454 x 16

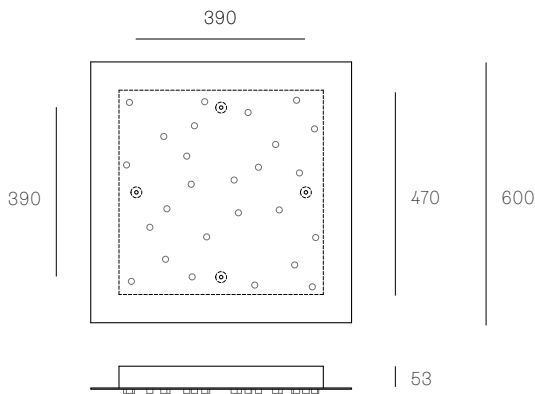

XXX.28 RECTANGLE
SPECIFICATION


Pendants	Twenty-eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1174 x 298 x 16

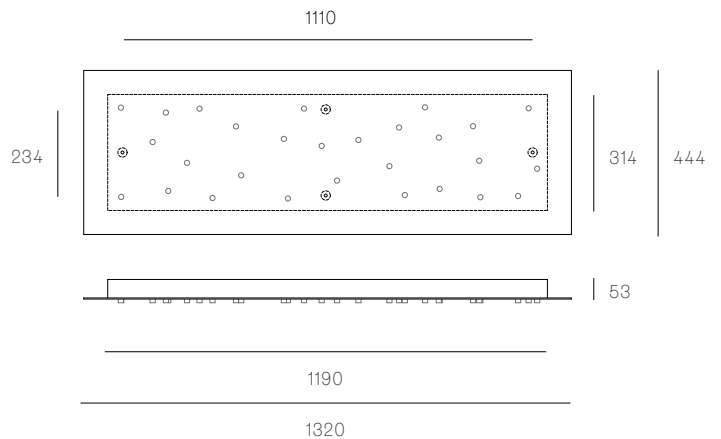

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.28 SQUARE
SPECIFICATION

Pendants	Twenty-eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

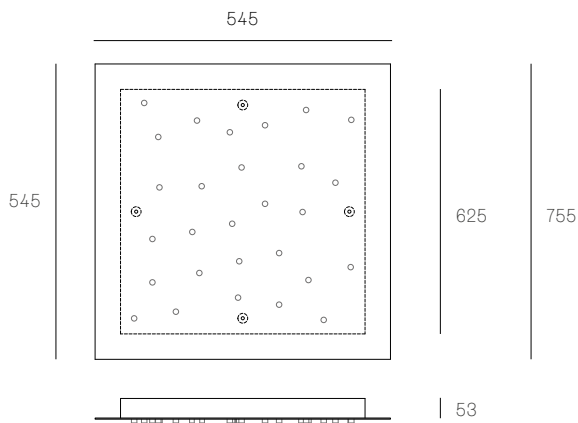


XXX.36 RECTANGLE
SPECIFICATION

Pendants	Thirty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	954 x 224 x 16

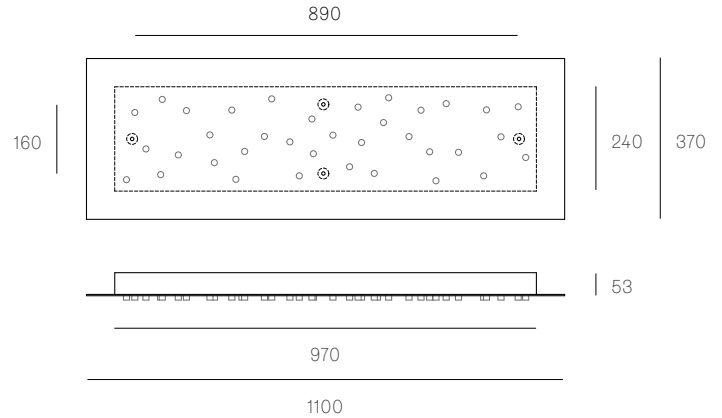


XXX.36 ROUND
SPECIFICATION

Pendants	Thirty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø609 x 16

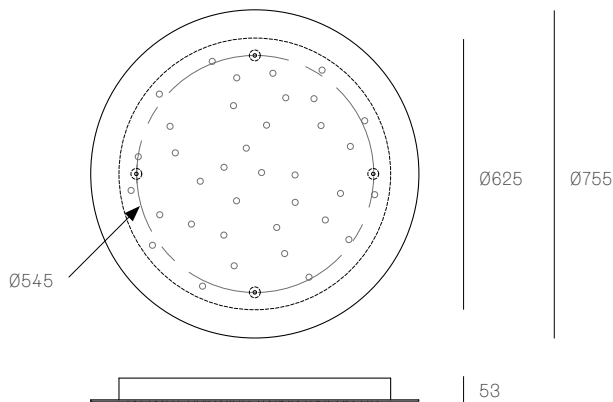

XXX.36 SQUARE
SPECIFICATION


Pendants	Thirty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

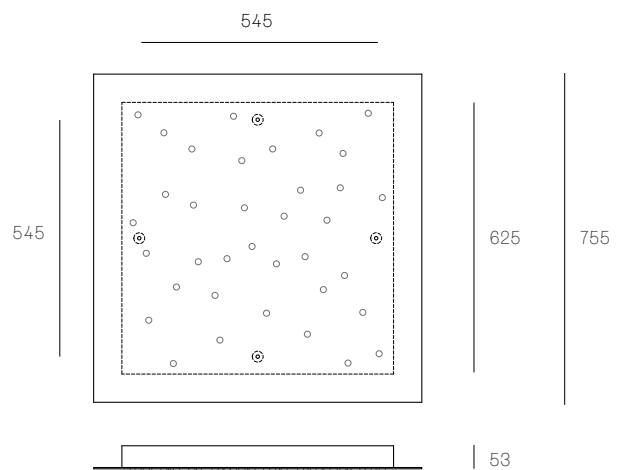

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.50 SQUARE
SPECIFICATION

Pendants	Fifty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

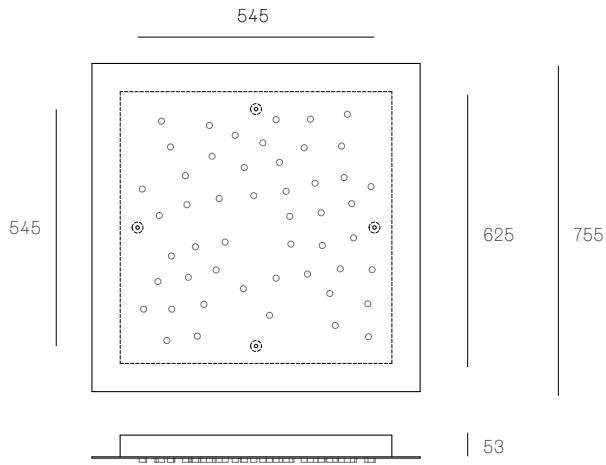


All dimensions are in millimeters (mm)
unless otherwise specified.

ADJUSTABLE LENGTH

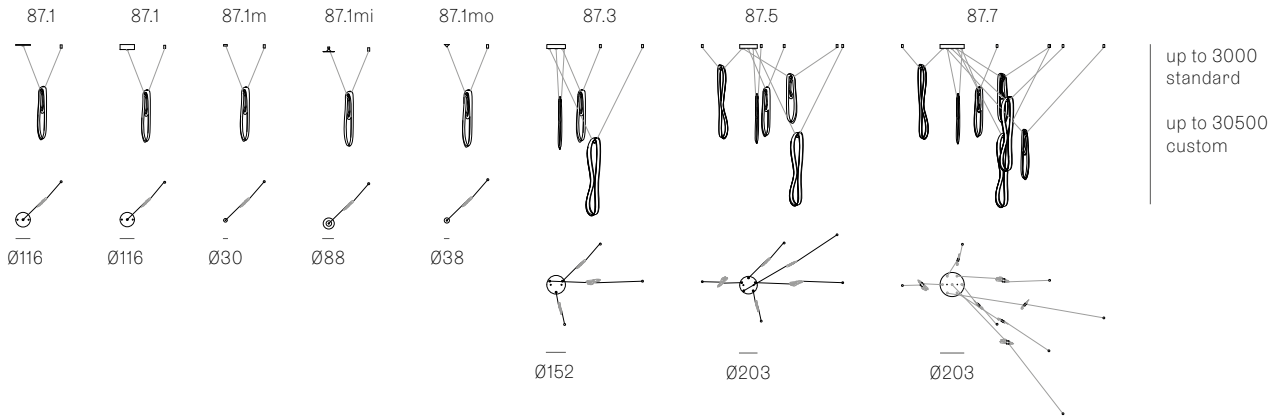

NON-ADJUSTABLE LENGTH



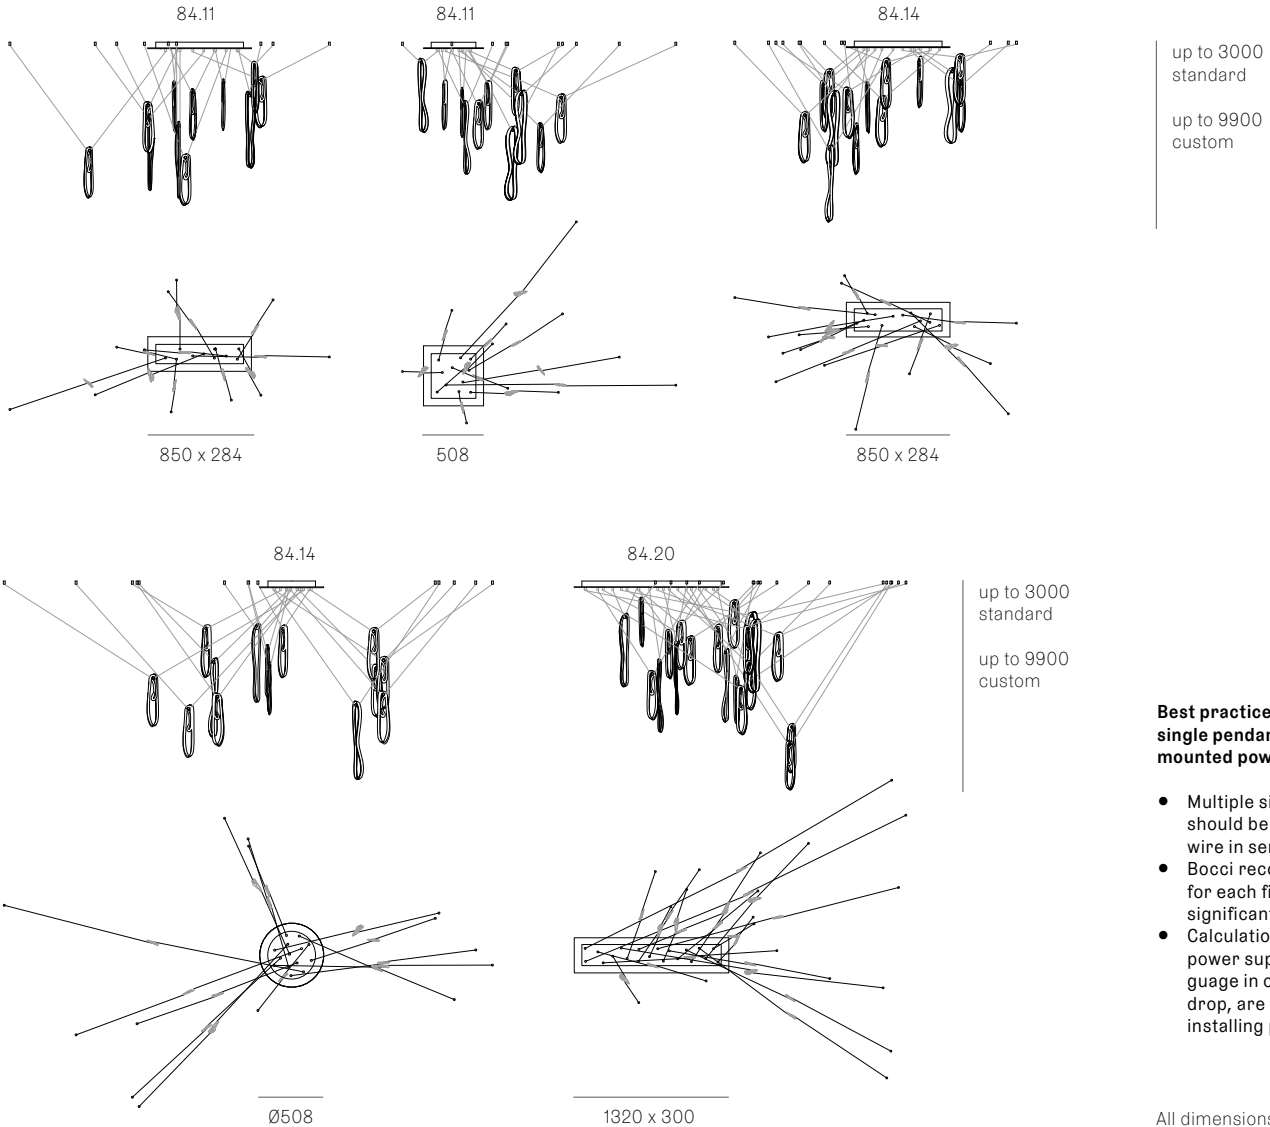


Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.







All dimensions are in millimeters (mm) unless otherwise specified.

NON-ADJUSTABLE LENGTH

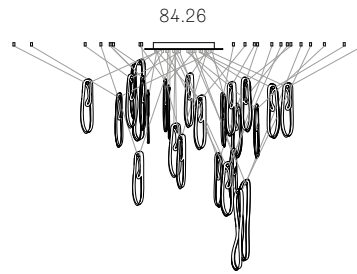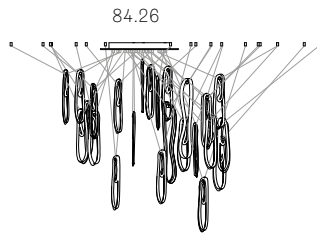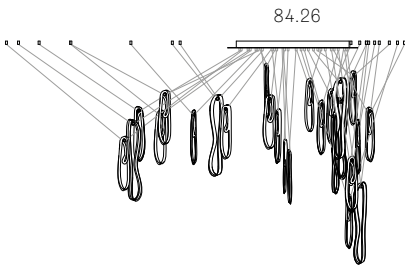




up to 3000
standard

up to 30500
custom

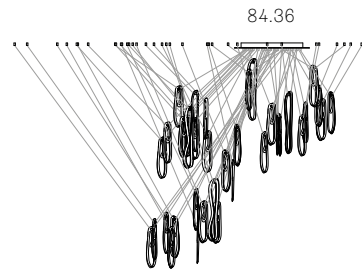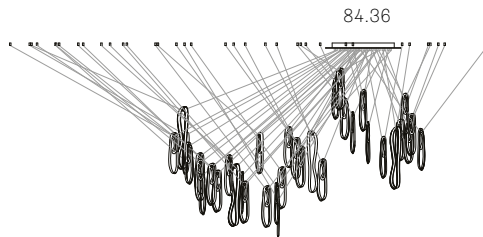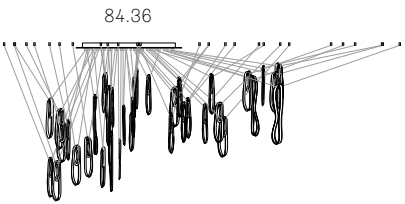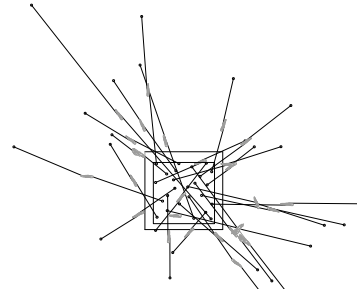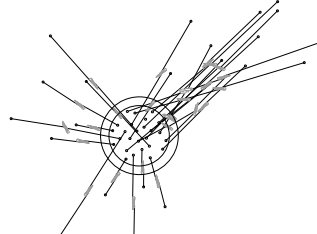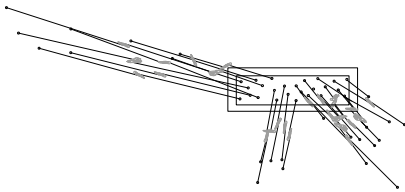

up to 3000
standard

up to 9900
custom

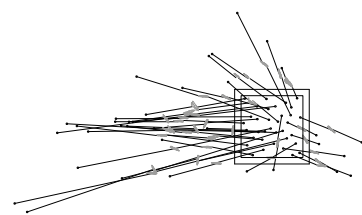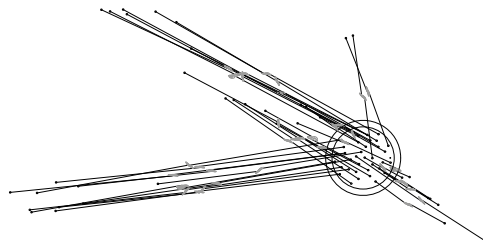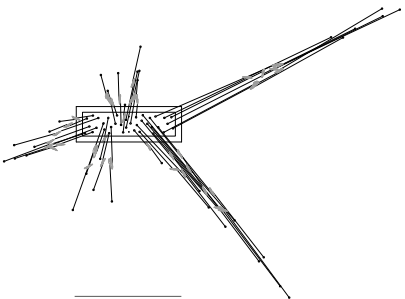

All dimensions are in millimeters (mm) unless otherwise specified.

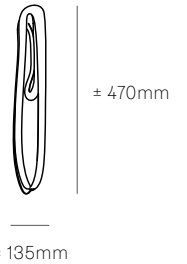
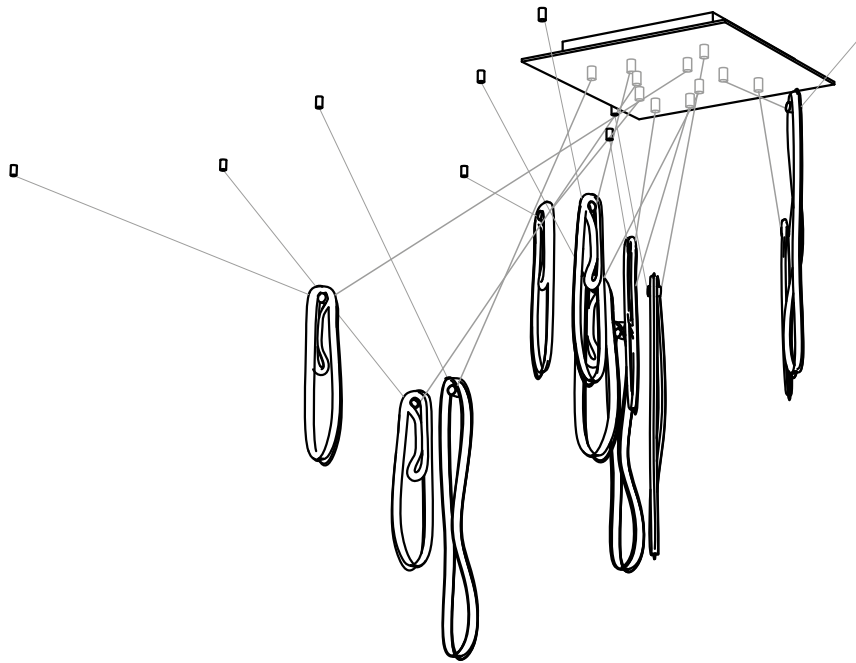


Image shown above 87.11 with square canopy with pendant anchor kit

Series 87

Mounting Ceiling mounted

Glass Colour Clear

Lamp 1.5W LED, 2500K, 130lm
10W Xenon, 2600K, 81lm

Coaxial Length 3000mm standard / up to 30500mm maximum
Adjustable length: 87.1 - 87.7
Non-adjustable Length: 87.11 - 87.36

Canopy Finishes 87.1 - 87.7: white, black or brushed nickel canopy
87.1mi/mo: white polyurethane canopy
87.11 - 87.36: white canopy

Materials Blown glass, copper mesh, braided metal coaxial cable, electrical components, steel canopy

Power Supply Integral
Remote mounted for 87.1m/mo/mi

Bocci recommends remote mounting power supplies for ease of long-term maintenance.

Environment Indoor, dry location. IP30

Note Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible.

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.

Patent # US Patent pending
EU 03611144 - 0005-0009


Weight (kg)

Round		Square	
87.1	1.4	87.11	25.5
87.3	4.1	87.26	50.5
87.5	6.8	87.36	68.6
87.7	9.5		
87.14	30.5		
87.26	48.2		
87.36	64.1		

Rectangle	
87.11	25.5
87.14	30.9
87.20	40.9
87.26	45.9
87.36	64.5




ADJUSTABLE LENGTH

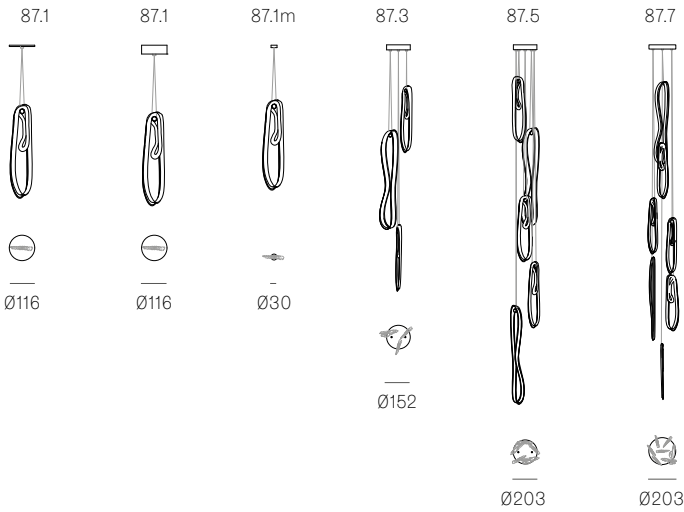

up to 3000
standard
up to 30500
custom

NON-ADJUSTABLE LENGTH

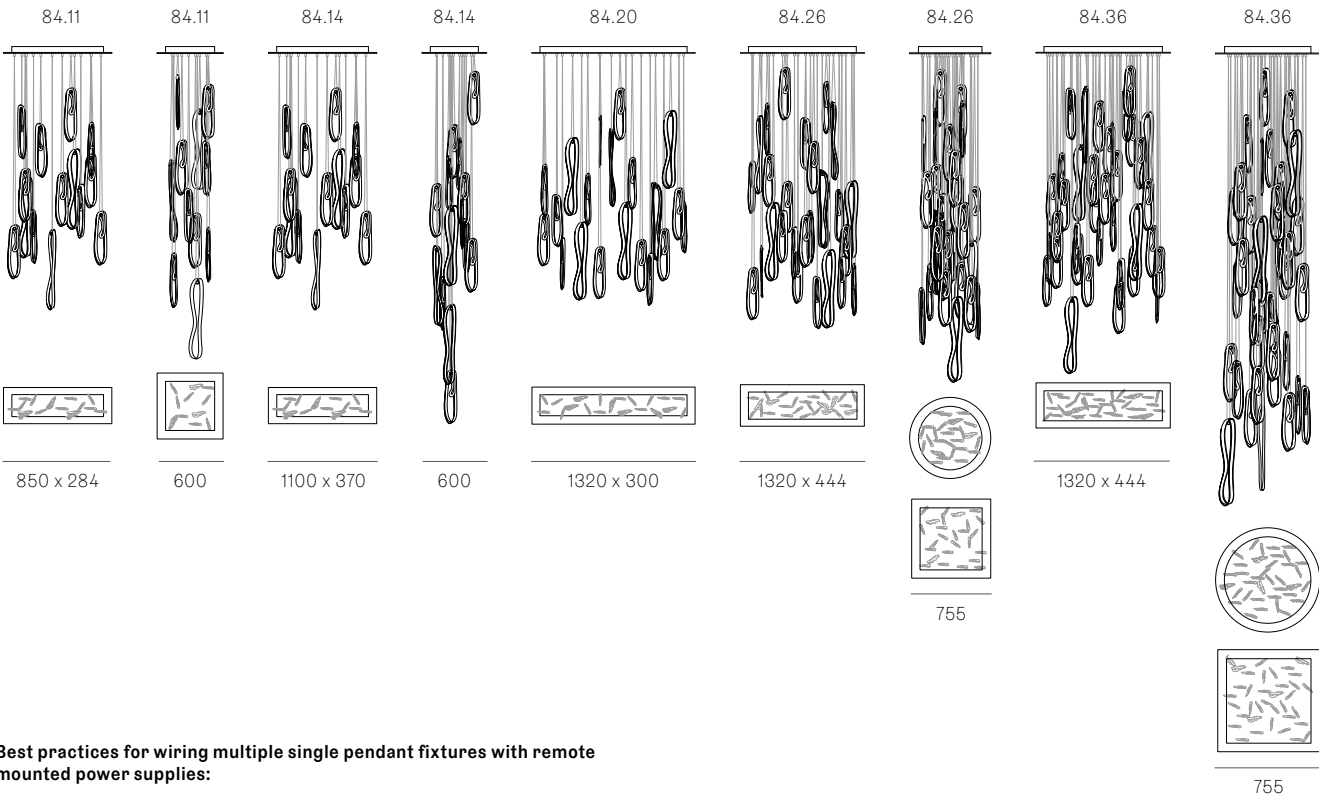

up to 3000
standard
up to 30500
custom

Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.