


ORP SMALL



Oblique Rhombic Prism is a pared-back structure that allows sacred geometry and light to come together as one.

ORP emphasises simplicity and form, connecting elements that speak to the links between all formations of life.

ORP SMALL

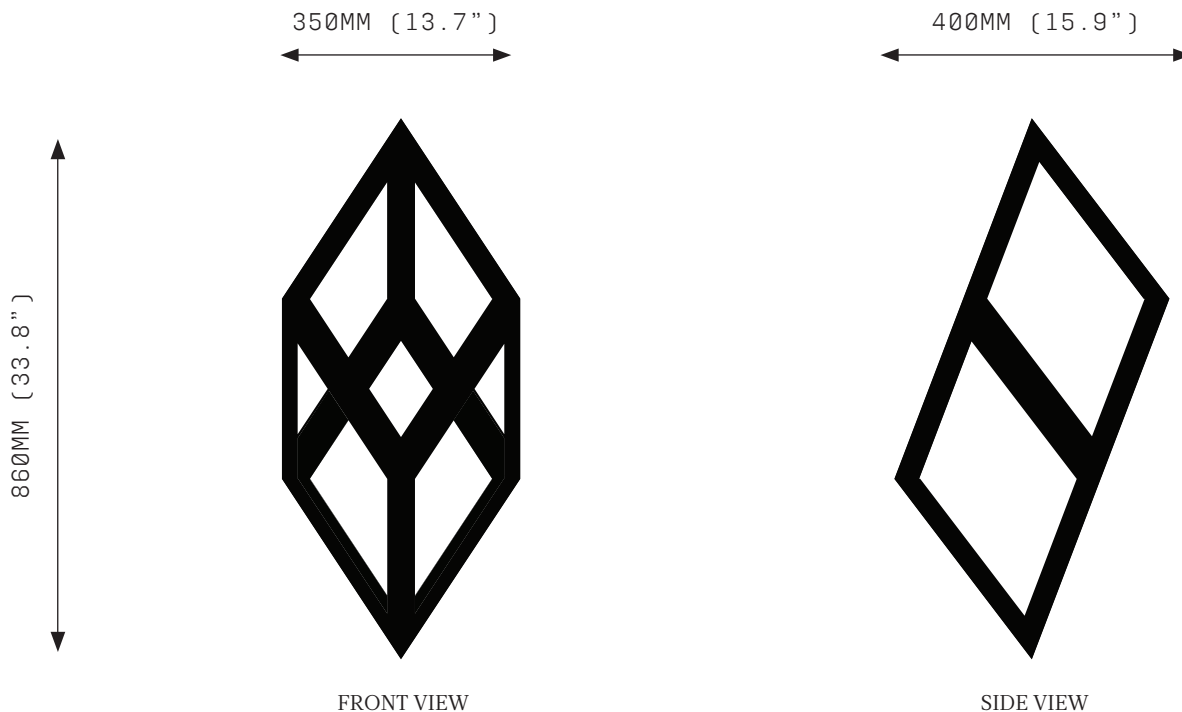

SPECIFICATIONS

Ordering Code:
 ORP.S.PC
 ORP.S.SS
 ORP.S.B

Lamp:
 24V LED WW 2700K

Lumens:
 4872 LM

Voltage:
 24V DC

Watts:
 40W

Weight:
 Approx. 5-7kg*
 *Exclusive of canopy

Inclusions:
 Power Supply Unit x 60W

Exclusions:
 User Interface, Dimmer Unit

PRODUCT OPTIONS

Finishes:
 PCB Powdercoat Matte Black
 PCW Powdercoat Matte White
 AB Aged Brass
 BB Brushed Brass
 HRB Hand Rubbed Brass
 DB Dark Bronze
 MP Mottled Patina
 PB Polished Brass
 BSS Brushed Stainless Steel
 PSS Polished Stainless Steel

Suspension:
 V-CAB Vertical Cable

Canopy:*
 RFS Round Flush Small
 RFM Round Flush Medium
 RFL Round Flush Large
 RSM Round Surface Medium
 RSL Round Surface Large

*Refer to Canopy Specification Guide


WARRANTY

3 Years Fixture
 3 Years Power Supply Unit
 3 Years LED

Orp is a solid fixture that will require very little maintenance over the years.

If your Orp is treated with care, it will shine brightly for many years to come.

Contact us for custom variations.



Installation should only be undertaken by a qualified professional


ORP MEDIUM



Oblique Rhombic Prism is a pared-back structure that allows sacred geometry and light to come together as one.

ORP emphasises simplicity and form, connecting elements that speak to the links between all formations of life.

ORP MEDIUM

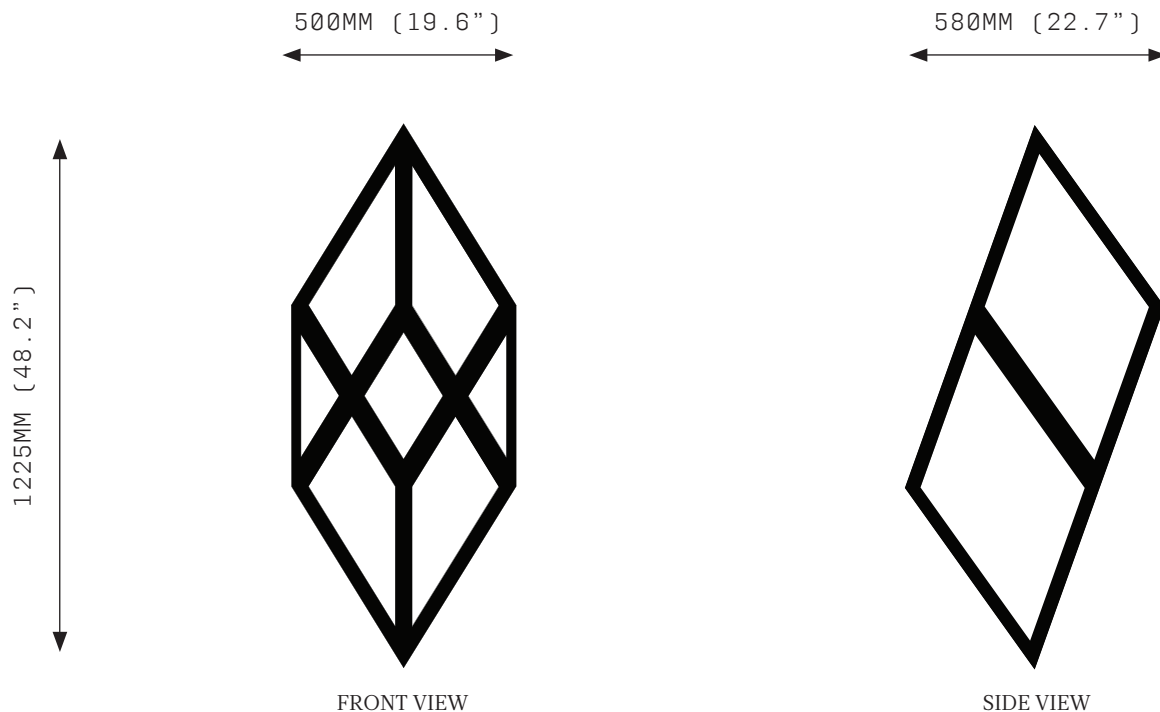

SPECIFICATIONS

Ordering Code:
 ORP.M.PC
 ORP.M.SS
 ORP.M.B

Lamp:
 24V LED WW 2700K

Lumens:
 6960 LM

Voltage:
 24V DC

Watts:
 58W

Weight:
 Approx. 7-10kg*
 *Exclusive of canopy

Inclusions:
 Power Supply Unit x 100W

Exclusions:
 User Interface, Dimmer Unit

PRODUCT OPTIONS

Finishes:
 PCB Powdercoat Matte Black
 PCW Powdercoat Matte White
 AB Aged Brass
 BB Brushed Brass
 HRB Hand Rubbed Brass
 DB Dark Bronze
 MP Mottled Patina
 PB Polished Brass
 BSS Brushed Stainless Steel
 PSS Polished Stainless Steel

Suspension:
 V-CAB Vertical Cable

Canopy: *
 RFS Round Flush Small
 RFM Round Flush Medium
 RFL Round Flush Large
 RSM Round Surface Medium
 RSL Round Surface Large

*Refer to Canopy Specification Guide


WARRANTY

3 Years Fixture
 3 Years Power Supply Unit
 3 Years LED

Orp is a solid fixture that will require very little maintenance over the years.

If your Orp is treated with care, it will shine brightly for many years to come.

Contact us for custom variations.



Installation should only be undertaken by a qualified professional


ORP LARGE



Oblique Rhombic Prism is a pared-back structure that allows sacred geometry and light to come together as one.

ORP emphasises simplicity and form, connecting elements that speak to the links between all formations of life.

ORP LARGE

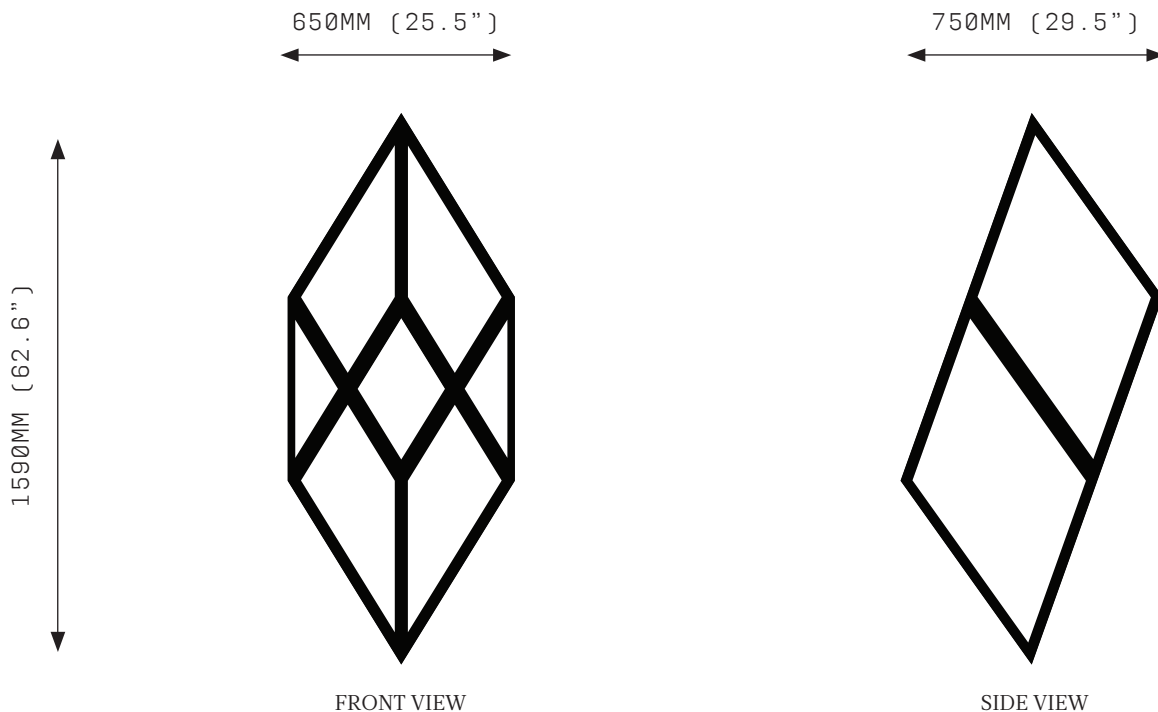

SPECIFICATIONS

Ordering Code:

ORP.L.PC
ORP.L.SS
ORP.L.B

Lamp:

24V LED WW 2700K

Lumens:

9048 LM

Voltage:

24V DC

Watts:

75W

Weight:

Approx. 10-14kg*

*Exclusive of canopy

Inclusions:

Power Supply Unit x 100W

Exclusions:

User Interface, Dimmer Unit

PRODUCT OPTIONS

Finishes:

PCB Powdercoat Matte Black
PCW Powdercoat Matte White
AB Aged Brass
BB Brushed Brass
HRB Hand Rubbed Brass
DB Dark Bronze
MP Mottled Patina
PB Polished Brass
BSS Brushed Stainless Steel
PSS Polished Stainless Steel

Suspension:

V-CAB Vertical Cable

Canopy:*

RFS Round Flush Small
RFM Round Flush Medium
RFL Round Flush Large
RSM Round Surface Medium
RSL Round Surface Large

*Refer to Canopy Specification Guide


WARRANTY

3 Years Fixture
3 Years Power Supply Unit
3 Years LED

Orp is a solid fixture that will require very little maintenance over the years.

If your Orp is treated with care, it will shine brightly for many years to come.

Contact us for custom variations.



Installation should only be undertaken by a qualified professional


ORP XXX



Oblique Rhombic Prism is a pared-back structure that allows sacred geometry and light to come together as one.

ORP emphasises simplicity and form, connecting elements that speak to the links between all formations of life.

ORP XXX

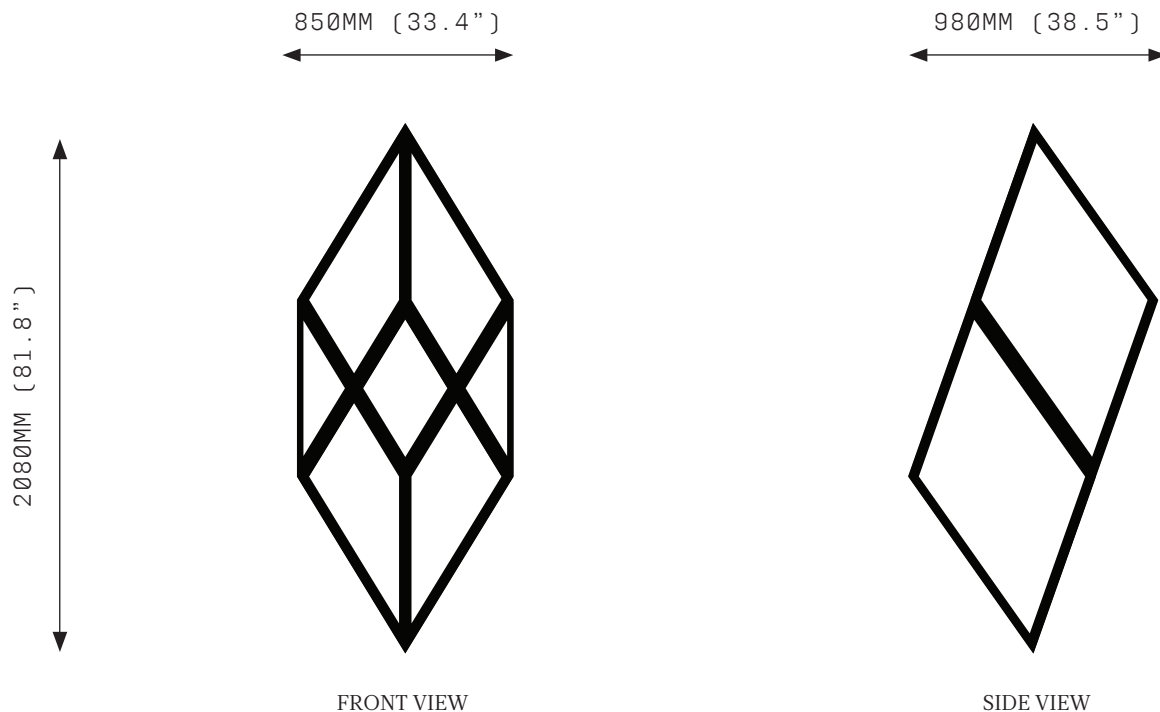

SPECIFICATIONS

Ordering Code:
 ORP.X.PC
 ORP.X.SS
 ORP.X.B

Lamp:
 24V LED WW 2700K

Lumens:
 11472 LM

Voltage:
 24V DC

Watts:
 95W

Weight:
 Approx. 13-18kg*
 *Exclusive of canopy

Inclusions:
 Power Supply Unit x 150W

Exclusions:
 User Interface, Dimmer Unit

PRODUCT OPTIONS

Finishes:
 PCB Powdercoat Matte Black
 PCW Powdercoat Matte White
 AB Aged Brass
 BB Brushed Brass
 HRB Hand Rubbed Brass
 DB Dark Bronze
 MP Mottled Patina
 PB Polished Brass
 BSS Brushed Stainless Steel
 PSS Polished Stainless Steel

Suspension:
 V-CAB Vertical Cable

Canopy: *
 RFS Round Flush Small
 RFM Round Flush Medium
 RFL Round Flush Large
 RSM Round Surface Medium
 RSL Round Surface Large

*Refer to Canopy Specification Guide


WARRANTY

3 Years Fixture
 3 Years Power Supply Unit
 3 Years LED

Orp is a solid fixture that will require very little maintenance over the years.

If your Orp is treated with care, it will shine brightly for many years to come.

Contact us for custom variations.



Installation should only be undertaken by a qualified professional

ORP QUARTZ CRYSTAL

Please fill out this form for each fixture on order

Project Name / Side Mark: _____ PO # _____ Invoice # _____

FIXTURE	SIZE	TOTAL DROP	
		IMPERIAL	METRIC
<input checked="" type="checkbox"/> ORP CRYSTAL QUARTZ	<input type="checkbox"/> Small	13.7 x 15.9 x 33.8 "	350 x 400 x 860 mm
	<input type="checkbox"/> Medium	19.6 x 22.7 x 48.2 "	500 x 580 x 1225 mm
	<input type="checkbox"/> Large	25.5 x 29.5 x 62.6 "	650 x 750 x 1590 mm

Please provide total height, from ceiling to base of fixture*
_____ MM

SURFACE FINISH				QUARTZ
<input type="checkbox"/> Aged Brass	AB	<input type="checkbox"/> Mottled Patina	MP	<input type="checkbox"/> Clear
<input type="checkbox"/> Brushed Brass	BB	<input type="checkbox"/> Brushed Stainless Steel	BSS	<input type="checkbox"/> Gradient
<input type="checkbox"/> Hand Rubbed Brass	HRB	<input type="checkbox"/> Polished Brass	PB	
<input type="checkbox"/> Dark Bronze	DB	<input type="checkbox"/> Polished Stainless Steel	PSS	

CEILING CANOPY (Please refer to Canopy Specification Guide provided)	LED COLOUR TEMPERATURE
<input type="checkbox"/> ROUND FLUSH - SMALL RFS	<input type="checkbox"/> WARM WHITE 2500 - 2700K
<input type="checkbox"/> ROUND FLUSH - MEDIUM RFM	<input type="checkbox"/> NEUTRAL WHITE 3000 - 3300K
<input type="checkbox"/> ROUND FLUSH - LARGE RFL	
<input type="checkbox"/> ROUND SURFACE - MEDIUM RSM	
<input type="checkbox"/> ROUND SURFACE - LARGE RSL	

DIMMING (Please refer to Dimming Fact Sheet and Wiring Diagrams provided)

<input type="checkbox"/> 0-10V	4 wire dimming (additional control cables from dimming module to control required)
<input type="checkbox"/> DALI/DSI	4 wire dimming (additional control cables from dimming module to control required)
<input type="checkbox"/> REMOTE	Lutron Powpak + Pico RF Remote Dimming Module (Stand Alone)
<input type="checkbox"/> N/A	Dimming Modules not required

SPECIFIC CERTIFICATION REQUIREMENTS (All certification requests subject to Production Approval)

<input type="checkbox"/> Y	Please specify _____
<input type="checkbox"/> N	

ORP

Please fill out this form for each fixture on order

Project Name / Side Mark: _____ PO # _____ Invoice # _____

FIXTURE	SIZE	TOTAL DROP	
		IMPERIAL	METRIC
<input checked="" type="checkbox"/> ORP	<input type="checkbox"/> Small	13.7 x 15.9 x 33.8 "	350 x 400 x 860 mm
	<input type="checkbox"/> Medium	19.6 x 22.7 x 48.2 "	500 x 580 x 1225 mm
	<input type="checkbox"/> Large	25.5 x 29.5 x 62.6 "	650 x 750 x 1590 mm
	<input type="checkbox"/> XXX	33.4 x 38.5 x 81.8 "	850 x 980 x 2080 mm

Please provide total height, from ceiling to base of fixture*

MM

SURFACE FINISH

- | | | | |
|--|-----|---|-----|
| <input type="checkbox"/> Aged Brass | AB | <input type="checkbox"/> Polished Brass | PB |
| <input type="checkbox"/> Brushed Brass | BB | <input type="checkbox"/> Polished Stainless Steel | PSS |
| <input type="checkbox"/> Hand Rubbed Brass | HRB | <input type="checkbox"/> Brushed Stainless Steel | BSS |
| <input type="checkbox"/> Dark Bronze | DB | <input type="checkbox"/> Powder Coat Matte Black | PCB |
| <input type="checkbox"/> Mottled Patina | MP | <input type="checkbox"/> Powder Coat Matte White | PCW |

CEILING CANOPY (Please refer to Canopy Specification Guide provided)

LED COLOUR TEMPERATURE

- | | | | | | |
|---|-----|---|-----|--|--------------|
| <input type="checkbox"/> ROUND FLUSH - SMALL | RFS | <input type="checkbox"/> ROUND SURFACE - MEDIUM | RSM | <input type="checkbox"/> WARM WHITE | 2500 - 2700K |
| <input type="checkbox"/> ROUND FLUSH - MEDIUM | RFM | <input type="checkbox"/> ROUND SURFACE - LARGE | RSL | <input type="checkbox"/> NEUTRAL WHITE | 3000 - 3300K |
| <input type="checkbox"/> ROUND FLUSH - LARGE | RFL | | | | |

DIMMING (Please refer to Dimming Fact Sheet and Wiring Diagrams provided)

- 0-10V 4 wire dimming (additional control cables from dimming module to control required)
- DALI/DSI 4 wire dimming (additional control cables from dimming module to control required)
- REMOTE Lutron Powpak + Pico RF Remote Dimming Module (Stand Alone)
- N/A Dimming Modules not required

SPECIFIC CERTIFICATION REQUIREMENTS (All certification requests subject to Production Approval)

- Y Please specify _____
- N