

Rue Sala

Chandelier - Six Arm Pendant

Series
 Rue Sala

Finishes
 Unlacquered brass

120V Illumination
 Integrated LED
 Wattage: 48W
 Lumens: 3,000 Lumens est.
 Color Temperature: 2700 K, 90+ CRI
 LED Lifetime: 50,000 Hours est.
 Dimming: Triac and ELV

Product
 Chandelier - Six Arm Pendant

Glass Color
 Clear

240V Illumination
 Integrated LED
 Wattage: 48W
 Lumens: 3,000 Lumens est.
 Color Temperature: 2700 K, 90+ CRI
 LED Lifetime: 50,000 Hours est.
 Dimming: ELV or 0-10V

Dimensions
 L 55.9in/142cm x W 32.4in/82.4cm x
 H 36in/70.5cm

Suspension
 1/2-inch aluminum stem in matching
 metal finish. 35-inch length included
 with lamp. 72-inch length available
 for additional cost. Stem length can
 be adjusted on site.

Weight
 27.4lb/12.6kg

Materials
 Brass, Glass


Canopy
 10-inch round in matching metal finish

Ceiling Slope
 0° - 10° mounting slope.
 Up to 90° variable hang-straight
 available upon request.

Driver location
 Driver located in the canopy

Certifications
 UL, cUL (120V)
 CE, (240V)

Fixture Mounting
 Designed to be mounted on standard
 4in. Electrical Box.
 Two #8-32 screws included.
 Additional mounting hardware provided
 for 240V versions.

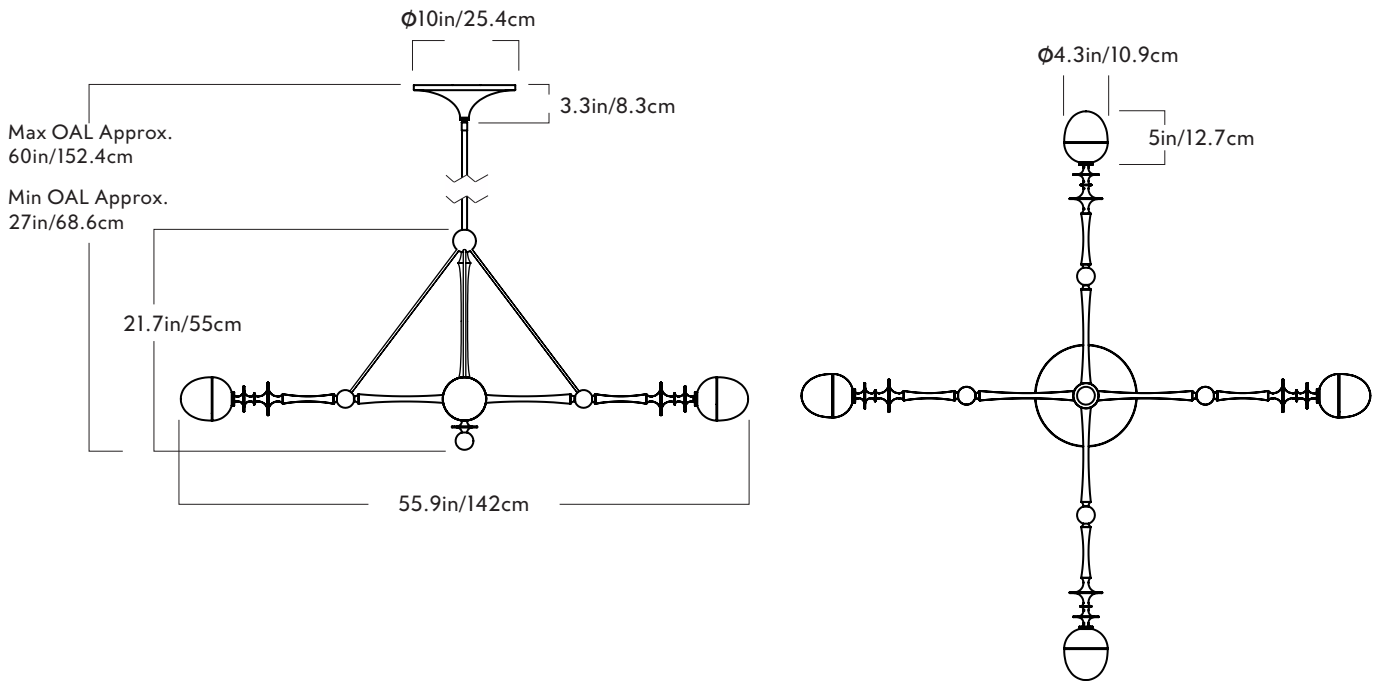

Rue Sala

Pendant - Four Arm Pendant

Series
 Rue Sala

Finishes
 Unlacquered brass

120V Illumination
 Integrated LED
 Wattage: 32W
 Lumens: 2,000 Lumens est.
 Color Temperature: 2700 K, 90+ CRI
 LED Lifetime: 50,000 Hours est.
 Dimming: Triac and ELV

Product
 Chandelier - Four Arm Pendant

Glass Color
 Clear

Dimensions
 L 55.9in/142cm x W 55.9in/142cm x
 H 36in/70.5cm

Suspension
 1/2-inch aluminum stem in matching
 metal finish. 35-inch length included
 with lamp. 72-inch length available
 for additional cost. Stem length can
 be adjusted on site.

240V Illumination
 Integrated LED
 Wattage: 32W
 Lumens: 2,000 Lumens est.
 Color Temperature: 2700 K, 90+ CRI
 LED Lifetime: 50,000 Hours est.
 Dimming: ELV or 0-10V

Weight
 25.8lb/11.7kg

Materials
 Brass, Glass


Canopy
 10-inch round in matching metal finish

Ceiling Slope
 0° - 10° mounting slope.
 Up to 90° variable hang-straight
 available upon request.

Driver location
 Driver located in the canopy

Certifications
 UL, cUL (120V)
 CE, (240V)

Fixture Mounting
 Designed to be mounted on standard
 4in. Electrical Box.
 Two #8-32 screws included.
 Additional mounting hardware provided
 for 240V versions.

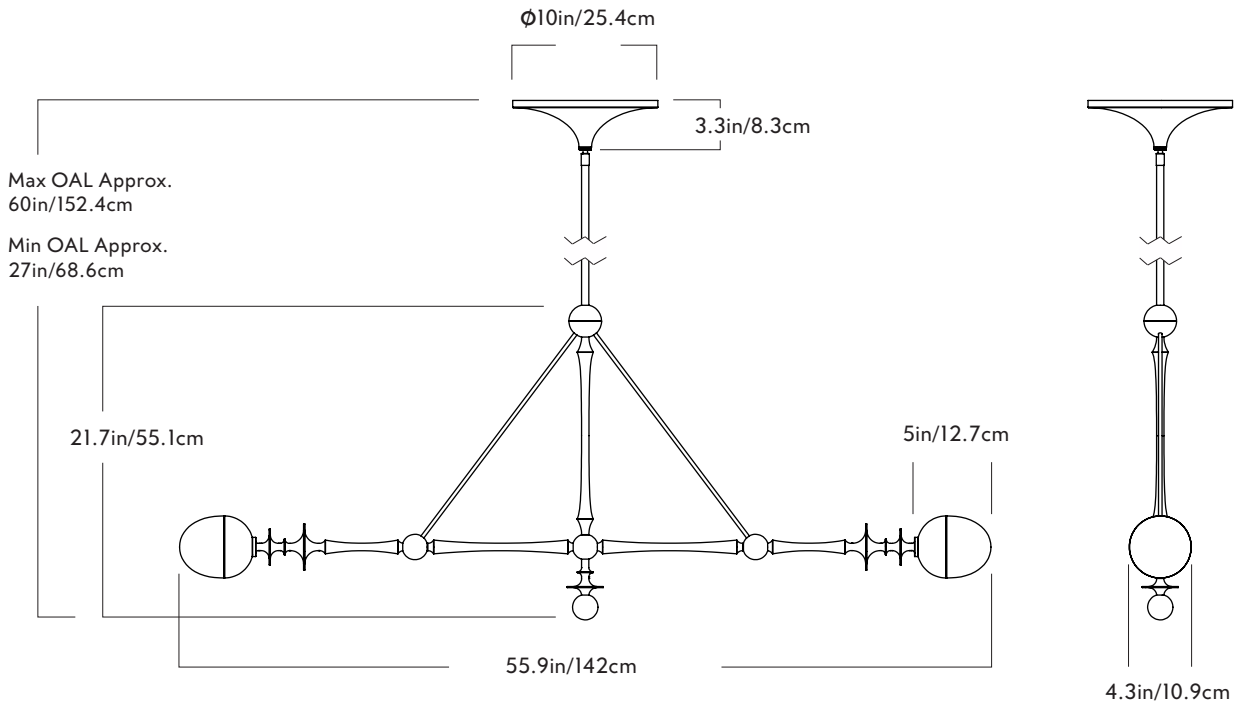

Rue Sala

Chandelier - Two Arm Pendant

Series

Rue Sala

Product

Chandelier - Two Arm Pendant

Dimensions

L 55.9in/142cm x W 4.3in/10.9cm x
 H 36in/70.5cm

Weight

16.5lb/7.5kg

Materials

Brass, Glass

Finishes

Unlacquered brass

Glass Color

Clear

Suspension

1/2-inch aluminum stem in matching metal finish. 35-inch length included with lamp. 72-inch length available for additional cost. Stem length can be adjusted on site.

Canopy

10-inch round in matching metal finish

Ceiling Slope

0° - 10° mounting slope.
 Up to 90° variable hang-straight available upon request.

Certifications

UL, cUL (120V)
 CE, (240V)

120V Illumination

Integrated LED
 Wattage: 16W
 Lumens: 1,000 Lumens est.
 Color Temperature: 2700 K, 90+ CRI
 LED Lifetime: 50,000 Hours est.
 Dimming: Triac and ELV

240V Illumination


Integrated LED
 Wattage: 16W
 Lumens: 1,000 Lumens est.
 Color Temperature: 2700 K, 90+ CRI
 LED Lifetime: 50,000 Hours est.
 Dimming: ELV or 0-10V

Driver location

Driver located in the canopy

Fixture Mounting

Designed to be mounted on standard 4in. Electrical Box.
 Two #8-32 screws included.
 Additional mounting hardware provided for 240V versions.

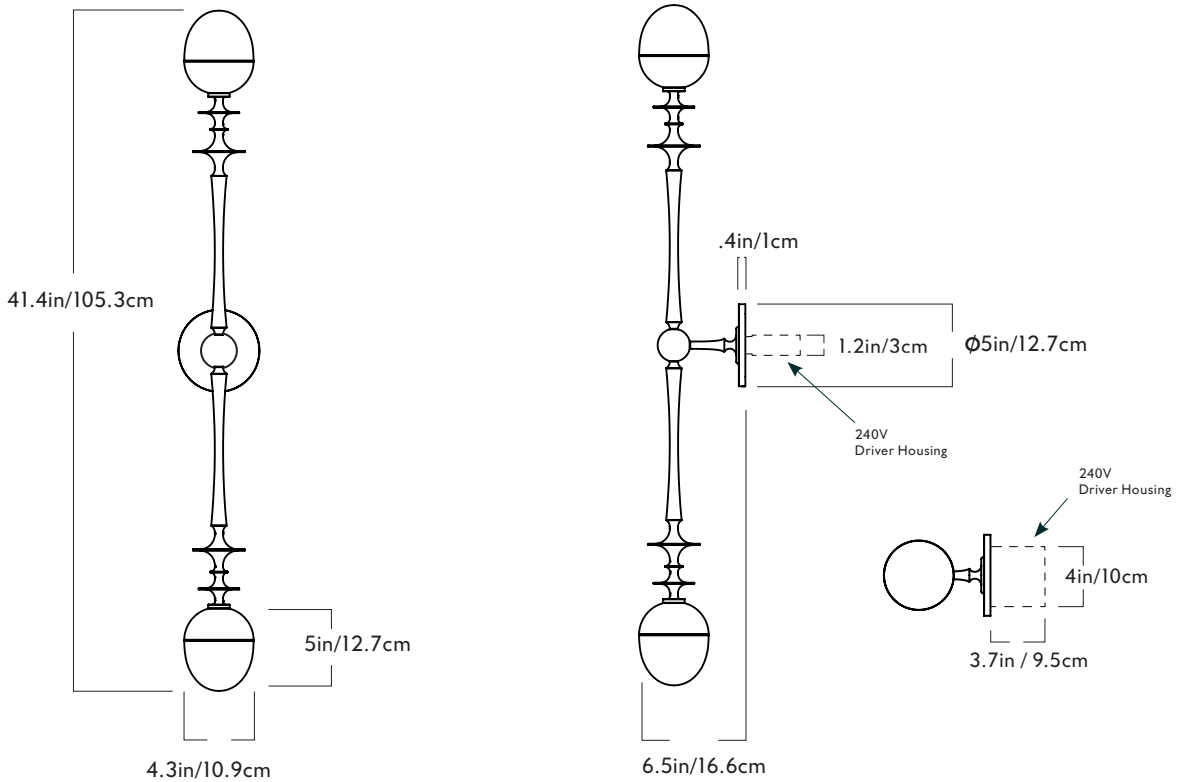

Rue Sala

Series
 Rue Sala

Product
 Sconce - Double Arm

Dimensions
 H 41.4in/105.3cm x W 4.3in/10.9cm x
 D 6.5in/16.6cm

Weight
 8.6lb/3.9kg

Materials
 Brass, Glass

Sconce - Double Arm

Finishes
 Unlacquered brass

Glass Color
 Clear

Back Plate
 5-inch round in matching
 back plate finish


Driver location
 120V: Driver to be installed in the wall
 Electrical Box. Driver dimension are
 L 3.30in / 8.4cm x W 1.57in / 4.0cm x
 H 0.99in / 2.5cm
 240V: Driver in the 240V Driver Hous-
 ing. Housing to be installed in the wall.

Certifications
 UL, cUL (120V)
 CE, (240V)

120V Illumination
 Integrated LED
 Wattage: 10W
 Lumens: 1,000 Lumens est.
 Color Temperature: 2700 K, 90+ CRI
 LED Lifetime: 50,000 Hours est.
 Dimming: Triac and ELV

240V Illumination
 Integrated LED
 Wattage: 16W
 Lumens: 1,000 Lumens est.
 Color Temperature: 2700 K, 90+ CRI
 LED Lifetime: 50,000 Hours est.
 Dimming: ELV or 0-10V

Fixture Mounting
 Designed to be mounted on standard
 4in. Electrical Box.
 Two #8-32 screws included.
 Additional mounting hardware provided
 for 240V versions.

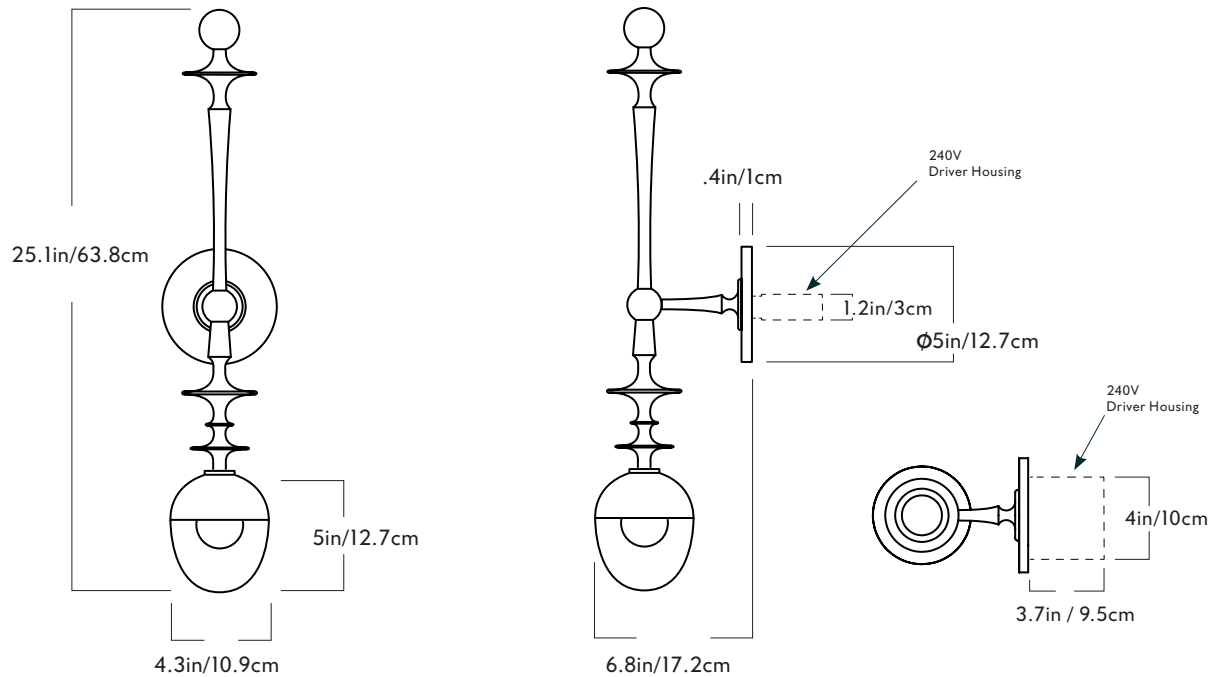

Rue Sala

Series
Rue Sala

Product
Sconce - Single Arm

Dimensions
H 25in/63.8cm x W 4.3in/10.9cm x
D 6.8in/17.2cm

Weight
6.6lb/3kg

Materials
Brass, Glass

Sconce - Single Arm

Finishes
Unlacquered brass

Glass Color
Clear

Back Plate
5-inch round in matching
back plate finish

Driver location
120V: Driver to be installed in the wall
Electrical Box. Driver dimension are
L 3.30in / 8.4cm x W 1.57in / 4.0cm x
H 0.99in / 2.5cm
240V: Driver in the 240V Driver Hous-
ing. Housing to be installed in the wall.

Certifications
UL, cUL (120V)
CE, (240V)


120V Illumination
Integrated LED
Wattage: 8W
Lumens: 500 Lumens est.
Color Temperature: 2700 K, 90+ CRI
LED Lifetime: 50,000 Hours est.
Dimming: Triac and ELV

240V Illumination
Integrated LED
Wattage: 8W
Lumens: 500 Lumens est.
Color Temperature: 2700 K, 90+ CRI
LED Lifetime: 50,000 Hours est.
Dimming: ELV or 0-10V

Fixture Mounting
Designed to be mounted on standard
4in. Electrical Box.
Two #8-32 screws included.
Additional mounting hardware provided
for 240V versions.

Roll & Hill

twentieth
sales@twentieth.net
323.904.1200
www.twentieth.net

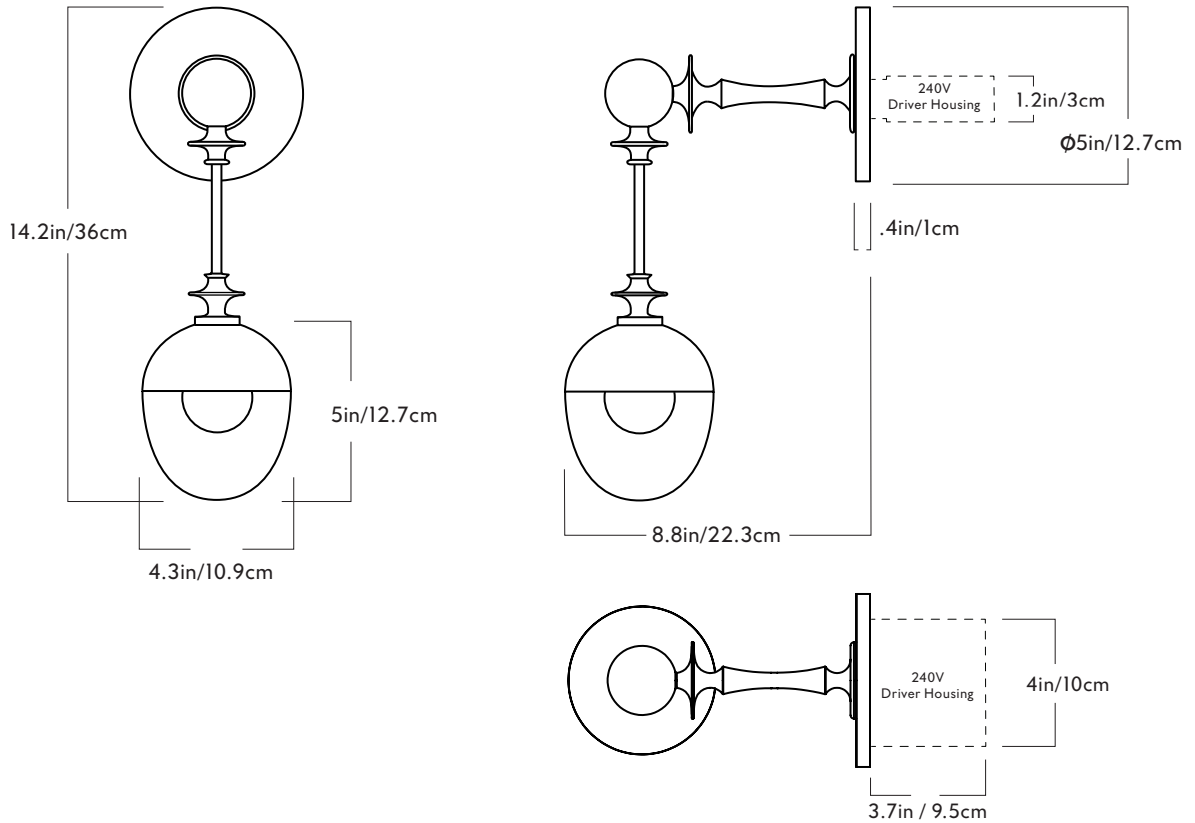

Rue Sala

Series
Rue Sala

Product
Sconce - Corded

Dimensions
H 14.2in/36cm x W 4.3in/10.9cm x
D 8.8in/22.3cm

Weight
4.6lb/2kg

Materials
Brass, Glass

Sconce - Corded

Finishes
Unlacquered brass

Glass Color
Clear

Cord Color
Overbraided burgundy cotton

Back Plate
5-inch round in matching
back plate finish

Driver location
120V: Driver to be installed in the wall
Electrical Box. Driver dimension are
L 3.30in / 8.4cm x W 1.57in / 4.0cm x
H 0.99in / 2.5cm
240V: Driver in the 240V Driver Hous-
ing. Housing to be installed in the wall.

Certifications
UL, cUL (120V)
CE, (240V)

120V Illumination
Integrated LED
Wattage: 8W
Lumens: 500 Lumens est.
Color Temperature: 2700 K, 90+ CRI
LED Lifetime: 50,000 Hours est.
Dimming: Triac and ELV

240V Illumination
Integrated LED
Wattage: 8W
Lumens: 500 Lumens est.
Color Temperature: 2700 K, 90+ CRI
LED Lifetime: 50,000 Hours est.
Dimming: ELV or 0-10V

Fixture Mounting
Designed to be mounted on standard
4in. Electrical Box.
Two #8-32 screws included.
Additional mounting hardware provided
for 240V versions.