

Image shown above 73.20 with round canopy

Series	73
Mounting	Ceiling mounted
Glass Colours	Clear, grey 1, grey 2, grey 3
Lamp	1.5W LED, 2500K, 130lm 10W Xenon, 2600K, 81lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 73.1 - 73.3 Non-adjustable length: 73.8 - 73.20
Canopy Finishes	73.1 - 73.3: white, black or brushed nickel canopy 73.1mi/mo: white polyurethane canopy 73.8 - 73.20: white canopy
Materials	Blown glass, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 73.1m/mo/mi Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US D762,323 S EU 002633230-0001 - 0003


Weight (kg)

○		□	
Round		Rectangle	
73.1	2.7	73.8	32
73.3	8	73.11	40
73.8	33	73.20	68
73.11	43		
73.20	69		
□			
Square			
73.20	75		


Certifications



ADJUSTABLE LENGTH

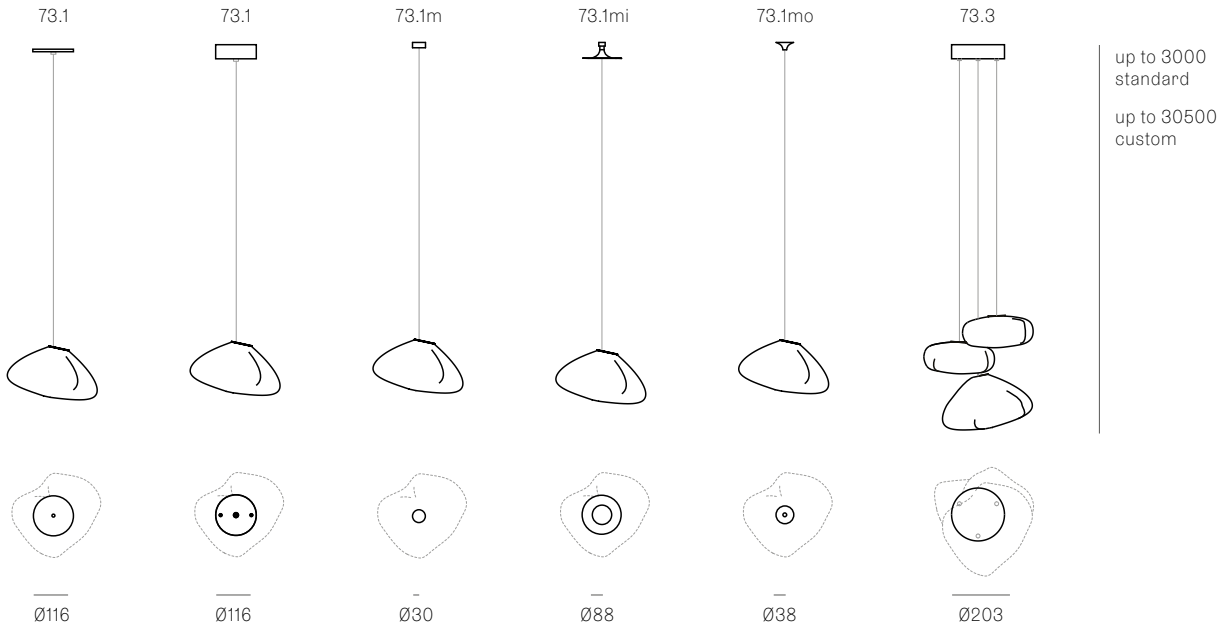

NON-ADJUSTABLE LENGTH

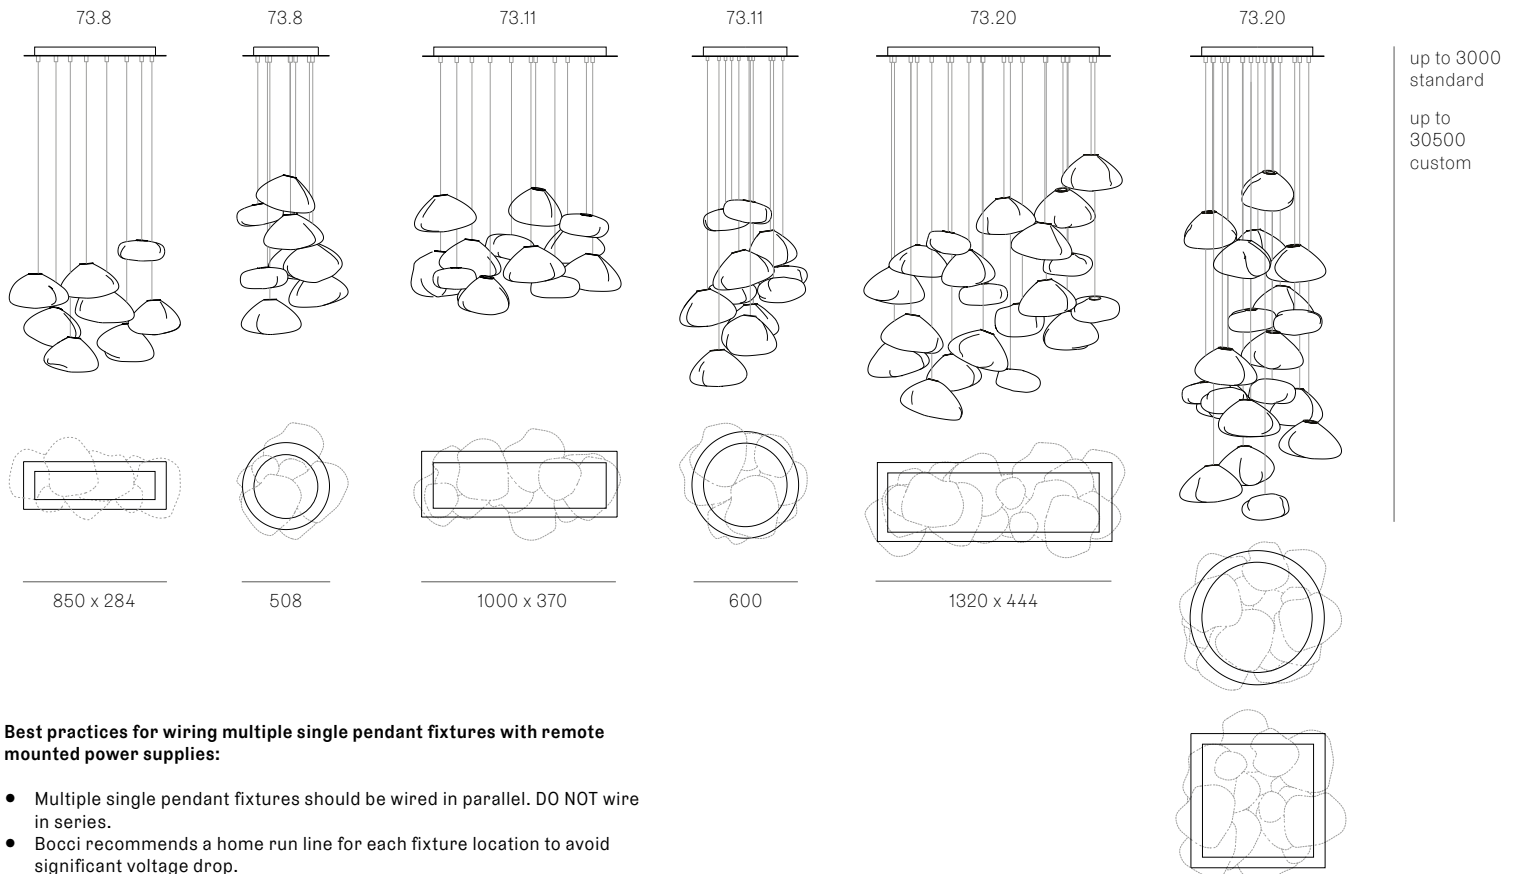

Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.

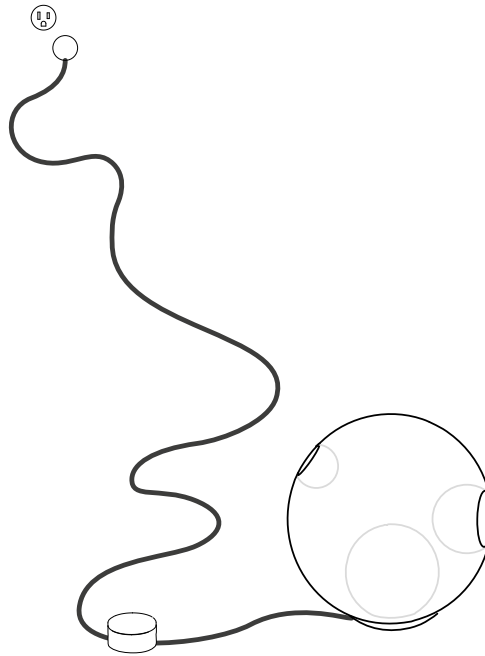


Image shown above 28t

Series 28, 38V, 57, 73, 84, 84V, 100, 118

Glass Colours 28: Clear, colour pendants
 38V: Clear
 57: Grey, white, light mirror, dark mirror
 73: Clear, grey 1, grey 2, grey 3
 84/84Vt: White/copper
 100: Frosted clear, frosted grey
 118: White

Lamp 1.5W LED, 2500K, 130lm
 84/84V, 1.5W LED, 3500K, 130lm

Plug Types Type A - 110V
 Type C - 230V
 Type G - 230V
 Type I - 230V

Base Ø75mm

Cable length 2290mm black flexible cord

Finish Unlacquered brass base and dial control

Materials Glass, brass, electrical components

Power Supply Integral, dial control with build-in dimmer
 Input 100-240V, 0.5A 50-60Hz
 Output 12V
 Ta 25°C

Dimming Built-in dimmer ONLY

Environment Indoor, dry location. IP30

Note The brass used in our Table Light is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.


Patent # 28: US D687,740
 EU 001695834-001 to 004
 38V: EU 002071019-001
 57: US D796732
 EU 002268581-0001 to 0006
 73: US D762,323 S
 EU 002633230-0001 - 0003
 84: EU 003611144-0001 to 0004
 100: US Patent pending
 EU 008526131-0001
 118: Worldwide patents pending

Certifications




Weight (kg)


28t	1	84t	2
38Vt	2.5	84Vt	2
57t	2	100t	4
73t	2.7	118t	3.6

PLUG TYPES


Type A




Type C




Type G




Type I

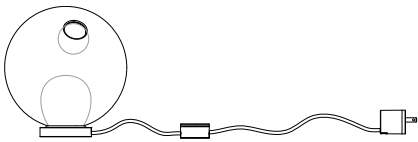TABLE LIGHT $\pm \text{Ø}165$ 


28t

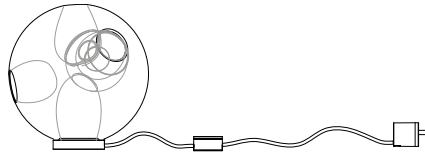 $\text{Ø}190 - 215$ 


38Vt

 $100 - 150$ 


57t

 $\pm 230 - 380$ 


73t

 $\pm \text{Ø}100 - 120$ 

84t

 $\pm \text{Ø}135$ 

84Vt

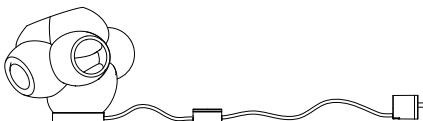 ± 190 

100t

 $\pm \text{Ø}140 - 160\text{mm}$ 

118t

All dimensions are in millimeters (mm)
unless otherwise specified.


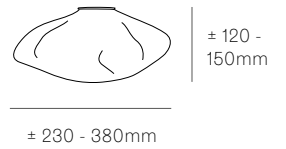


Image shown above 73sp


Series	73
Mounting	Wall mounted
Glass Colours	Grey 1, grey 2, grey 3
Lamp	1.5W LED, 2500K, 130lm 10W Xenon, 2600K, 81m (73s & 73sp ONLY)
Canopy Finishes	73s/sp: White canopy 73s Brass: Brass
Materials	Blown glass, electrical components, steel canopy. Brass canopy for 73s Brass.
Power Supply	73s & 73s Brass: Remote mounted 73sp: Integral Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	73s/sp: Indoor/outdoor, wet location. IP55
Note	Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US D762,323 S EU 002633230-0001 - 0003

Certifications

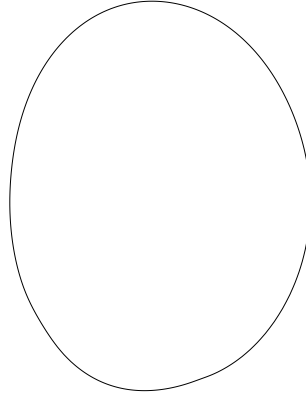


Weight (kg)

73s	3.7
73sp	3.7
73s Brass	3.7

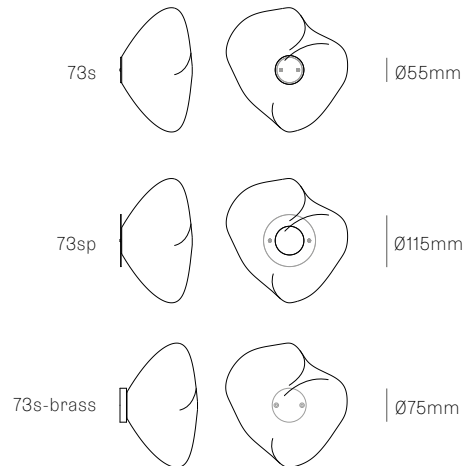


XXXT
SPECIFICATION

- Pendant** One
- Material** Brass base and dial control
- Cable** Black flexible cord, 2290mm
- Plug Type** Type A - 110V
Type C - 230V
Type G - 230V
Type I - 230V

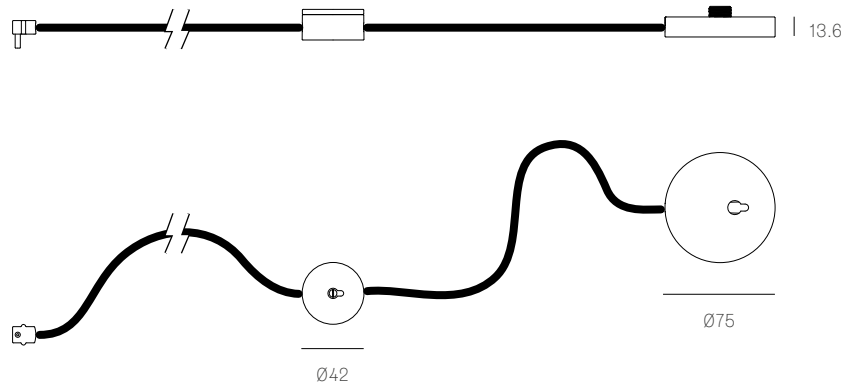

44T
SPECIFICATION


- Pendant** One
- Material** Black base and dial control
- Cable** Black flexible cord, 2290mm
- Plug Type** Type A - 110V
Type C - 230V
Type G - 230V
Type I - 230V

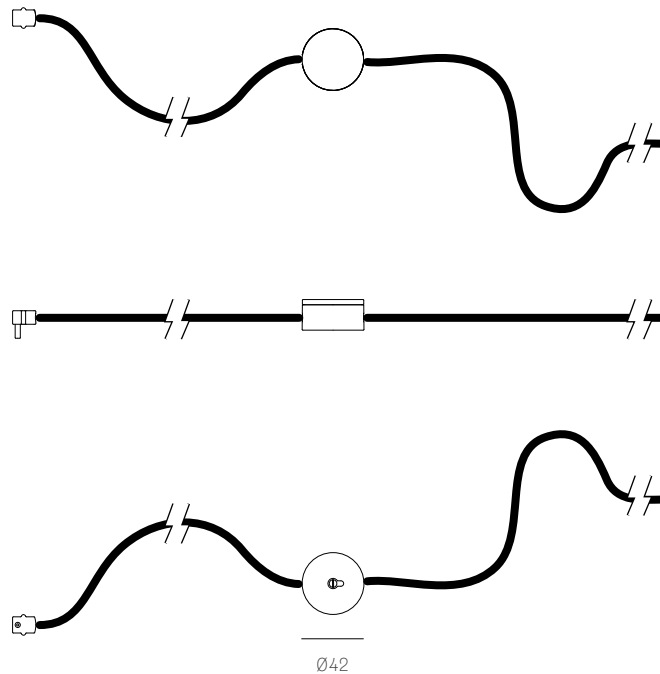

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.1
SPECIFICATION

Pendant	One
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral Remote for select markets only




XXX.1 DEEP
SPECIFICATION

Pendant	One
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

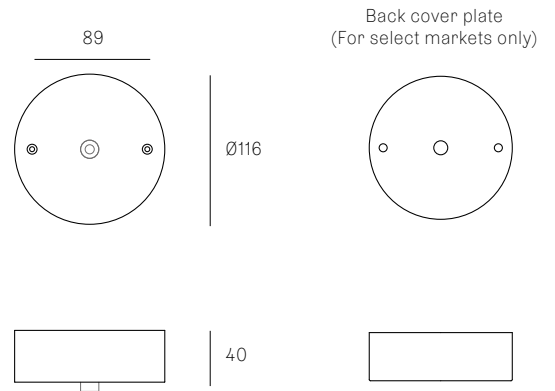


XXX.1M
SPECIFICATION

Pendant	One
Materials	Brushed nickel or white powder coated zinc cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote



XXX.1MI
SPECIFICATION


Pendant	One
Material	White polyurethane
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote



All dimensions are in millimeters (mm) unless otherwise specified.


XXX.1M0
SPECIFICATION

Pendant	One
Material	White polyurethane
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Remote




XXX.3
SPECIFICATION

Pendants	Three
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

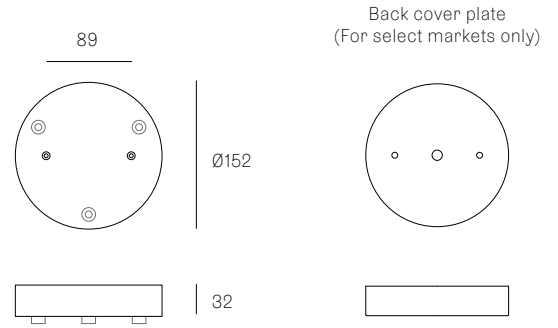


73.3
SPECIFICATION

Pendants	Three
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

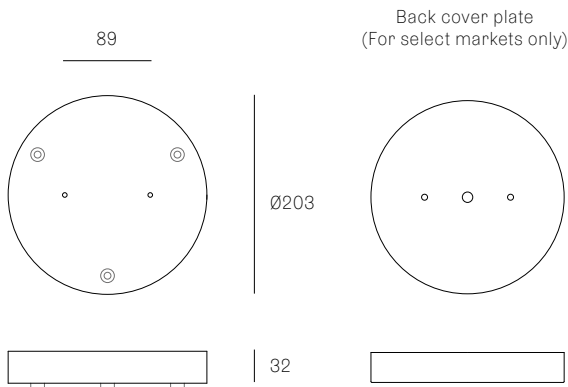

XXX.5
SPECIFICATION


Pendants	Five
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

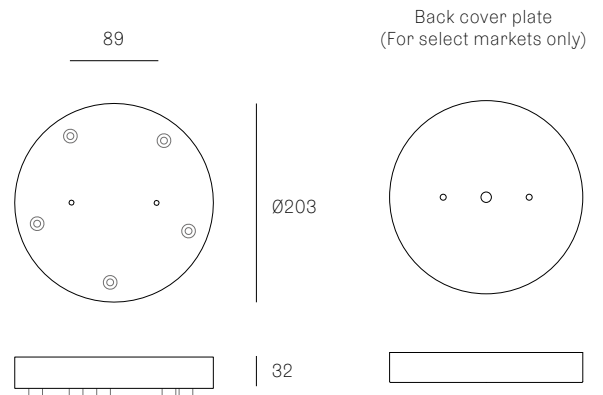

All dimensions are in millimeters (mm) unless otherwise specified.

XXX.7
SPECIFICATION


Pendants	Seven
Materials	Brushed nickel, white or black powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral

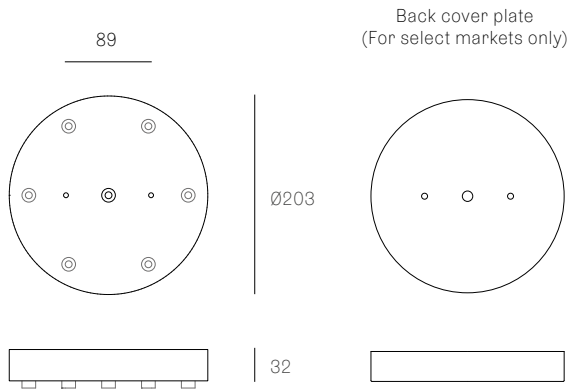

All dimensions are in millimeters (mm) unless otherwise specified.


38.8V / 73.8 RECTANGLE
SPECIFICATION

Pendants	Eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 138 x 16

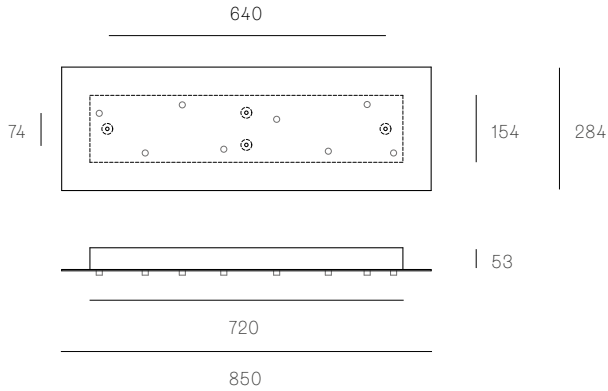


38.8V / 73.8 ROUND
SPECIFICATION

Pendants	Eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	∅362 x 16

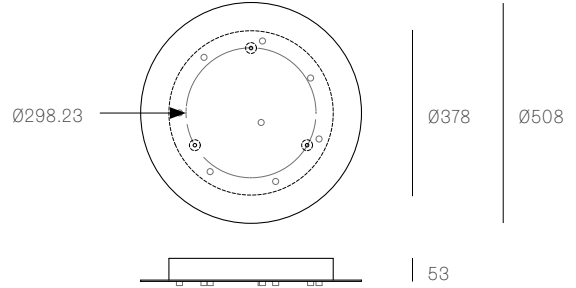


XXX.9 RECTANGLE
SPECIFICATION

Pendants	Nine
Material	White powder coated stainless steel cover
Cable	Coaxial cable Adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1108 x 132 x 16

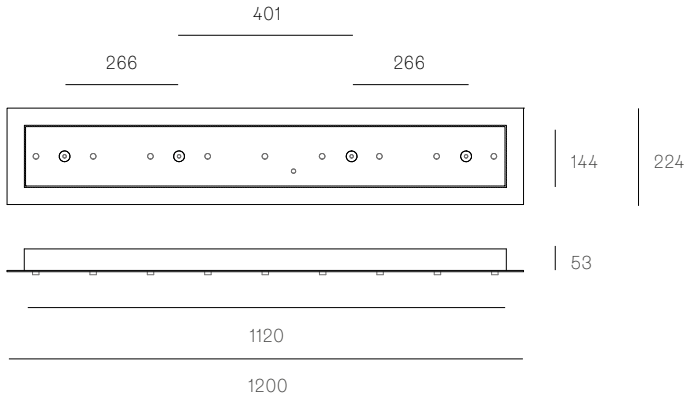

XXX.11 RECTANGLE
SPECIFICATION


Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 138 x 16

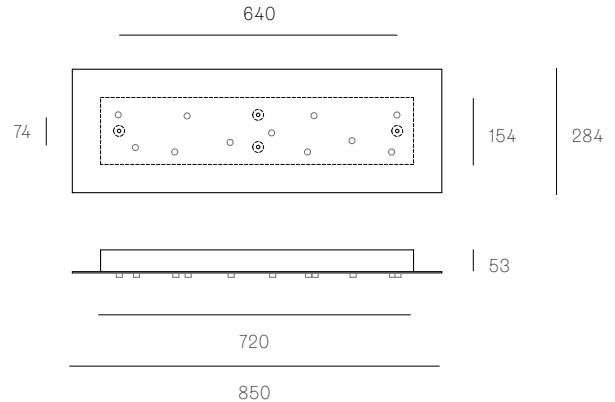

All dimensions are in millimeters (mm) unless otherwise specified.


38.11V / 73.11 RECTANGLE
SPECIFICATION

Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	854 x 224 x 16

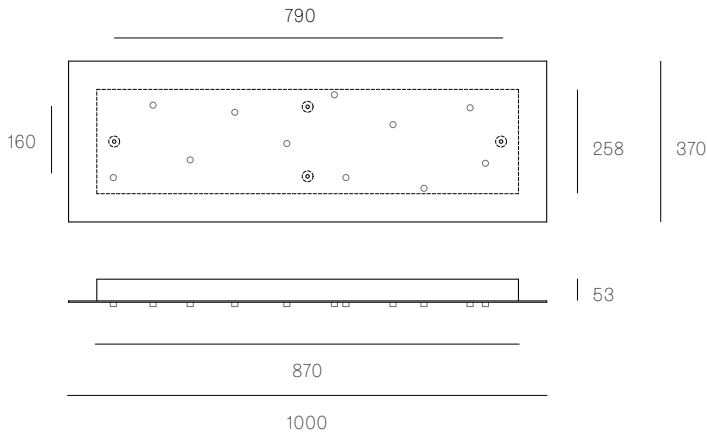


XXX.11 ROUND
SPECIFICATION

Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø362 x 16

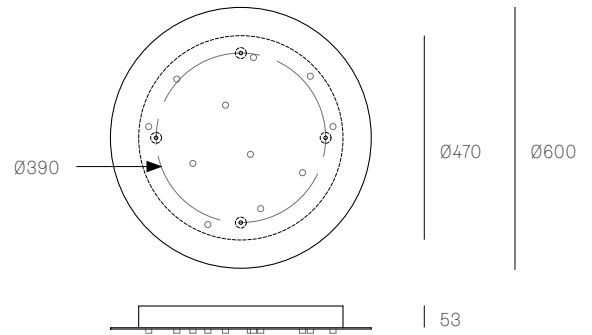


XXX.11 SQUARE
SPECIFICATION

Pendants	Eleven
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	362 x 362 x 16

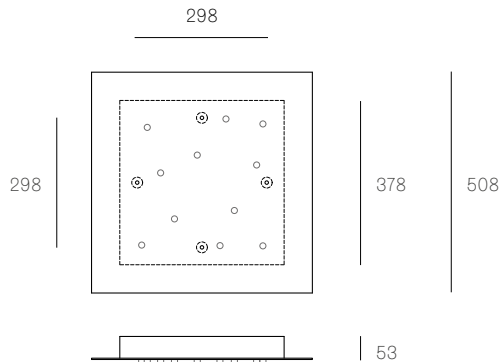

XXX.14 RECTANGLE
SPECIFICATION


Pendants	Fourteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 138 x 16

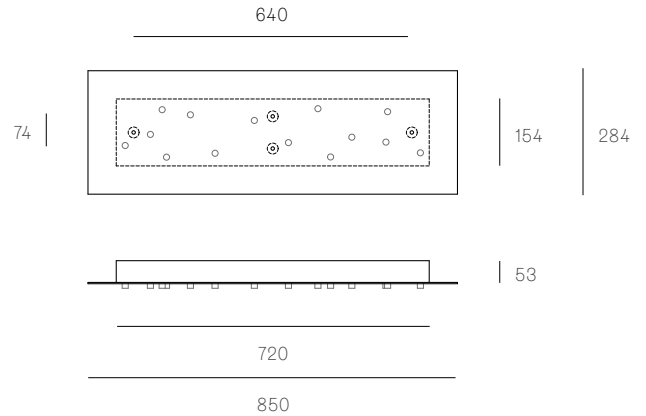

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.14 ROUND
SPECIFICATION

Pendants	Fourteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø362 x 16

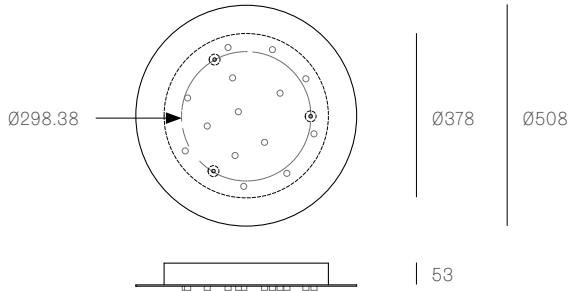


XXX.16 RECTANGLE
SPECIFICATION

Pendants	Sixteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	954 x 224 x 16

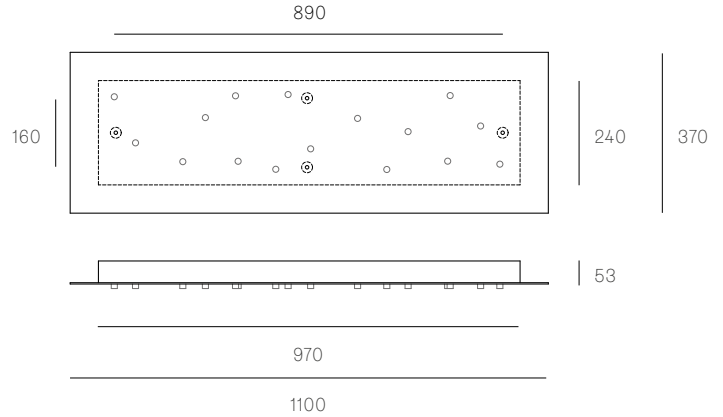


XXX.16 SQUARE
SPECIFICATION

Pendants	Sixteen
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	454 x 454 x 16

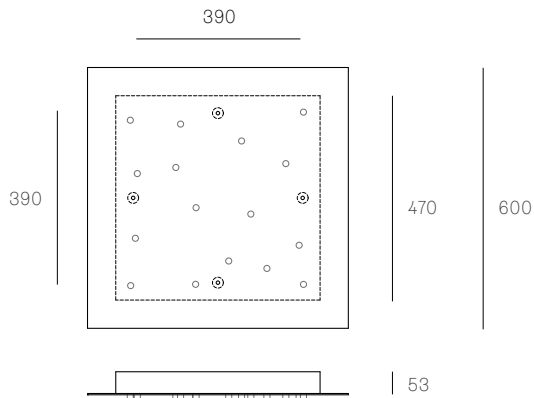

XXX.20 RECTANGLE
SPECIFICATION


Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1174 x 154 x 16

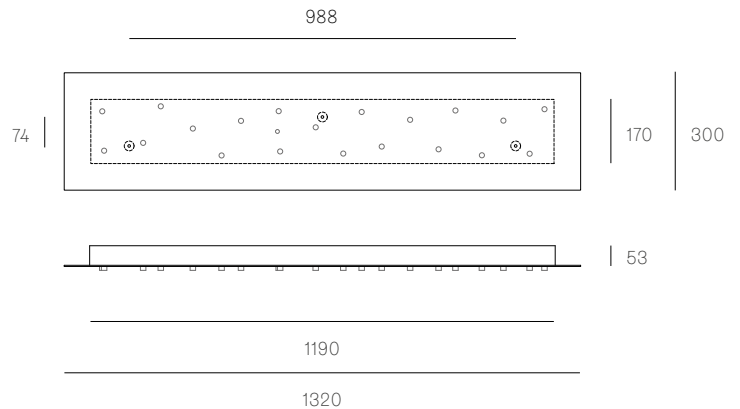

All dimensions are in millimeters (mm) unless otherwise specified.


73.20 RECTANGLE
SPECIFICATION

Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1174 x 299 x 16

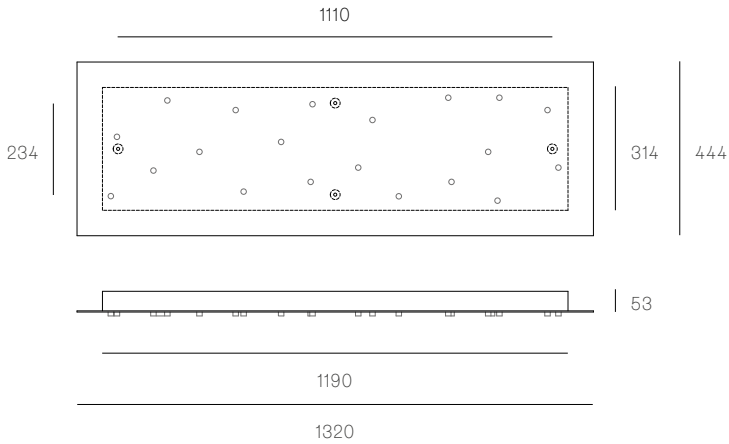


XX.20 ROUND
SPECIFICATION

Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø609 x 16

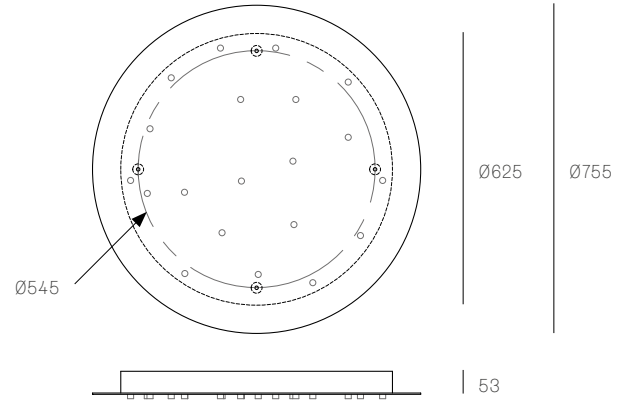


73.20 SQUARE
SPECIFICATION

Pendants	Twenty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

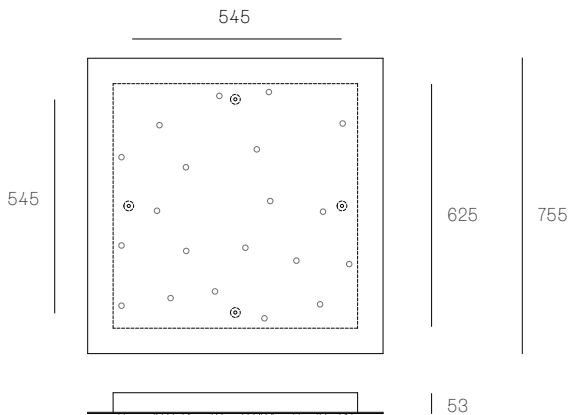

XXX.21 RECTANGLE
SPECIFICATION


Pendants	Twenty-one
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	704 x 135 x 16

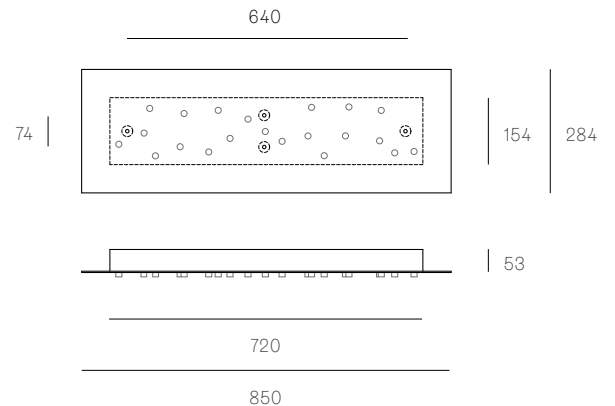

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.26 RECTANGLE
SPECIFICATION

Pendants	Twenty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	854 x 189 x 16

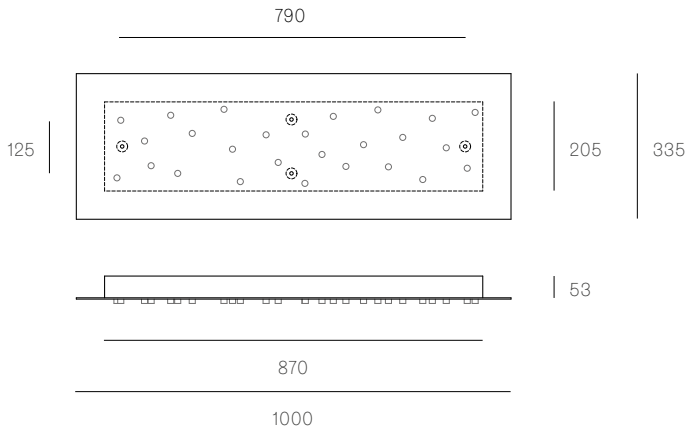


XXX.26 ROUND
SPECIFICATION

Pendants	Twenty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø454 x 16

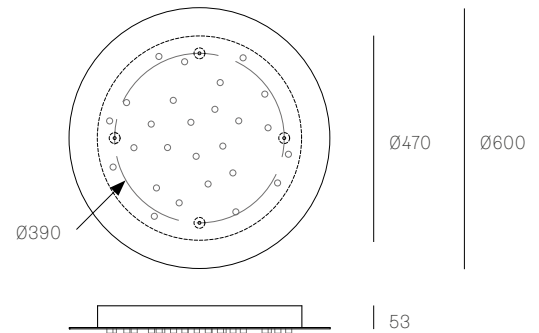


XXX.26 SQUARE
SPECIFICATION

Pendants	Twenty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	454 x 454 x 16

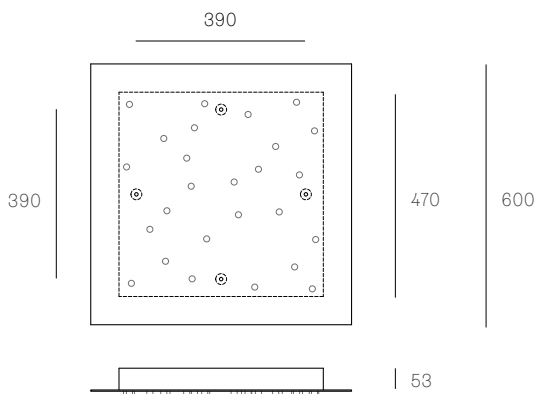

XXX.28 RECTANGLE
SPECIFICATION


Pendants	Twenty-eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	1174 x 298 x 16

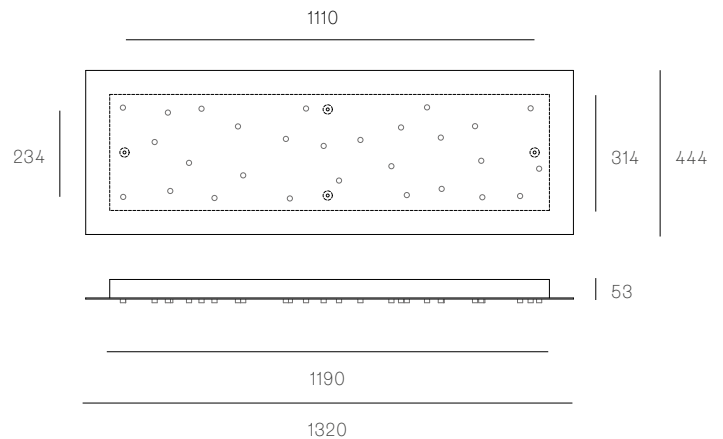

All dimensions are in millimeters (mm) unless otherwise specified.


XXX.28 SQUARE
SPECIFICATION

Pendants	Twenty-eight
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

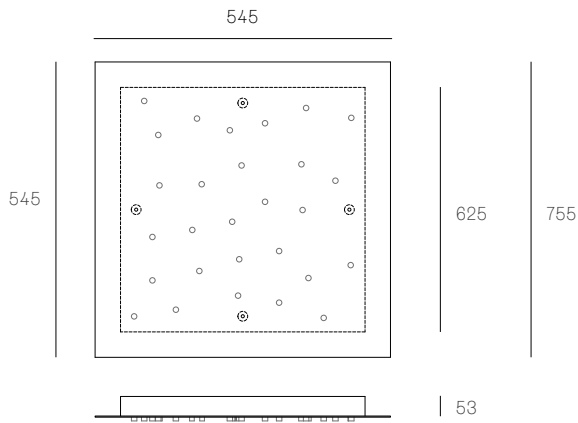


XXX.36 RECTANGLE
SPECIFICATION

Pendants	Thirty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	954 x 224 x 16

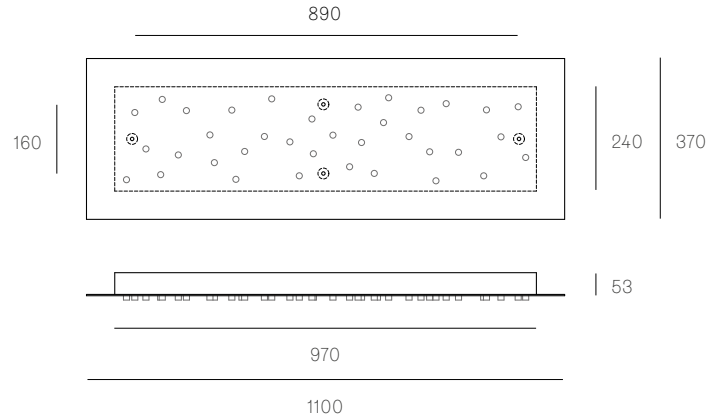


XXX.36 ROUND
SPECIFICATION

Pendants	Thirty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	Ø609 x 16

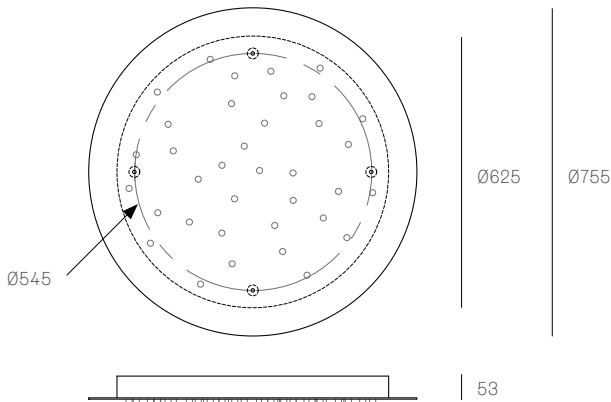

XXX.36 SQUARE
SPECIFICATION


Pendants	Thirty-six
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

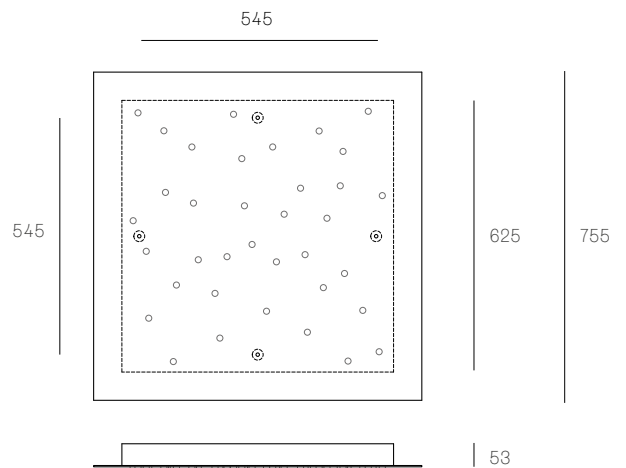

All dimensions are in millimeters (mm) unless otherwise specified.

XXX.50 SQUARE
SPECIFICATION


Pendants	Fifty
Material	White powder coated stainless steel cover
Cable	Coaxial cable Non-adjustable. 3000 standard / up to 30500 maximum
Power Supply	Integral
Wood Backing	609 x 609 x 16

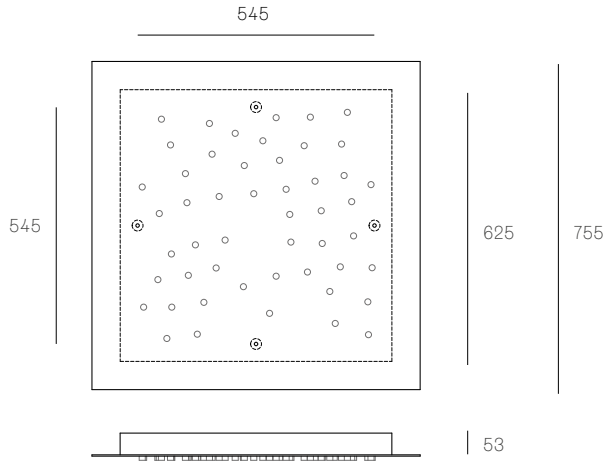

All dimensions are in millimeters (mm)
unless otherwise specified.


XXXS
SPECIFICATION

Pendant One
Material White powder coated stainless steel cover
Power Supply Remote

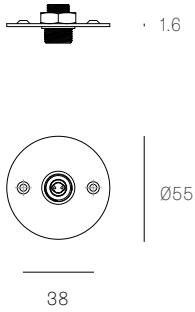


XXXSP
SPECIFICATION

Pendant One
Material White powder coated stainless steel cover
Power Supply Integral
 Remote for select markets only

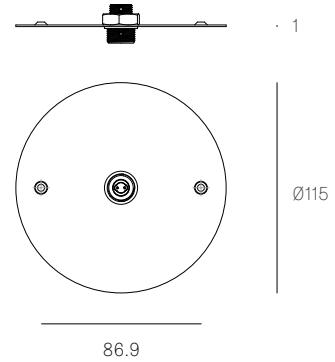


76S
SPECIFICATION

Pendant One
Material White powder coated stainless steel cover
Power Supply Remote

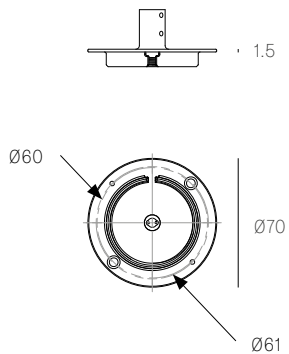

76SP
SPECIFICATION


Pendant One
Material White powder coated stainless steel cover
Power Supply Integral
 Remote for select markets only

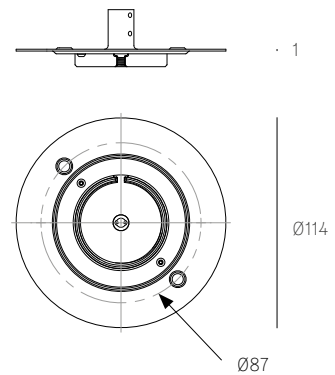

All dimensions are in millimeters (mm) unless otherwise specified.

XXXS BRASS
SPECIFICATION

Pendant	One
Material	Brass base
Power Supply	Remote

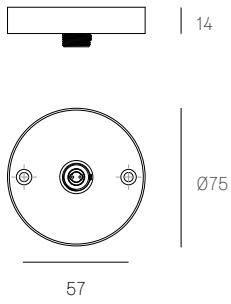

All dimensions are in millimeters (mm)
unless otherwise specified.