



POLAR

WALL LIGHT

A circular motif is used throughout the Polar collection defining its minimal operative form. The Polar Wall Light utilises a unique hinge joint allowing the disc to pivot up or down, softly directing the light output. Polar's anodised gold wall canopy provides a beautiful base for the light to mount onto the wall and houses the fully dimmable LED module.

The wall light is available in a pivot or fixed variation. The disk is available in two sizes and various painted finish options.

AVAILABLE FINISHES



TECHNICAL


MATERIAL	ANODISED ALUMINIUM AND PAINTED ALUMINIUM
LAMPING	240V - 10W LED MODULE, 990 LM 3000K WARM WHITE, DIMMABLE 120V - 13W LED MODULE, 1190 LM 2900K WARM WHITE, DIMMABLE (120V SUPPLIED FOR NORTH AMERICA/CANADA)
LED LIFESPAN	15,000 HRS
CONTROL	PHASE (TRAILING EDGE/LEADING EDGE) - DIMMING RANGE 5 - 100%. DIGITAL / SMART SYSTEMS (DALI/CBUS) - NON-DIMMABLE, ON/OFF FUNCTIONALITY ONLY VIA DALI SWITCH. 1-10V / 0-10V - NOT COMPATIBLE **FOR OPTIMAL DIMMING PERFORMANCE WE RECOMMEND SOURCING A ROTARY OR PUSH BUTTON DIMMER WITH ADJUSTMENT DIAL CAPABLE OF SETTING THE DIMMING RANGE OF THE FIXTURE.
IP RATING	IP20 - FOR DRY INDOOR USE ONLY
CERTIFICATION	AU/NZ AS/NZS 60598.1, 60598.2.1 EU EN 60598.1, 60598.2.1 US/CAN ETL/UL 1598, CSA C22.2#250.0

PRODUCT CODES SKU	EG. PW.S.P-PNK= POLAR WALL Ø300 IN WHITE
PW.S.XXX	POLAR WALL LIGHT Ø300 (PIVOT)
PW.S.XXX-F	POLAR WALL LIGHT Ø300 FIXED VARIATION
PW.L.XXX-F	POLAR WALL LIGHT Ø450 FIXED VARIATION

**Ø450 SIZE NOT AVAILABLE WITH PIVOT OPTION

FINISHES FOR ALL VARIATIONS:	WHITE PAINTED (P-WHT), BLACK PAINTED (P-BLK), GREEN PAINTED (P-GRN) AND GOLD METALLIC PAINTED (P-GLD)
DIMENSIONS	Ø300X53MM / Ø11.8X2.1" Ø450X53MM / Ø17.7X2.1"
WEIGHT	1KG / 2.2LB
PACKAGING	Ø300 - 35X35X7CM / 17.8X17.8X2.8" Ø450 - 50X50X7CM / 19.7X19.7X2.8
PACKAGING WEIGHT	1.5KG / 3.3LB

DIMENSIONS

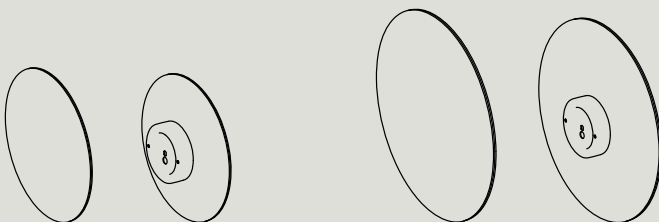

PW.S
Ø300 D53 CANOPY Ø130
Ø11.8" D2.1" CANOPY Ø5.1"

PW.L
Ø450 D53 CANOPY Ø130
Ø17.7" D2.1" CANOPY Ø5.1"

twentieth
www.twentieth.net
sales@twentieth.net
323.904.1200